



APPROVED: _____
 DATE: _____ TITLE: _____





Rev	AWO #	Description	Date	Appr
-		RELEASED	3/28/18	
A		ADDED LAYOUT	1/3/20	AY/NL

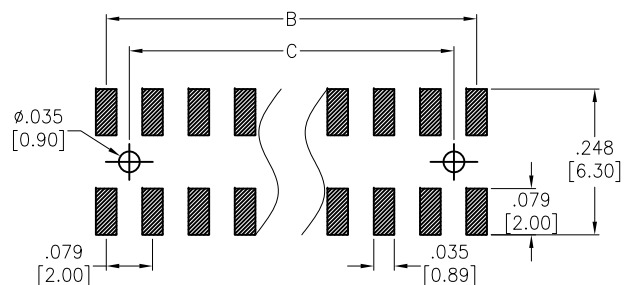

RECOMMENDED PCB LAYOUT

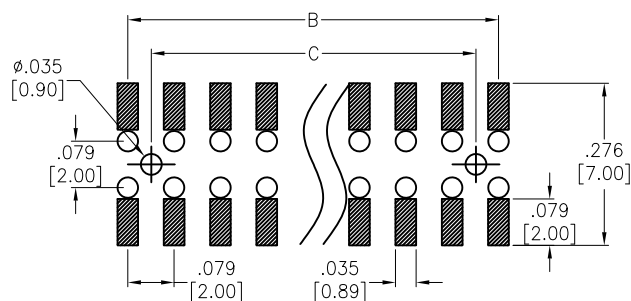

RECOMMENDED PCB LAYOUT

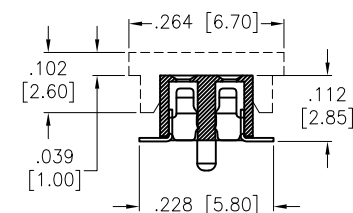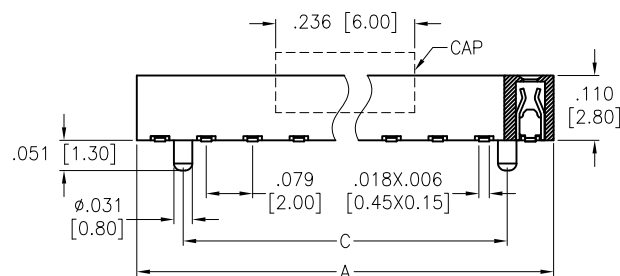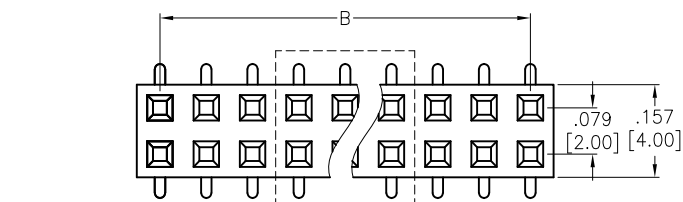

SPECIFICATIONS:

Material:

Insulator: Hi-Temp Thermoplastic, rated UL 94V-0

Insulator color: Black

Contacts: Copper Alloy

Plating:

Gold flash over Nickel underplate overall

Electrical:

Current rating: 2 Amp

Contact resistance: 20 mohms max

Insulation resistance: 1000 Mohms min

Dielectric withstanding voltage: 500 VAC

Temperature Rating:

-40°C to +105°C

Environmental:

Lead free, RoHS compliant.



PACKAGED ON TAPE & REEL

Positions: 04 thru 80

A = .079 [2.00] x No. of Positions per Row

B = .079 [2.00] x No. of Space

C = .079 [2.00] x No. of Space - .079 [2.00]

UNLESS OTHERWISE SPECIFIED
 ALL DIMENSIONS ARE INCHES [MM]
 TOLERANCES: EXCEPT AS NOTED

INCHES	HOLES
.X ± .10	Ø.X ± .10
.XX ± .020	Ø.XX ± .015
.XXX ± .015	Ø.XXX ± .010

APPROVALS

DRAWN	AY	3/28/18
CHECKED	DH	3/28/18
APPROVED		

ADAM
TECH
 INTERCONNECTS

909 Rahway Avenue,
 Union, NJ 07083
 Phone: 908-687-5000
 Fax: 908-687-5710

TITLE
 .079 x .079 DUAL ROW RECEPTACLE STRIP
 .110 [2.80] HEIGHT, SMT, CAP, TAPE & REEL

SIZE X	PART NO. 2RS2T-A-XX-G-SMT-P-PP-T/R	REV. A
REF: S00111C	SCALE: NTS	SHEET 1 OF 1