


APPROVED: _____

DATE: _____ TITLE: _____


Rev	AWO #	Description	Date	Appr
-		RELEASED	11/13/18	
A		UPDATE DRAWING	6/7/21	JJ/TL
B		UPDATE DRAWING	8/29/22	JJ/TY
C		UPDATE DRAWING	12/12/23	JJ/ML

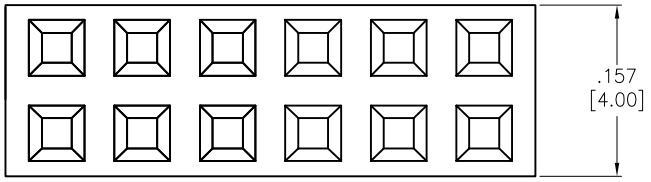

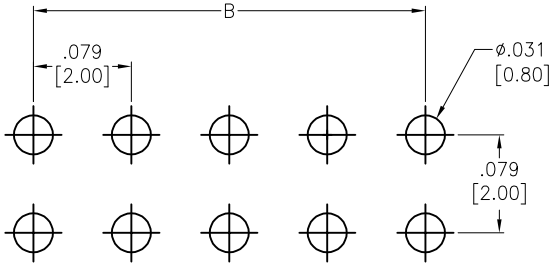

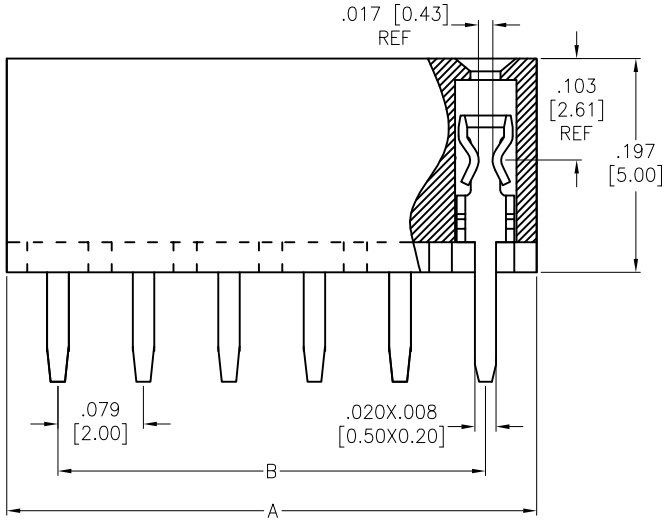

RECOMMENDED PCB LAYOUT

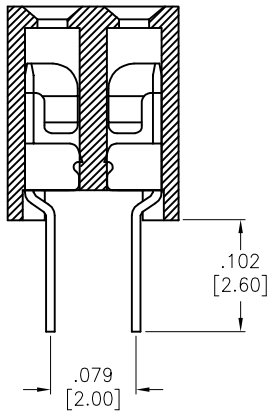

PECIFICATIONS:

Material:

Insulator: Hi-Temp Thermoplastic, rated UL 94V-0

Insulator color: Black

Contacts: Phosphor Bronze

Plating:

15u" Gold over Nickel underplate on contact area

Gold flash over Nickel underplate on solder tails

Electrical:

Current rating: 2 Amp.

Contact resistance: 20 mohms max.

Insulation resistance: 1,000 Mohms min.

Dielectric withstanding voltage: 500 VAC.

Temperature Rating:

-40°C to +105°C

Environmental:

Lead free, RoHS compliant RoHS COMPLIANT

Positions: 04 thru 80

A = .079 [2.00] x No. of Positions per Row + .016 [0.40]

B = .079 [2.00] x No. of Spaces

UNLESS OTHERWISE SPECIFIED ALL DIMENSIONS ARE INCHES [MM]. TOLERANCES: EXCEPT AS NOTED

INCHES		HOLES	
.X	± .10	Ø.X	±.10
.XX	± .020	Ø.XX	±.015
.XXX	± .015	Ø.XXX	±.010

DRAWN	AY	11/13/18
CHECKED	SL	11/13/18
APPROVED		

THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY AND SHOULD NOT BE USED WITHOUT PRIOR WRITTEN PERMISSION FROM ADAM TECH

ADAM TECH
909 Rahway Avenue,
Union, NJ 07083
Phone: 908-687-5000
Fax: 908-687-5710

TITLE: .079 [2.00] DUAL ROW RECEPTACLE STRIP, .197 [5.00] HEIGHT, 15u" GOLD PLATED, DIP TYPE

SIZE	PART NO.	REV.
X	2RS2Y-XX-G-15-HT	C

REF: S00111C | SCALE: NTS | SHEET 1 OF 1