
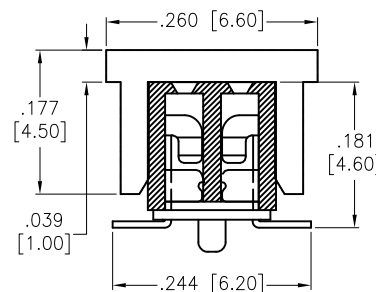
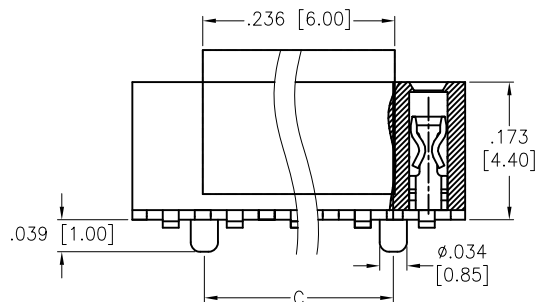
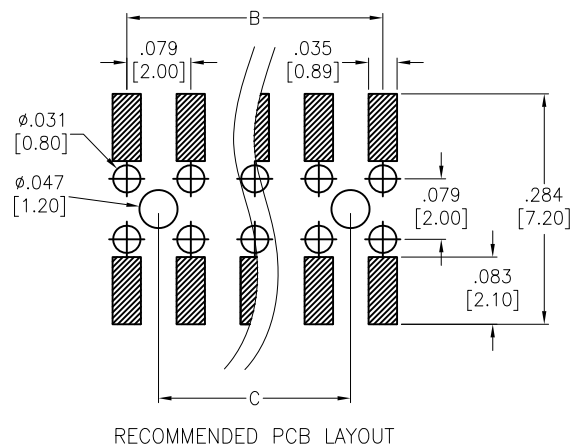


APPROVED: _____

DATE: _____ TITLE: _____

Rev	AWO #	Description	Date	Appr
-		RELEASED	3/19/18	
A		UPDATE LAYOUT	1/23/19	AY/YC
B		UPDATE DIM.	6/18/19	AY/YC

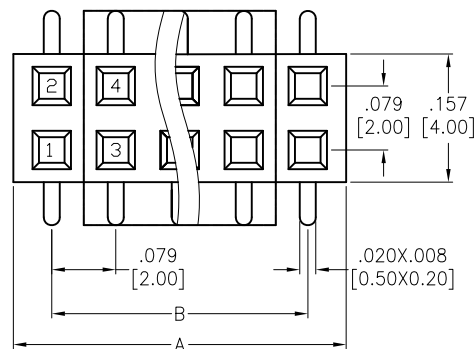

SPECIFICATIONS:

Material:

Insulator: Hi-Temp Thermoplastic, rated UL 94V-0

Insulator color: Black

Contacts: Phosphor Bronze

Plating:

Gold flash over Nickel underplate overall

Electrical:

Current rating: 2 Amp.

Contact resistance: 20 mohms max.

Insulation resistance: 1,000 Mohms min

Dielectric withstanding voltage: 500 VAC

Temperature Rating:

-40°C to +105°C

Environmental:

Lead free, RoHS compliant



PACKAGED ON TAPE & REEL

Positions: 04 thru 80

A = .079 [2.00] x No. of Positions per Row +.020 [0.50]

B = .079 [2.00] x No. of Spaces

B = .079 [2.00] x No. of Spaces - .079 [2.00]

UNLESS OTHERWISE SPECIFIED
ALL DIMENSIONS ARE INCHES [MM]
TOLERANCES: EXCEPT AS NOTED
INCHES HOLES

.X ± .10 Ø.X ± .10
.XX ± .020 Ø.XX ± .015
.XXX ± .015 Ø.XXX ± .010

APPROVALS DATE

DRAWN HR 3/19/18

CHECKED RT 3/19/18

APPROVED

ADAM
TECH
INTERCONNECTS

909 Rahway Avenue,
Union, NJ 07083
Phone: 908-687-5000
Fax: 908-687-5710

TITLE .079 x .079 DUAL ROW RECEPTACLE STRIP
.173 [4.40] HEIGHT, GOLD PLATED

SIZE X PART NO. 2RS2Y-XX-G-SMT-P-PP-T/R REV. B

REF: S00111C SCALE: NTS SHEET 1 OF 1