

6

5

4

3

2

1

APPROVED: _____

DATE: _____ TITLE: _____

Rev

AWO #

Description



Date

Appr



-

RELEASED

2/24/21

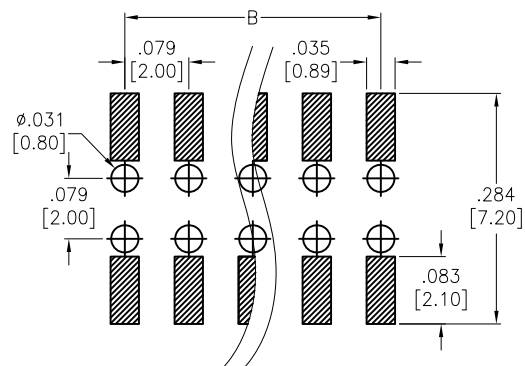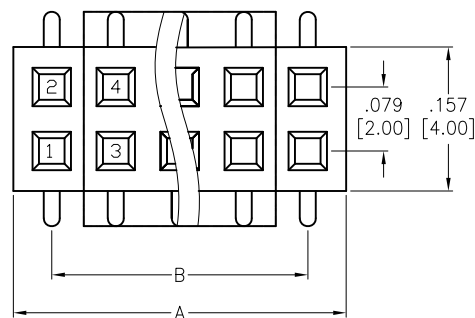

RECOMMENDED PCB LAYOUT

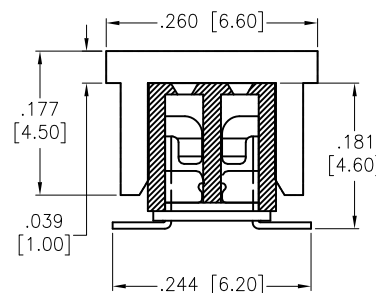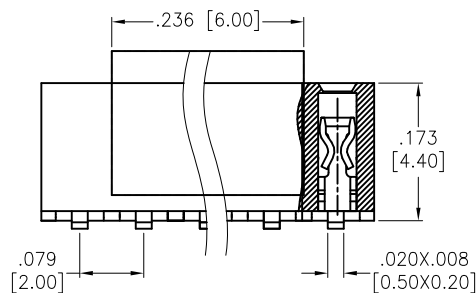

SPECIFICATIONS:

Material:

Insulator: Hi-Temp Thermoplastic, rated UL 94V-0

Insulator color: Black

Contacts: Phosphor Bronze

Plating:

Gold flash over Nickel underplate overall

Electrical:

Current rating: 2 Amp.

Contact resistance: 20 mohms max.

Insulation resistance: 1,000 Mohms min

Dielectric withstanding voltage: 500 VAC

Temperature Rating:

-40°C to +105°C

Environmental:

Lead free, RoHS compliant



Positions: 04 thru 80

A = .079 [2.00] x No. of Positions per Row +.020 [0.50]

B = .079 [2.00] x No. of Spaces

UNLESS OTHERWISE SPECIFIED
ALL DIMENSIONS ARE INCHES [MM]
TOLERANCES: EXCEPT AS NOTED
INCHES HOLES

.X	± .10	Ø.X	± .10
.XX	± .020	Ø.XX	± .015
.XXX	± .015	Ø.XXX	± .010

APPROVALS

DATE

DRAWN

LH

2/24/21

CHECKED

LW

2/24/21

APPROVED

ADAM
TECH

909 Rahway Avenue,
Union, NJ 07083
Phone: 908-687-5000
Fax: 908-687-5710

TITLE .079 x .079 DUAL ROW RECEPTACLE STRIP
.173 [4.40] HEIGHT, GOLD PLATED

SIZE

X

PART NO.

2RS2Y-XX-G-SMT-PP

REV.

-

REF:

S00111C

SCALE: NTS

SHEET 1 OF 1

6

5

4

3

2

1