
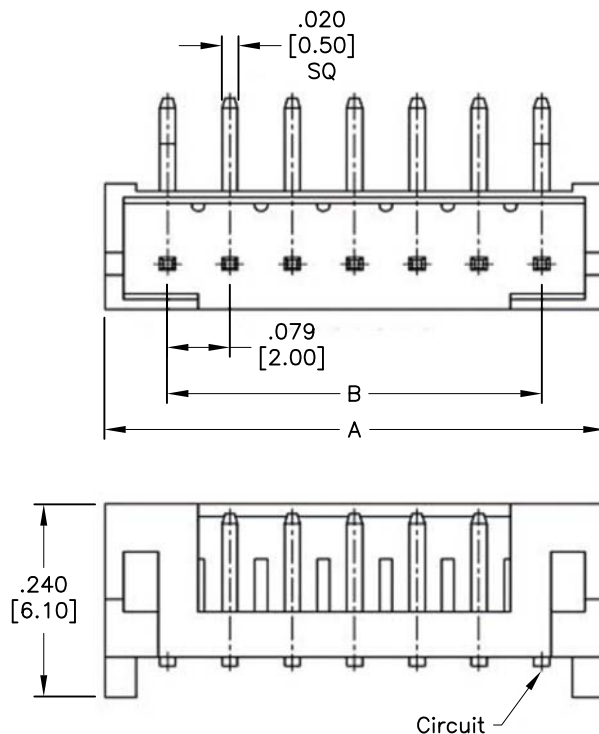



APPROVED: _____

DATE: _____ TITLE: _____

Rev	AWO #	Description	Date	Appr
-		RELEASED	4/6/05	
A		REDRAWN	4/13/09	
B		REVISED DIM.	9/13/11	
C		UPDATE DRAWING	10/8/19	LH/JC



RECOMMENDED PCB LAYOUT

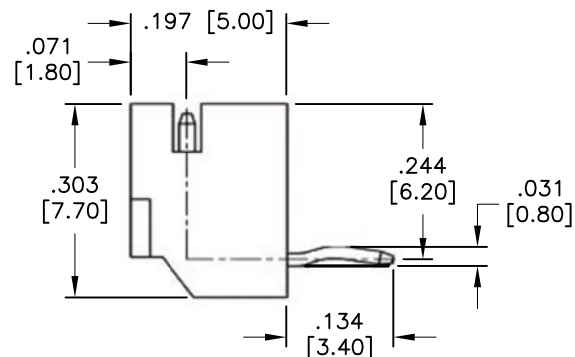

SPECIFICATIONS:

Material:

Insulator: Nylon 66, rated UL 94V-0

Insulator color: Brown

Contacts: Brass

Plating:

Tin over Copper underplate overall

Electrical:

Voltage rating: 300 V AC/DC

Current rating: 3 A AC/DC

Contact resistance: 20 mohms max

Insulation resistance: 100 Mohms min

Dielectric withstanding voltage: 1,000 VAC for 1 minute

Temperature Rating:

-25°C to +85°C

Environmental:

Lead free, RoHS compliant



Positions: 2 thru 15

A = .079 [2.00] x No. of Positions + .079 [2.00]

B = .079 [2.00] x No. of Spaces

UNLESS OTHERWISE SPECIFIED
ALL DIMENSIONS ARE INCHES [MM]
TOLERANCES: EXCEPT AS NOTED
INCHES HOLES

.X	± .10	Ø.X	± .10
.XX	± .020	Ø.XX	± .015
.XXX	± .015	Ø.XXX	± .010

APPROVALS		DATE
DRAWN	SS	4/6/05
CHECKED		
APPROVED		

ADAM
TECH
INTERCONNECTS

909 Rahway Avenue,
Union, NJ 07083
Phone: 908-687-5000
Fax: 908-687-5710

TITLE
.079 [2.00] SHROUDED HEADER
RIGHT ANGLE, PCB

SIZE X	PART NO. 2SH-B-XX-TR	REV. C
-----------	-------------------------	-----------

REF: S00099T	SCALE: NTS	SHEET 1 OF 1
--------------	------------	--------------