

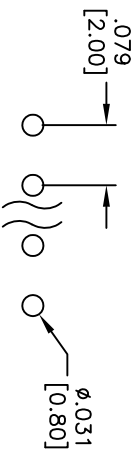
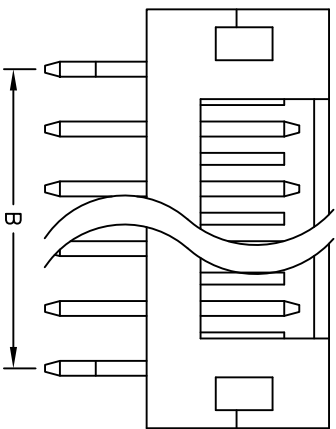


APPROVED: _____
DATE: _____ TITLE: _____

Rev	AWO #	Description	Date	Appr
-		RELEASED	4/6/05	
A		REDRAWN	4/13/09	

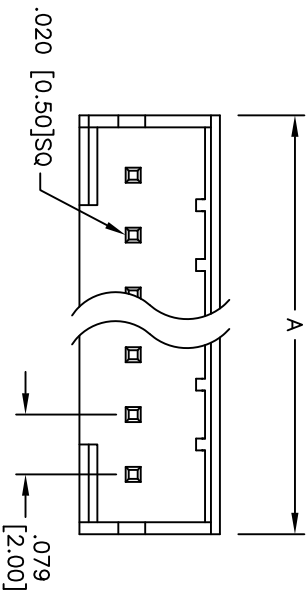

RECOMMENDED PCB LAYOUT

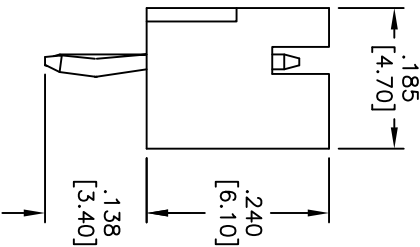

SPECIFICATIONS:

Material:

Insulator: Nylon 66, rated UL 94V-0

Insulator color: Brown

Contacts: Brass

Plating:

Tin over Copper underplate overall

Electrical:

Operating voltage: 100 VAC max

Current rating: 1 Amp max

Contact resistance: 20 mohms max

Insulation resistance: 1,000 Mohms min @ 500 VDC

Dielectric withstanding voltage: 800 VAC for 1 minute

Temperature Rating:

Operating temperature: -25°C to +85°C

Environmental:

Lead free, RoHS compliant



Positions: 2 thru 15
A = .079 [2.00] x No. of Positions + .079 [2.00]
B = .079 [2.00] x No. of Spaces

UNLESS OTHERWISE SPECIFIED ALL DIMENSIONS ARE INCHES [MM] TOLERANCES: EXCEPT AS NOTED				ADAM TECH 909 Rahway Avenue, Union, NJ 07083 Phone: 908-687-5000 Fax: 908-687-5710			
INCHES	HOLES			TITLE			
.X ± .10	ØXX ± .10			.079 [2.00] SHROUNDED HEADER			
.XX ± .020	ØXXX ± .015			STRAIGHT, PCB			
.XXX ± .015	ØXXX ± .010						
APPROVALS	DATE						
DRAWN	SS	4/6/05		SIZE	PART NO.	REV.	
CHECKED				X	2SH-B-XX-TS	A	
APPROVED				REF: S00099T	SCALE: NTS	SHEET 1 OF 1	