

Rev	AWO #	Description	Date	Appr
-		RELEASED	12/6/17	


APPROVED: _____


DATE: _____ TITLE: _____

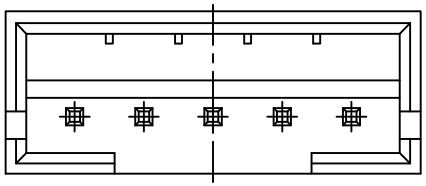



RECOMMENDED PCB LAYOUT

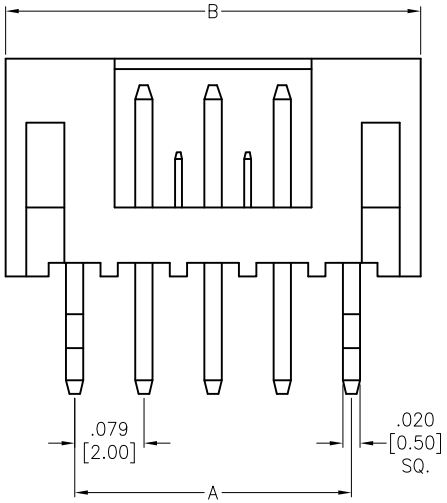

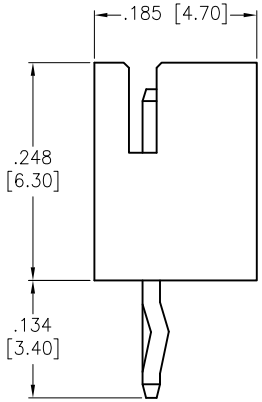

SPECIFICATIONS:
Material:
Insulator: Nylon 66, rated UL94V-0
Insulator color: White
Contacts: Brass
Plating:
Tin over Copper underplate overall
Electrical:
Voltage rating: 100 VAC/DC rms
Current rating: 2A (24AWG)
Contact resistance: 10 mohms max
Insulation resistance: 1,000 Mohms min
Dielectric withstanding voltage: 800 VAC for 1 minute
Mechanical:
Wire range: 30~24 AWG
Temperature Rating:
Operating temperature: -25°C to +85°C
Environmental:
Lead free, RoHS compliant.

RoHS COMPLIANT

Positions: 02 thru 16
A = .079 [2.00] x No. of Spaces
B = .079 [2.00] x No. of Spaces + .161 [4.10]

UNLESS OTHERWISE SPECIFIED
ALL DIMENSIONS ARE INCHES [MM]
TOLERANCES: EXCEPT AS NOTED

INCHES		HOLES	
.X	± .10	Ø.X	±.10
.XX	± .020	Ø.XX	±.015
.XXX	± .015	Ø.XXX	±.010

APPROVALS		DATE
DRAWN	HR	12/6/17
CHECKED	TY	12/6/17
APPROVED		

ADAM TECH
INTERCONNECTS
909 Rahway Avenue,
Union, NJ 07083
Phone: 908-687-5000
Fax: 908-687-5710

TITLE: 2.0mm SHROUDED HEADER, SINGLE ROW, STRAIGHT, TIN PLATED

SIZE	PART NO.	REV.
X	2SH-C4-XX-TS	-

REF:	SCALE:	SHEET
S00111C	NTS	1 OF 1