

6

5

4

3

2

1

APPROVED: _____

DATE: _____ TITLE: _____

Rev

AWO #

Description

Date

Appr

-

RELEASED

1/3/18

D

D

C



C

B



B

A

A

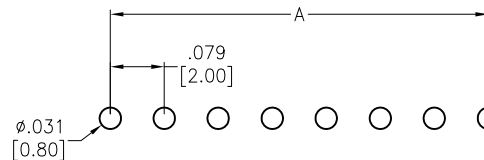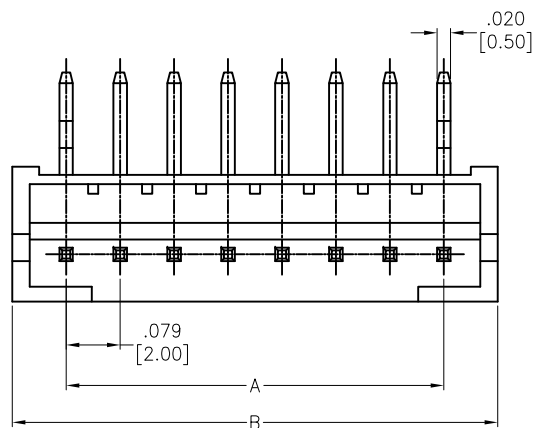

RECOMMENDED PCB LAYOUT

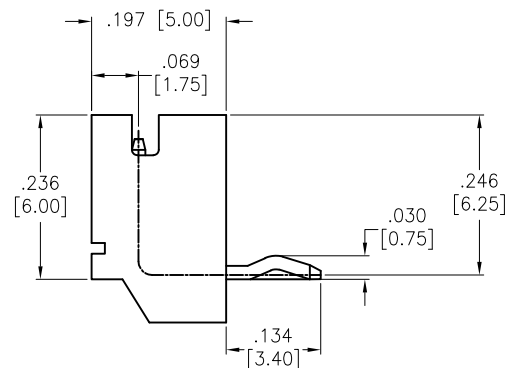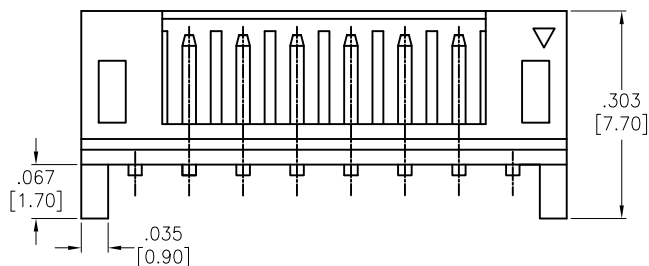

Positions: 02 thru 18

A = .079 [2.00] x No. of Spaces

B = .079 [2.00] x No. of Spaces + .157 [4.00]

SPECIFICATIONS:

Material:

Insulator: Nylon 66, rated UL 94V-0

Insulator color: White

Contacts: Brass

Plating:

Tin over Copper underplate overall

Environmental:

Lead free, RoHS compliant



UNLESS OTHERWISE SPECIFIED
ALL DIMENSIONS ARE INCHES [MM]
TOLERANCES: EXCEPT AS NOTED
INCHES HOLES

.X	± .10	Ø.X	± .10
.XX	± .020	Ø.XX	± .015
.XXX	± .015	Ø.XXX	± .010

APPROVALS

DATE

DRAWN

AY

1/3/18

CHECKED

KC

1/3/18

APPROVED

ADAM
TECH
INTERCONNECTS

909 Rahway Avenue,
Union, NJ 07083
Phone: 908-687-5000
Fax: 908-687-5710

TITLE .079 [2.00] SHROUDED HEADER, RIGHT ANGLE

TIN PLATED, DIP TYPE

SIZE

X

PART NO.

2SH-C5-XX-TR

REV.

-

REF: S00015T

SCALE: NTS

SHEET 1 OF 1

6

5

4

3

2

1