

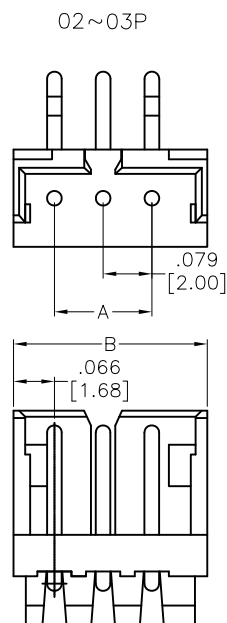



APPROVED: _____

DATE: _____ TITLE: _____

Rev	AWO #	Description	Date	Appr
-		RELEASED	10/24/11	
A		UPDATE DRAWING	1/5/17	AY/AT
B		UPDATE DRAWING	5/15/19	AY/EZ

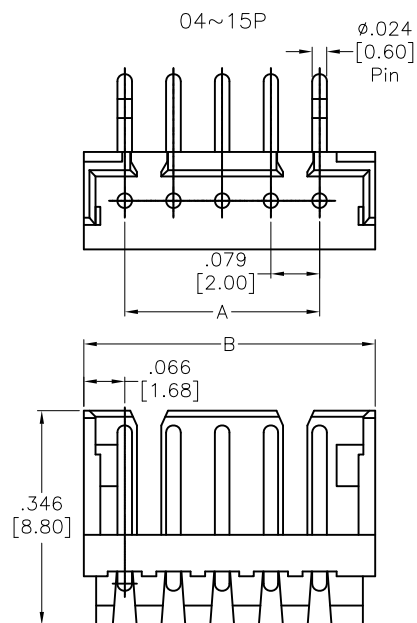

RECOMMENDED P.C.B LAYOUT

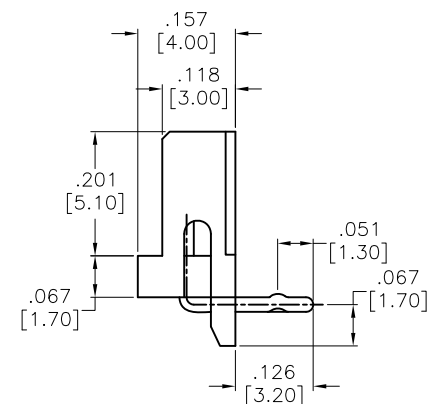

SPECIFICATIONS:

Material:

Insulator: Nylon 66, rated UL 94V-0

Insulator color: White

Contacts: Copper Alloy, Tin plated

Electrical:

Voltage rating: 125 VAC/DC

Current rating: 2A AC/DC

Contact resistance: 10 mohms max

Insulation resistance: 1,000 Mohms min

Dielectric withstanding voltage: 1,000 VAC for 1 minute

Temperature Rating:

-25°C to +85°C

Environmental:

Lead free, RoHS compliant



Positions: 2 thru 15

A = .079 [2.00] x No. of Spaces

B = .079 [2.00] x No. of Positions + .077 [1.96]

UNLESS OTHERWISE SPECIFIED
ALL DIMENSIONS ARE INCHES [MM]
TOLERANCES: EXCEPT AS NOTED

INCHES		HOLES	
.X	± .10	Ø.X	± .10
.XX	± .020	Ø.XX	± .015
.XXX	± .015	Ø.XXX	± .010

APPROVALS

DATE

DRAWN

AY

10/24/11

CHECKED

APPROVED

ADAM
TECH
INTERCONNECTS

909 Rahway Avenue,
Union, NJ 07083
Phone: 908-687-5000
Fax: 908-687-5710

TITLE

.079 [2.00] SHROUDED HEADER
RIGHT ANGLE, PCB

SIZE

X

PART NO.

2SH-D-XX-TR

REV.

B

REF:

S00123T

SCALE:

NTS

SHEET

1 OF 1