



Rev	AWO #	Description	Date	Appr
-		RELEASED	11/5/13	

APPROVED: _____


DATE: _____ TITLE: _____




2P

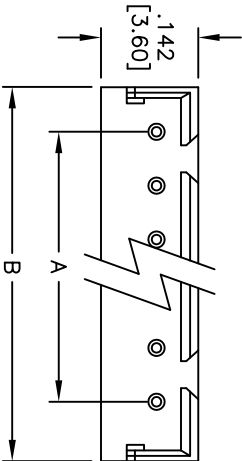



4-15P

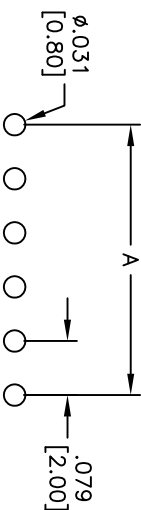

RECOMMENDED PCB LAYOUT



3P

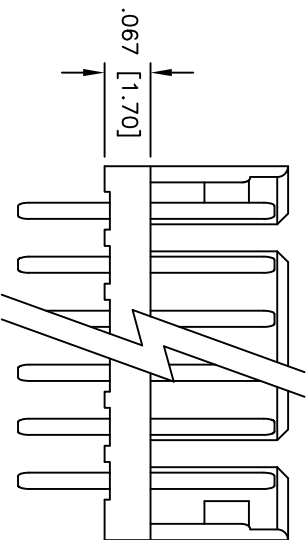

SPECIFICATIONS:

Material:

Insulator: Nylon 66, rated UL 94V-0

Insulator color: White

Contacts: Brass

Plating:

Tin over Copper underplate overall

Electrical:

Voltage rating: 100 VAC, DC

Current rating: 2A AC, DC

Contact resistance: 20 mohms max

Insulation resistance: 1,000 Mohms min

Dielectric withstanding voltage: 800 VAC for 1 minute

Temperature Rating:

Operating temperature: -25°C to +85°C

Environmental:

Lead free, RoHS compliant



Positions: 2 thru 15
A = .079 [2.00] x No. of Spaces
B = .079 [2.00] x No. of Spaces + .152 [3.85]

UNLESS OTHERWISE SPECIFIED ALL DIMENSIONS ARE INCHES [MM] TOLERANCES: EXCEPT AS NOTED				INCHES				Holes			
.X	± .10	ØXX	± .10	.XX	± .020	ØXXX	± .015	.XXX	± .015	ØXXX	± .010
APPROVALS				DATE							
DRAWN	AY			11/5/13				SIZE	PART NO.	REV.	
CHECKED	AL			11/5/13				X	2SH-D-XX-TS-NK	-	
APPROVED								REF:	S00123T	SCALE: NTS	SHEET 1 OF 1

ADAM TECH

909 Rahway Avenue, Union, NJ 07083
Phone: 908-687-5000 Fax: 908-687-5710

.079 [2.00] SHROUNDED HEADER
STRAIGHT, PCB, NO KINK PIN