




APPROVED: _____

DATE: _____ TITLE: _____




Rev	AWO #	Description	Date	Appr
-		RELEASED	12/13/17	
A		UPDATE DRWING	3/31/21	LH/KL

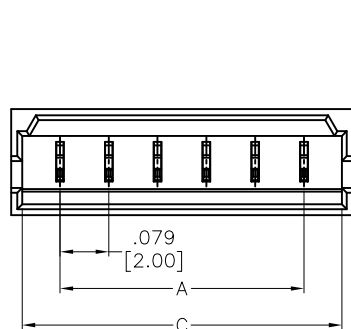


SECTION A-A

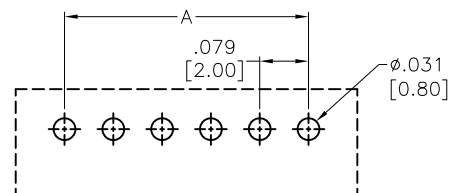

RECOMMENDED PCB LAYOUT

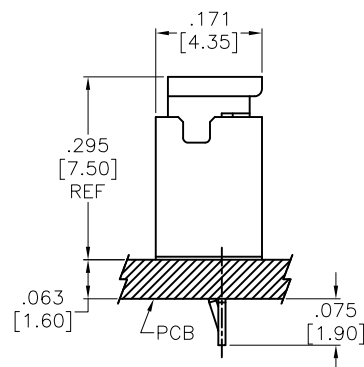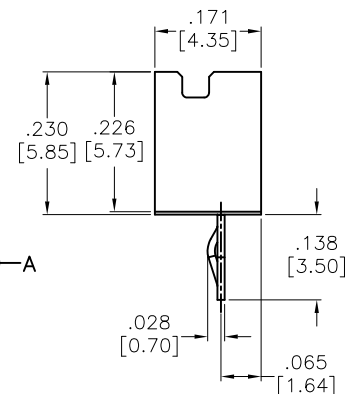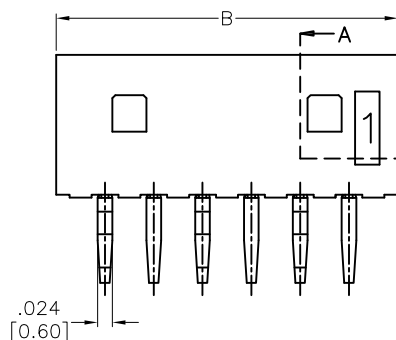

MATED CONDITION

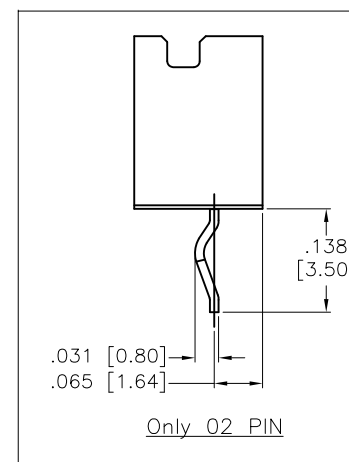

Only 02 PIN

SPECIFICATIONS:

Material:

Insulator: Nylon66, rated UL 94V-0

Insulator color: White

Contacts: Phosphor Bronze

Plating:

Tin over Copper underplate overall

Electrical:

Voltage rating: 125 V AC/DC.

Current rating: 2A AC/DC.

Contact resistance: 20 mohms max.

Insulation resistance: 1000 Mohms min.

Dielectric withstanding voltage: 800 VAC for 1 minute

Temperature Rating:

-25°C to +85°C

Environmental:

Lead free, RoHS compliant



Positions: 02 thru 15

A = .079 [2.00] x No. of Spaces

B = .079 [2.00] x No. of Spaces + .157 [4.00]

C = .079 [2.00] x No. of Spaces + .122 [3.10]

UNLESS OTHERWISE SPECIFIED
ALL DIMENSIONS ARE INCHES [MM]
TOLERANCES: EXCEPT AS NOTED
INCHES HOLES
.X ± .10 Ø.X ± .10
.XX ± .020 Ø.XX ± .015
.XXX ± .015 Ø.XXX ± .010

APPROVALS

DATE

DRAWN	AY	12/13/17
CHECKED	RC1	12/13/17
APPROVED		

ADAM
TECH

909 Rahway Avenue,
Union, NJ 07083
Phone: 908-687-5000
Fax: 908-687-5710

TITLE
.079 [2.00] WAFER, PCB TYPE, STRAIGHT
TIN PLATED, INSULATOR COLOR WHITE

SIZE X	PART NO. 2SH-F-XX-TS-WT	REV. A
REF: S00186T	SCALE: NTS	SHEET 1 OF 1