


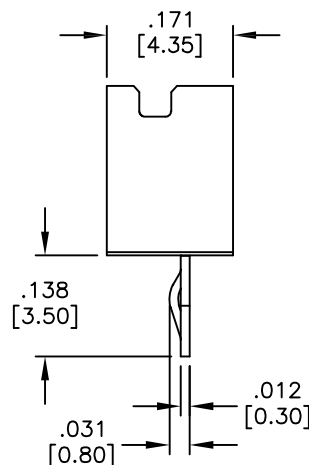
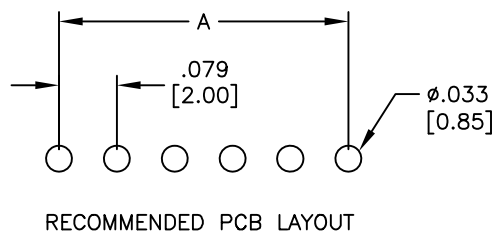


APPROVED: _____
 DATE: _____ TITLE: _____

Rev	AWO #	Description	Date	Appr
-		RELEASED	10/18/17	
A		UPDATE SPEC.	1/15/19	AY/RT
B		ADDED SHAPE	3/11/19	AY/TY

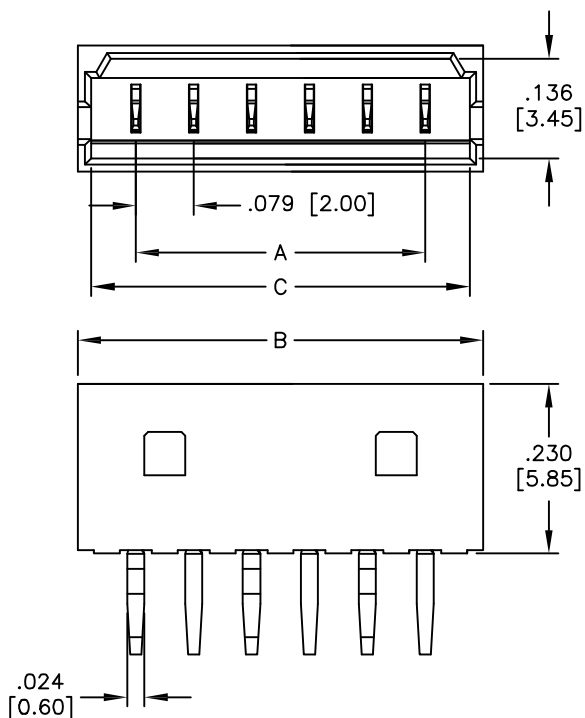

SPECIFICATIONS:

Material:
 Insulator: Nylon 66, rated UL 94V-0
 Insulator color: White
 Contacts: Brass
 Plating:
 Tin over Copper underplate overall
 Electrical:
 Voltage rating: 125 V AC/DC.
 Current rating: 2A AC/DC.
 Contact resistance: 10 mohms max.
 Insulation resistance: 1000 Mohms min.
 Dielectric withstanding voltage: 800 VAC for 1 minute
 Temperature Rating:
 -25°C to +85°C
 Environmental:
 Lead free, RoHS compliant



Positions: 02 thru 15

A = .079 [2.00] x No. of Spaces
 B = .079 [2.00] x No. of Spaces + .157 [4.00]
 C = .079 [2.00] x No. of Spaces + .122 [3.10]

UNLESS OTHERWISE SPECIFIED
 ALL DIMENSIONS ARE INCHES [MM]
 TOLERANCES: EXCEPT AS NOTED
 INCHES HOLES
 .X ± .10 Ø.X ± .10
 .XX ± .020 Ø.XX ± .015
 .XXX ± .015 Ø.XXX ± .010

APPROVALS		DATE
DRAWN	AY	10/18/17
CHECKED	YC	10/18/17
APPROVED		

ADAM
TECH
INTERCONNECTS

909 Rahway Avenue,
 Union, NJ 07083
 Phone: 908-687-5000
 Fax: 908-687-5710

TITLE
 .079 [2.00] WAFER, PCB TYPE, STRAIGHT
 TIN PLATED

SIZE X	PART NO. 2SH-F2-XX-TS	REV. B
REF: S00123T	SCALE: NTS	SHEET 1 OF 1