
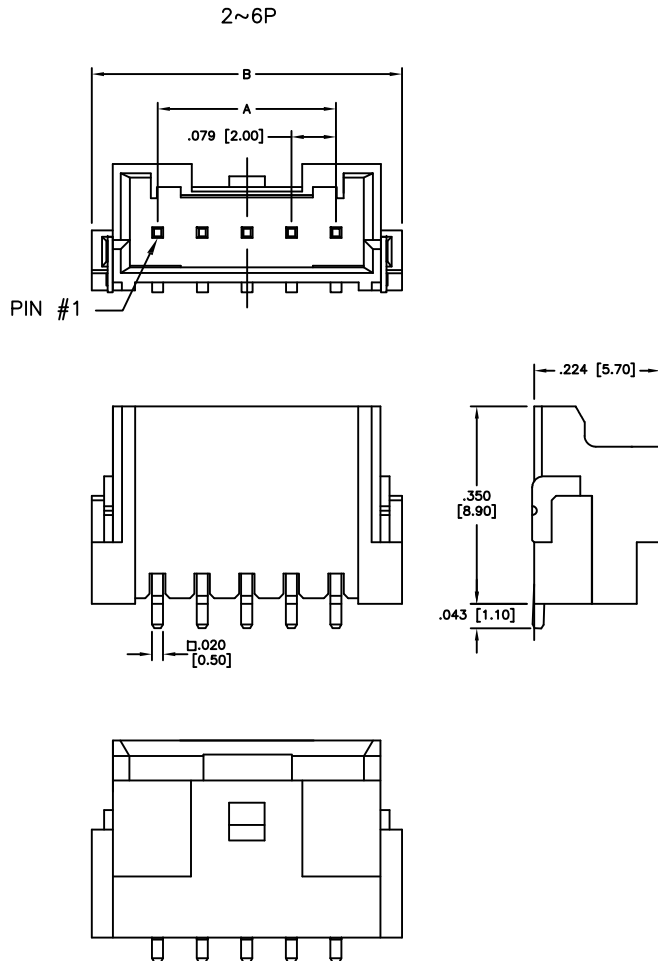
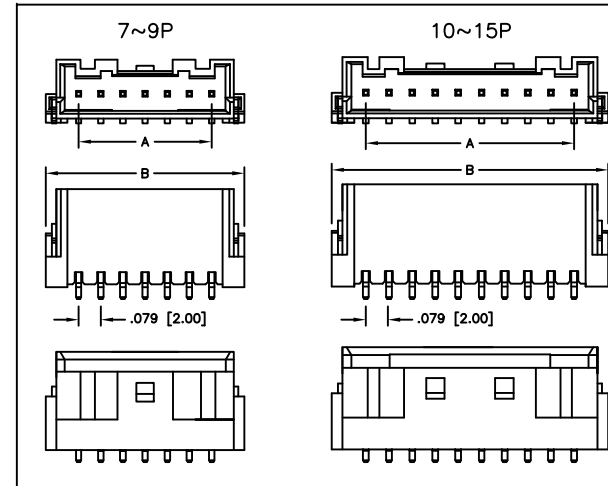


APPROVED: _____

DATE: _____ TITLE: _____

Rev	AWO #	Description	Date	Appr
-		RELEASED	3/21/11	
A		UPDATE DRAWING	7/6/21	LH/TL

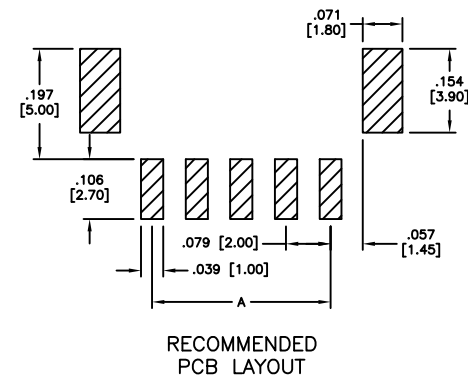

RECOMMENDED
PCB LAYOUT

SPECIFICATIONS:

Material:

Insulator: Hi-temp thermoplastic, rated UL 94V-0

Insulator color: Natural

Contacts: Brass

Plating:

Tin over Copper underplate overall

Electrical:

Voltage rating: 250 AC/DC

Current rating: 3A AC/DC AWG#22

Contact resistance: 20 mohms max

Insulation resistance: 1000 Mohms min

Dielectric withstanding voltage: 800 VAC for 1 minute

Temperature Rating:

Operating temperature: -40°C to +85°C

Environmental:

Lead free, RoHS Compliant



PACKAGED ON TAPE & REEL

Positions: 2 thru 15

A = .079 [2.00] x No. of Spaces

B = .079 [2.00] x No. of Spaces + .236 [6.00]

UNLESS OTHERWISE SPECIFIED ALL DIMENSIONS
ARE INCHES [MM]. TOLERANCES: EXCEPT AS NOTED

INCHES	HOLES
.X ± .10	Ø.X ± .10
.XX ± .020	Ø.XX ± .015
.XXX ± .015	Ø.XXX ± .010

DRAWN	AY	3/21/11
CHECKED	JL	3/21/11
APPROVED		

THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY
AND SHOULD NOT BE USED WITHOUT PRIOR WRITTEN
PERMISSION FROM ADAM TECH

**ADAM
TECH**

909 Rahway Avenue,
Union, NJ 07083
Phone: 908-687-5000
Fax: 908-687-5710

TITLE
.079 [2.00] SHROUDED HEADER
RIGHT ANGLE, SURFACE MOUNT

SIZE X	PART NO. 2SH-H-XX-TR-SMT-T/R	REV. A
REF: S00015T	SCALE: NTS	SHEET 1 OF 1