

Rev	AWO #	Description	Date	Appr
-		RELEASED	5/18/18	


APPROVED: _____

DATE: _____ TITLE: _____

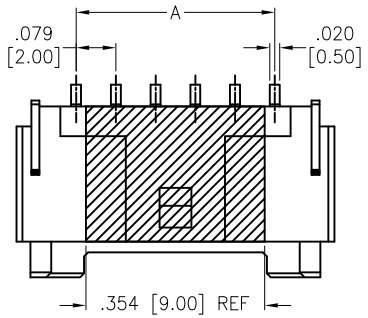





03~04PIN





05~08PIN

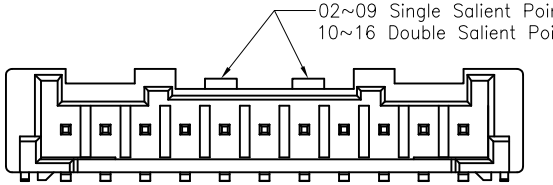

09~16PIN

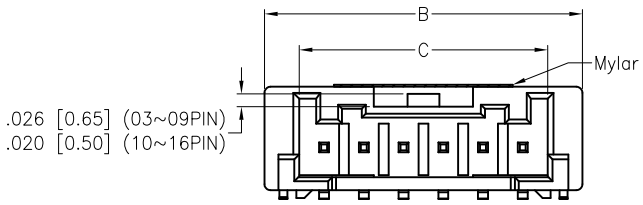

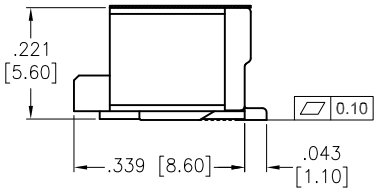

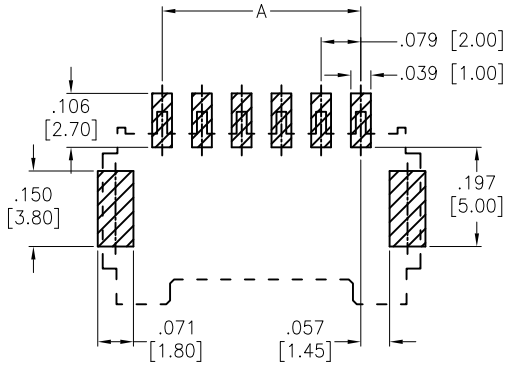

RECOMMENDED PCB LAYOUT

SPECIFICATIONS:
Material:
Insulator: Hi-Temp Thermoplastic, rated UL 94V-0
Insulator color: Natural
Contacts: Brass
Solder Tabs: Brass, Tin plated
Plating:
Tin over Copper underplate overall
Electrical:
Voltage rating: 250 VAC/DC
Current rating: 3 A AC/DC
Contact resistance: 10 mohms max
Insulation resistance: 1,000 Mohms min
Dielectric withstandingvoltage: 800 VAC for 1 minute
Temperature Rating:
-25°C to +85°C
Environmental:
Halogen & Lead free, RoHS compliant

RoHS COMPLIANT

PACKAGED ON TAPE & REEL

Positions: 02 thru 16
A = .079 [2.00] x No. of Spaces
B = .079 [2.00] x No. of Spaces + .236 [6.00]
C = .079 [2.00] x No. of Spaces + .098 [2.50]

UNLESS OTHERWISE SPECIFIED
ALL DIMENSIONS ARE INCHES [MM]
TOLERANCES: EXCEPT AS NOTED

INCHES		HOLES	
.X	± .10	Ø.X	±.10
.XX	± .020	Ø.XX	±.015
.XXX	± .015	Ø.XXX	±.010

APPROVALS		DATE
DRAWN	HR	5/18/18
CHECKED	OC	5/18/18
APPROVED		

ADAM TECH INTERCONNECTS
909 Rahway Avenue,
Union, NJ 07083
Phone: 908-687-5000
Fax: 908-687-5710

TITLE: .079 [2.00] SHROUDED HEADER, RIGHT ANGLE SURFACE MOUNT TYPE, TIN PLATED

SIZE	PART NO.	REV.
X	2SH-HB-XX-TR-SMT-KT-T/R	-

REF: S00111C | SCALE: NTS | SHEET 1 OF 1