


APPROVED: _____


DATE: _____ TITLE: _____

Rev	AWO #	Description	Date	Appr
-		RELEASED	5/27/20	
A		UPDATE PACKING	7/2/20	OW/NL
B		UPDATE DRAWING	3/18/21	WX/NL
C		UPDATE PACKING	5/28/21	WX/NL







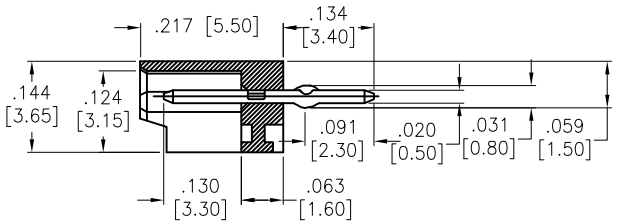




RECOMMENDED PCB LAYOUT






KINK TYPE 1



KINK TYPE 2



SPECIFICATIONS:
Material:
Insulator: Nylon 66, rated UL 94V-0
Insulator color: White
Contacts: Brass
Plating:
Tin over Nickel underplate overall
Electrical:
Operating voltage: 125 AC max
Current rating: 2 Amp max
Contact resistance: 30 mohms max
Insulation resistance: 1,000 Mohms min
Dielectric withstanding voltage: 1,000 VAC for 1 minute
Temperature Rating:
Operating temperature: -25°C to +85°C
Environmental:
Halogen & Lead free, RoHS compliant

RoHS COMPLIANT

PACKAGED ON PLASTIC TUBE

UNLESS OTHERWISE SPECIFIED
ALL DIMENSIONS ARE INCHES [MM]
TOLERANCES: EXCEPT AS NOTED

INCHES		HOLES	
.X	± .10	Ø.X	±.10
.XX	± .020	Ø.XX	±.015
.XXX	± .015	Ø.XXX	±.010

APPROVALS		DATE
DRAWN	LH	5/27/20
CHECKED	NL	5/27/20
APPROVED		

ADAM TECH
909 Rahway Avenue,
Union, NJ 07083
Phone: 908-687-5000
Fax: 908-687-5710

TITLE: .079 [2.00] SHROUDED HEADER STRAIGHT, PCB, TIN PLATED


SIZE	PART NO.	REV.
X	2SH-J-03-TS-PT	C


REF: S00111C | SCALE: NTS | SHEET 1 OF 2

Rev	AWO #	Description	Date	Appr
SEE SHT 1 OF 2 FOR REVISION				

APPROVED: _____

DATE: _____ TITLE: _____

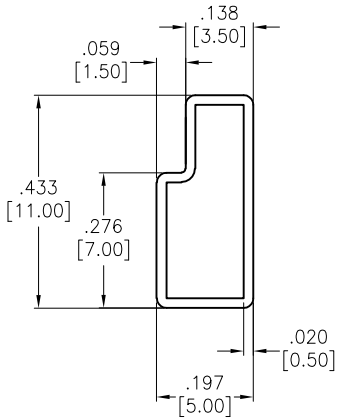

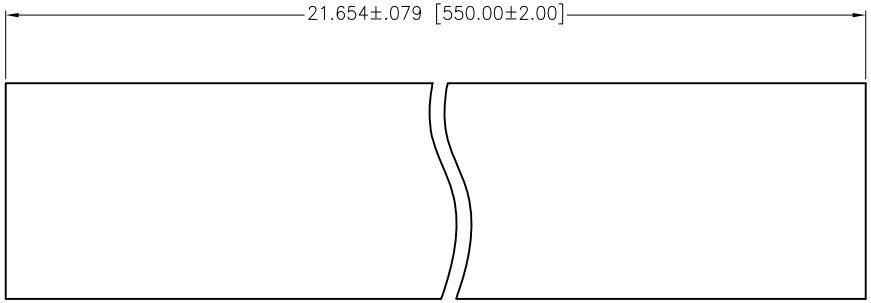

1 TUBE/66 PCS

UNLESS OTHERWISE SPECIFIED
ALL DIMENSIONS ARE INCHES [MM]
TOLERANCES: EXCEPT AS NOTED

INCHES		HOLES	
.X	± .10	Ø.X	±.10
.XX	± .020	Ø.XX	±.015
.XXX	± .015	Ø.XXX	±.010

APPROVALS		DATE
DRAWN	LH	5/27/20
CHECKED	NL	5/27/20
APPROVED		

ADAM TECH
909 Rahway Avenue,
Union, NJ 07083
Phone: 908-687-5000
Fax: 908-687-5710

TITLE
.079 [2.00] SHROUDED HEADER
STRAIGHT, PCB, TIN PLATED

SIZE	PART NO.	REV.
X	2SH-J-03-TS-PT	C

REF:	SCALE:	SHEET
S00111C	NTS	2 OF 2