


APPROVED: _____


DATE: _____ TITLE: _____


Rev	AWO #	Description	Date	Appr
-		RELEASED	8/13/10	
A		UPDATED DRAWING	10/20/16	HR/CH
B		UPDATED DRAWING	3/17/21	WX/NL




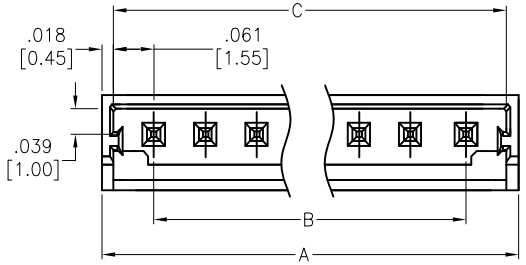

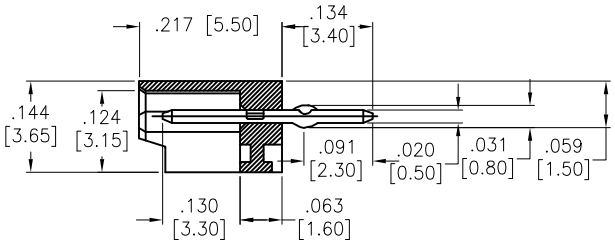


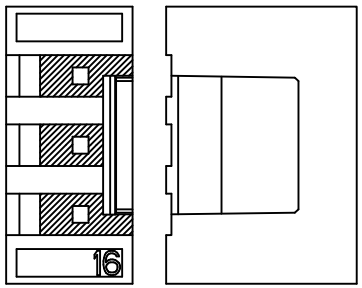




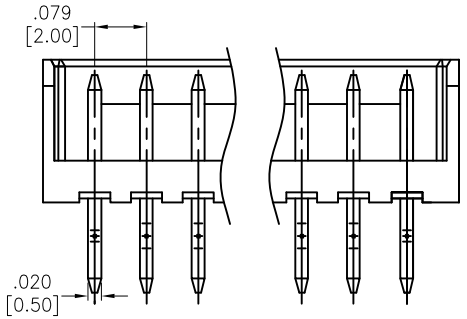


KINK TYPE 1



KINK TYPE 2





RECOMMENDED PCB LAYOUT

SPECIFICATIONS:
Material:
Insulator: Nylon 66, rated UL 94V-0
Insulator color: White
Contacts: Brass
Plating:
Tin over Nickel underplate overall
Electrical:
Operating voltage: 125 AC max
Current rating: 2 Amp max
Contact resistance: 30 mohms max
Insulation resistance: 1,000 Mohms min
Dielectric withstanding voltage: 1,000 VAC for 1 minute
Temperature Rating:
Operating temperature: −25°C to +85°C
Environmental:
Halogen & Lead free, RoHS compliant

RoHS COMPLIANT

A = .079 [2.00] x No. of Contacts + .079 [2.00]
B = .079 [2.00] x No. of Contacts − 0.79 [2.00]
C = .079 [2.00] x No. of Contacts + .043 [1.10]

UNLESS OTHERWISE SPECIFIED
ALL DIMENSIONS ARE INCHES [MM]
TOLERANCES: EXCEPT AS NOTED

INCHES		HOLES	
.X	± .10	Ø.X	±.10
.XX	± .020	Ø.XX	±.015
.XXX	± .015	Ø.XXX	±.010

APPROVALS		DATE
DRAWN	DY	8/13/10
CHECKED		
APPROVED		

ADAM TECH
909 Rahway Avenue,
Union, NJ 07083
Phone: 908-687-5000
Fax: 908-687-5710

TITLE: .079 [2.00] SHROUDED HEADER STRAIGHT, PCB, TIN PLATED

SIZE	PART NO.	REV.
X	2SH-J-XX-TS	B

REF: S00111C | SCALE: NTS | SHEET 1 OF 1