

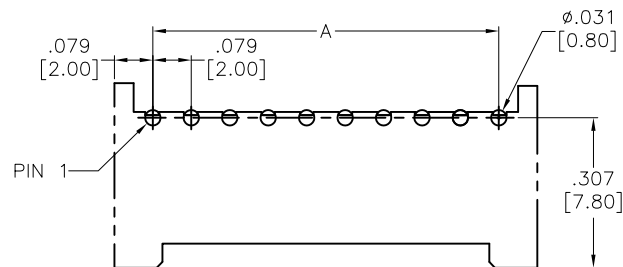



APPROVED: _____
 DATE: _____ TITLE: _____

Rev	AWO #	Description	Date	Appr
-		RELEASED	3/16/18	

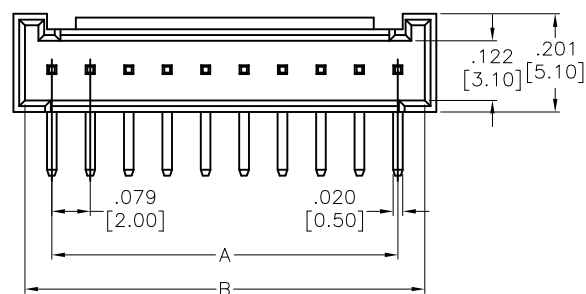

RECOMMENDED PCB LAYOUT

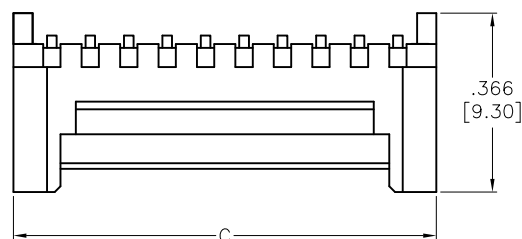

SPECIFICATIONS:

Material:

Insulator: Nylon 66, rated UL 94V-0

Insulator color: Nature

Contacts: Brass

Plating:

Tin over Copper underplate overall

Electrical:

Voltage rating: 250V AC/DC

Current rating: 3A AC/DC

Contact resistance: 20 mohms max

Insulation resistance: 1,000 Mohms min

Dielectric withstanding voltage: 1000 VAC for 1 minute

Temperature Rating:

-25°C to +105°C

Environmental:

Lead free, RoHS compliant



Positions: 2 thru 16

A = .079 [2.00] x No. of Spaces

B = .079 [2.00] x No. of Spaces + .108 [2.75]

C = .079 [2.00] x No. of Spaces + .157 [4.00]

UNLESS OTHERWISE SPECIFIED
 ALL DIMENSIONS ARE INCHES [MM]
 TOLERANCES: EXCEPT AS NOTED

INCHES		HOLES	
.X	± .10	Ø.X	± .10
.XX	± .020	Ø.XX	± .015
.XXX	± .015	Ø.XXX	± .010

APPROVALS		DATE
DRAWN	AY	3/16/18
CHECKED	MY	3/16/18
APPROVED		

ADAM TECH
 INTERCONNECTS
 909 Rahway Avenue,
 Union, NJ 07083
 Phone: 908-687-5000
 Fax: 908-687-5710

TITLE
 .079 [2.00] SHROUDED HEADER
 RIGHT ANGLE, PCB

SIZE	PART NO.	REV.
X	2SH-K1-XX-TR	-

REF: S00124T SCALE: NTS SHEET 1 OF 1