


APPROVED: _____

DATE: _____ TITLE: _____


Rev	AWO #	Description	Date	Appr
-		RELEASED	4/8/19	
A		UPDATE SPEC.	8/24/21	WX/TL

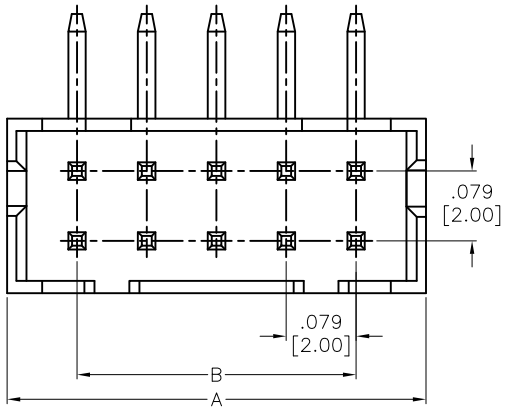

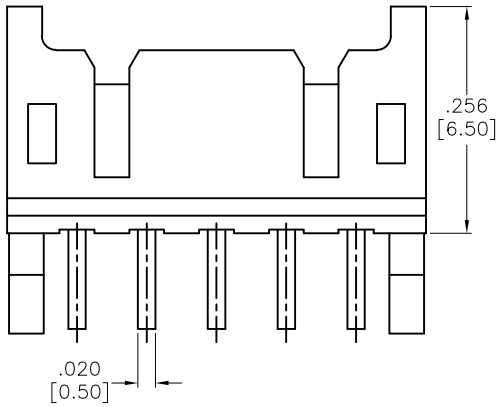

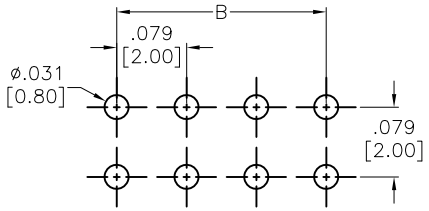

RECOMMENDED P.C.B LAYOUT

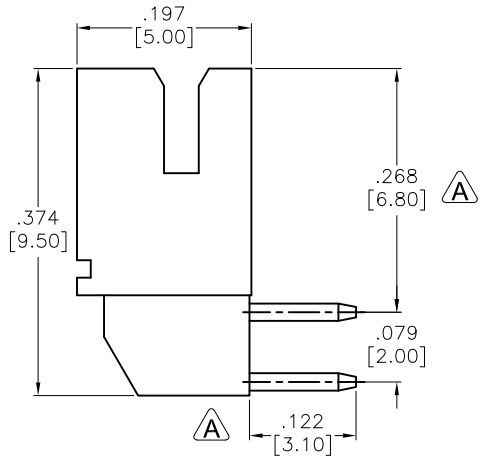

SPECIFICATIONS:

Material:

Insulator: Hi-Temp Thermoplastic, rated UL 94V-0

Insulator color: Natural

Contacts: Brass

Plating:

Gold flash over Nickel underplate overall

Electrical:

Voltage rating: 130 VAC/DC

Current rating: 2A AC/DC (A)

Contact resistance: 20 mohms max

Insulation resistance: 1,000 Mohms min

Dielectric withstanding voltage: 500 VAC for 1 minute

Temperature Rating:

Operating temperature: -25°C to +85°C

Environmental:

Lead free, RoHS compliant RoHS COMPLIANT

Positions: 4 thru 40

A= .079 [2.00] x No. of Positions per Row +.075 [1.90]

B= .079 [2.00] x No. of Space

UNLESS OTHERWISE SPECIFIED ALL DIMENSIONS ARE INCHES [MM]. TOLERANCES: EXCEPT AS NOTED

INCHES		HOLES	
.X	± .10	Ø.X	±.10
.XX	± .020	Ø.XX	±.015
.XXX	± .015	Ø.XXX	±.010

DRAWN	LH	4/8/19
CHECKED	RC1	4/8/19
APPROVED		

THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY AND SHOULD NOT BE USED WITHOUT PRIOR WRITTEN PERMISSION FROM ADAM TECH

ADAM TECH
909 Rahway Avenue,
Union, NJ 07083
Phone: 908-687-5000
Fax: 908-687-5710

TITLE: .079 [2.00] DOUBLE ROW, SHROUDED HEADER RIGHT ANGLE, PCB, GOLD PLATED, HI-TEMP

SIZE	PART NO.	REV.
X	2SHD-C-XX-GR-HT	A

REF: S00015T | SCALE: NTS | SHEET 1 OF 1