

APPROVED: _____


DATE: _____ TITLE: _____


Rev	AWO #	Description	Date	Appr
-		RELEASED	5/7/08	
A		REVISED DIMENSION	8/30/11	
B		UPDATE DRAWING	3/2/22	WX/KL

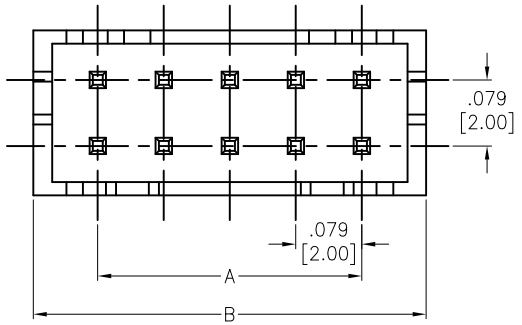



RECOMMENDED PCB LAYOUT

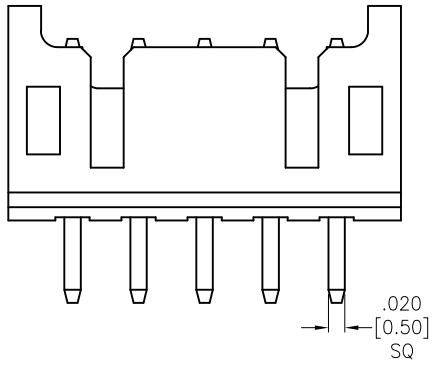

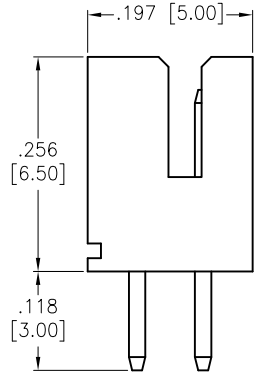

SPECIFICATIONS:

Material:

Insulator: Nylon 66, glass filled, rated UL 94V-0

Insulator color: Natural

Contacts: Brass

Plating:

Gold flash over Nickel underplate overall

Electrical:

Voltage rating: 130V AC/DC

Current rating: 2A AC/DC

Contact resistance: 20 mohms max

Insulation resistance: 1,000 Mohms min

Dielectric withstanding voltage: 500 VAC for 1 minute

Temperature Rating:

-40°C to +105°C

Environmental:

Lead free, RoHS compliant. RoHS COMPLIANT

Positions: 4 thru 34, 40

A = .079 [2.00] x No. of Spaces

B = .079 [2.00] x No. of Spaces +.154 [3.90]

UNLESS OTHERWISE SPECIFIED ALL DIMENSIONS ARE INCHES [MM]. TOLERANCES: EXCEPT AS NOTED

INCHES		HOLES	
.X	± .10	Ø.X	±.10
.XX	± .020	Ø.XX	±.015
.XXX	± .015	Ø.XXX	±.010

DRAWN	SS	5/7/08
CHECKED		
APPROVED		

THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY AND SHOULD NOT BE USED WITHOUT PRIOR WRITTEN PERMISSION FROM ADAM TECH

ADAM TECH
909 Rahway Avenue,
Union, NJ 07083
Phone: 908-687-5000
Fax: 908-687-5710

TITLE: .079 [2.00] DOUBLE ROW, SHROUDED HEADER, STRAIGHT, PCB

SIZE	PART NO.	REV.
X	2SHD-C-XX-GS	B

REF: | SCALE: NTS | SHEET 1 OF 1