


Rev	AWO #	Description	Date	Appr
-		RELEASED	11/25/21	
A		UPDATE SPEC.	12/3/21	LH

APPROVED: _____


DATE: _____ TITLE: _____

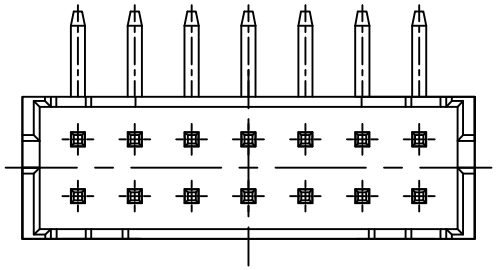

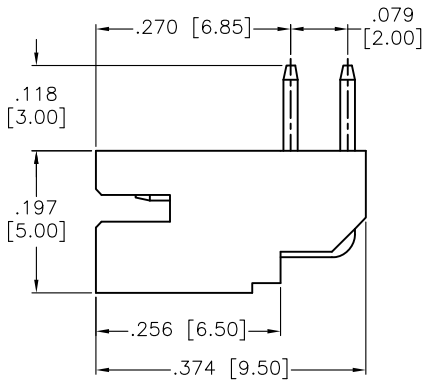


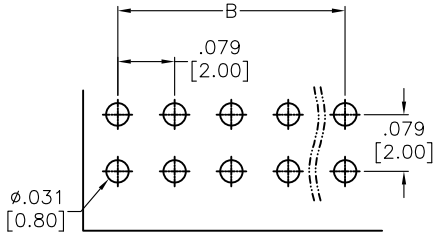


RECOMMENDED PCB LAYOUT

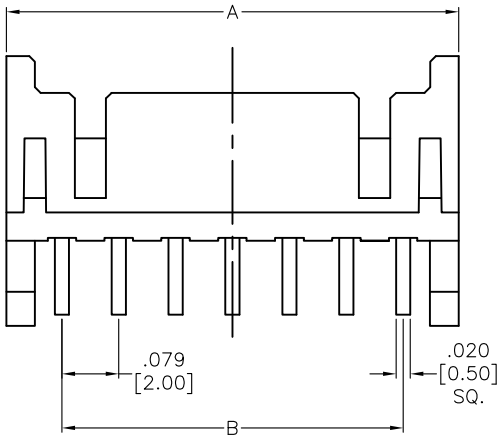

08P~40P



06P



04P

SPECIFICATIONS:
Material:
Insulator: Hi-Temp Thermoplastic, rated UL 94V-0 ⚠
Insulator color: Beige
Contacts: Brass
Plating:
Tin over copper underplate overall
Electrical:
Voltage rating: 250 VAC/DC (rms)
Current rating: 3A
Contact resistance: 10 mohms max.
Insulation resistance: 1,000 Mohms min.
Dielectric withstanding voltage: 800 VAC for 1 minute
Mechanical:
Wire range: 28~22 AWG
Temperature Rating:
Operating temperature: -25°C to +85°C
Environmental:
Lead free, RoHS compliant.

RoHS COMPLIANT

Positions: 08 thru 40
A = .079 [2.00] x No. of Positions + .075 [1.90]
B = .079 [2.00] x No. of Spaces

UNLESS OTHERWISE SPECIFIED ALL DIMENSIONS ARE INCHES [MM]. TOLERANCES: EXCEPT AS NOTED

INCHES		HOLES	
.X	± .10	Ø.X	±.10
.XX	± .020	Ø.XX	±.015
.XXX	± .015	Ø.XXX	±.010

DRAWN	LH	11/25/21
CHECKED	TL	11/25/21
APPROVED		

THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY AND SHOULD NOT BE USED WITHOUT PRIOR WRITTEN PERMISSION FROM ADAM TECH

ADAM TECH
909 Rahway Avenue,
Union, NJ 07083
Phone: 908-687-5000
Fax: 908-687-5710

TITLE: .079 [2.00] DOUBLE ROW, SHROUDED HEADER, RIGHT ANGLE, PCB, TIN PLATED

SIZE	PART NO.	REV.
X	2SHD-C3-XX-TR	A

REF: S00111C | SCALE: NTS | SHEET 1 OF 1