

| Rev | AWO # | Description | Date | Appr |
|---|---|---|---|---|
| - | | RELEASED | 11/26/14 | |
| A | | UPDATE DIM. | 1/18/22 | LH/TL |


APPROVED: _____

DATE: _____ TITLE: _____

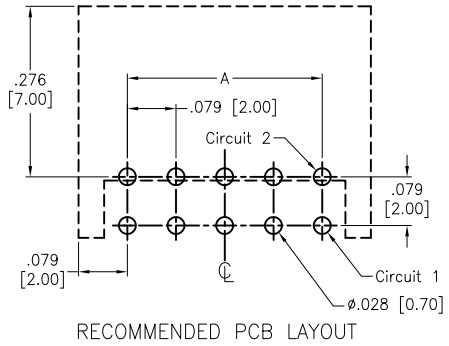



RECOMMENDED PCB LAYOUT

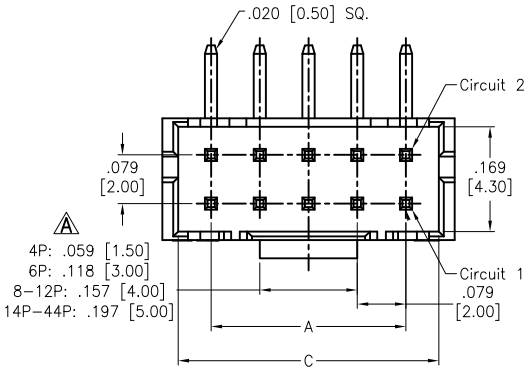


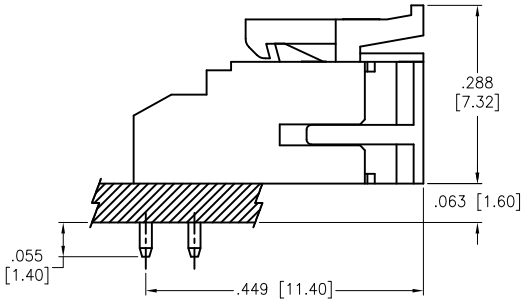

ASSEMBLY VIEW



04P-08P

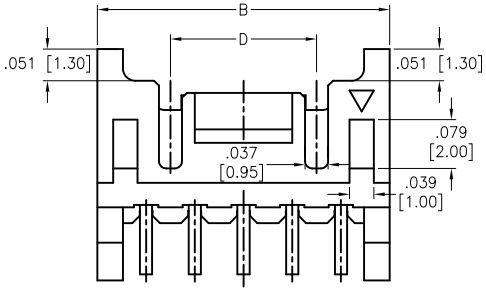


10P-44P

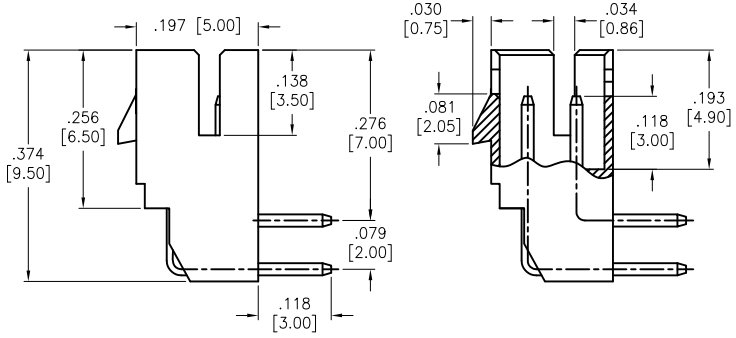


SPECIFICATIONS:
Material:
Insulator: Nylon66, rated UL 94V-0
Insulator color: White
Contacts: Brass
Plating:
Tin over Copper underplate overall
Electrical:
Voltage rating: 250 VAC/DC
Current rating: AC/DC 3 A
Contact resistance: 10 mohms max
Insulation resistance: 1,000 Mohms min
Dielectric withstanding voltage: 800 VAC for 1 minute
Temperature Rating:
Operating temperature: -25°C to +85°C
Environmental:
Lead free, RoHS compliant

RoHS COMPLIANT

Positions: 04 thru 44
A = .079 [2.00] x No. of Spaces
B = .079 [2.00] x No. of Spaces + .157 [4.00]
C = .079 [2.00] x No. of Spaces + .106 [2.70]
D = .079 [2.00] x No. of Spaces - .079 [2.00] (10P-44P)

UNLESS OTHERWISE SPECIFIED ALL DIMENSIONS ARE INCHES [MM]. TOLERANCES: EXCEPT AS NOTED

| INCHES | | HOLES | |
|---|---|---|---|
| .X | ± .10 | Ø.X | ±.10 |
| .XX | ± .020 | Ø.XX | ±.015 |
| .XXX | ± .015 | Ø.XXX | ±.010 |

| | | |
|---|---|---|
| DRAWN | HR | 11/26/14 |
| CHECKED | TW | 11/26/14 |
| APPROVED | | |

THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY AND SHOULD NOT BE USED WITHOUT PRIOR WRITTEN PERMISSION FROM ADAM TECH

ADAM TECH
909 Rahway Avenue,
Union, NJ 07083
Phone: 908-687-5000
Fax: 908-687-5710

TITLE: .079 [2.00] DOUBLE ROW, SHROUDED HEADER, RIGHT ANGLE, PCB

| SIZE | PART NO. | REV. |
|---|---|---|
| X | 2SHD-D-XX-TR | - |

| REF: | SCALE: | SHEET |
|---|---|---|
| S00186T | NTS | 1 OF 1 |