

Rev	AWO #	Description	Date	Appr
-		RELEASED	6/2/17	


APPROVED: _____

DATE: _____ TITLE: _____

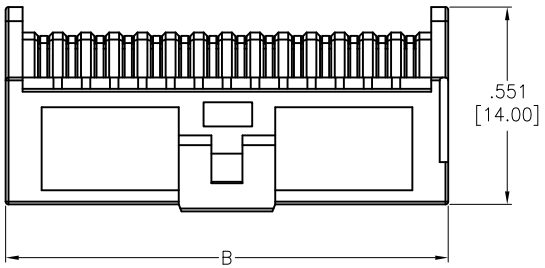


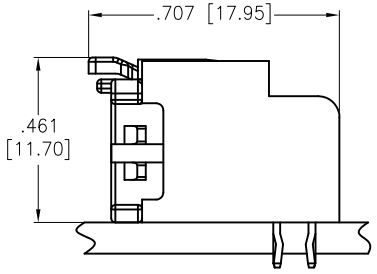


ASSEMBLY VIEW

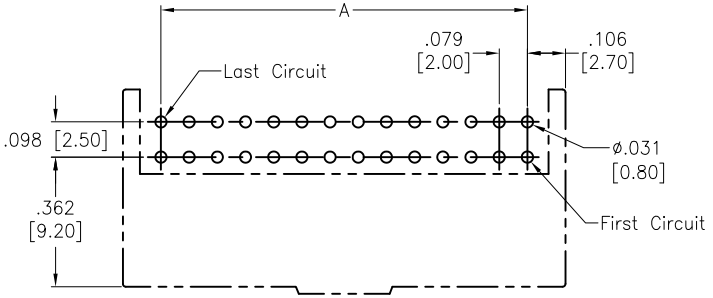

RECOMMENDED PCB LAYOUT

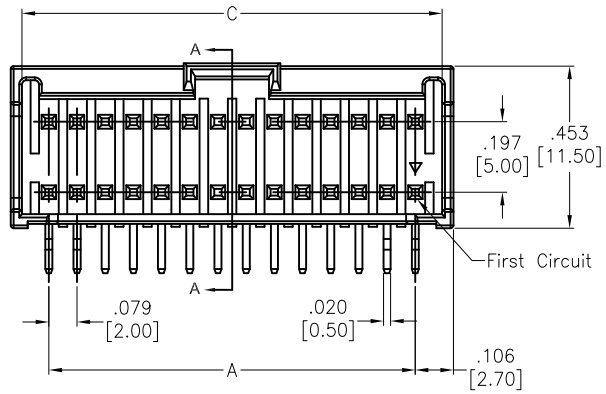

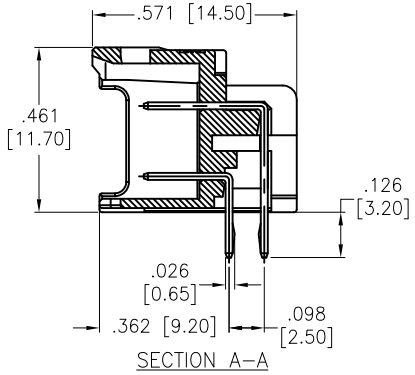

SECTION A–A

SPECIFICATIONS:
Material:
Insulator: PBT, Glass reinforced, rated UL 94V–0
Insulator color: White
Contacts: Brass
Plating:
Tin over Copper underplate overall
Electrical:
Voltage rating: 250 VAC/DC
Current rating: AC/DC 3.0 A (#22AWG)
Contact resistance: 20 mohms max
Insulation resistance: 1,000 Mohms min
Dielectric withstanding voltage: 1,000 VAC for 1 minute
Temperature Rating:
Operating temperature: –25°C to +85°C
Environmental:
Lead free, RoHS compliant

RoHS COMPLIANT

Positions: 8 thru 40
A = .079 [2.00] x No. of Spaces
B = .079 [2.00] x No. of Spaces + .213 [5.40]
C = .079 [2.00] x No. of Spaces + .150 [3.80]

UNLESS OTHERWISE SPECIFIED
ALL DIMENSIONS ARE INCHES [MM]
TOLERANCES: EXCEPT AS NOTED

INCHES		HOLES	
.X	± .10	Ø.X	±.10
.XX	± .020	Ø.XX	±.015
.XXX	± .015	Ø.XXX	±.010

APPROVALS		DATE
DRAWN	AY	6/2/17
CHECKED	MY	6/2/17
APPROVED		

ADAM TECH
909 Rahway Avenue, Union, NJ 07083
Phone: 908-687-5000 Fax: 908-687-5710

TITLE: .079 [2.00] DOUBLE ROW, SHROUDED HEADER, RIGHT ANGLE, PCB

SIZE	PART NO.	REV.
X	2SHD-E-XX-TR	-

REF: S00124T | SCALE: NTS | SHEET 1 OF 1