


APPROVED: _____

DATE: _____ TITLE: _____


Rev	AWO #	Description	Date	Appr
-		RELEASED	12/16/11	
A		ADDED SCHEMATIC	11/16/18	HR/AC1

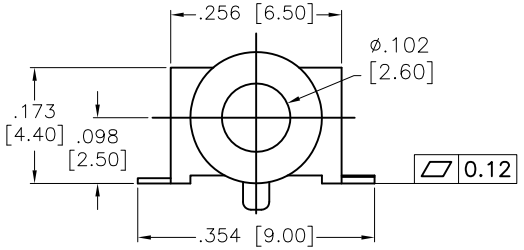

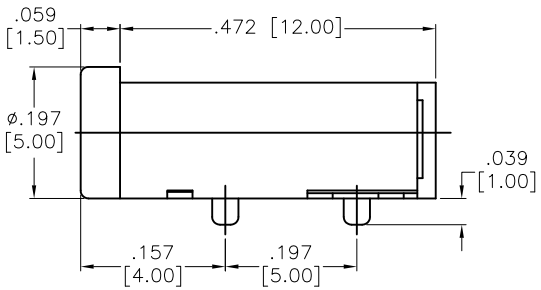




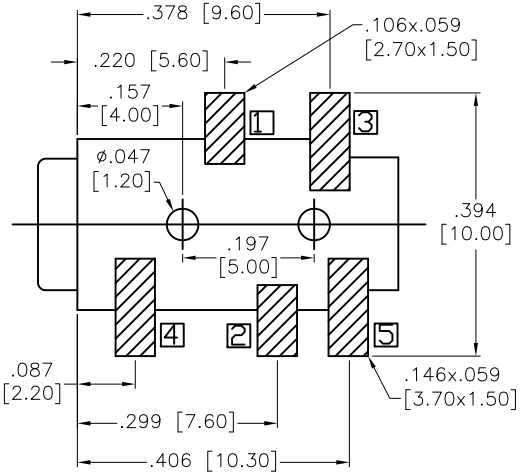


RECOMMENDED PCB LAYOUT

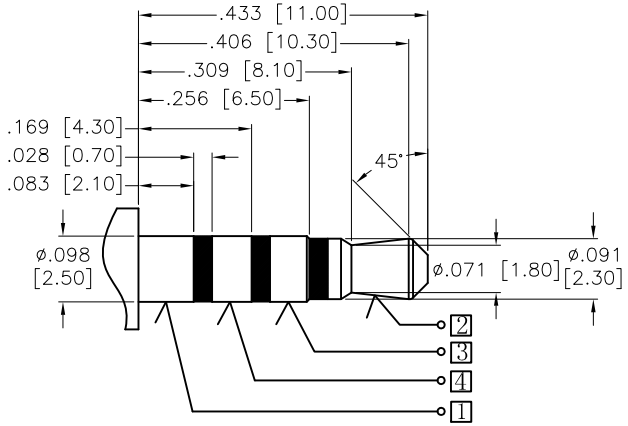

Matching Plug

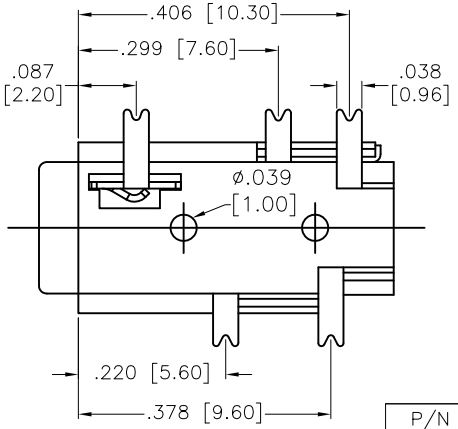

P/N	ASJ-103-J	ASJ-103-M	ASJ-103-D
Schematic code			

SPECIFICATIONS:
Material:
Insulator: Hi-temp thermoplastic, rated UL 94V-0
Insulator color: Black
Spring: Copper Alloy
Contacts: Brass
Plating:
Gold flash over Copper underplate
Electrical:
Rating: 30VDC, 0.5A
Contact resistance: 50 mohms max.
Insulation resistance: 100 Mohms min. @ 500 VDC
Dielectric withstanding voltage: 500 VAC
Temperature Rating:
Operating temperature: -20°C to +70°C
Environmental:
Lead free, RoHS compliant.

RoHS COMPLIANT

UNLESS OTHERWISE SPECIFIED
ALL DIMENSIONS ARE INCHES [MM]
TOLERANCES: EXCEPT AS NOTED

INCHES		HOLES	
.X	± .10	Ø.X	±.10
.XX	± .020	Ø.XX	±.015
.XXX	± .015	Ø.XXX	±.010

APPROVALS		DATE
DRAWN	TW	12/16/11
CHECKED	AY	12/16/11
APPROVED		

ADAM TECH INTERCONNECTS
909 Rahway Avenue,
Union, NJ 07083
Phone: 908-687-5000
Fax: 908-687-5710

TITLE: STEREO PHONE JACK, 2.5mm

SIZE	PART NO.	REV.
X	ASJ-103-X	A

REF: S00002C | SCALE: NTS | SHEET 1 OF 1