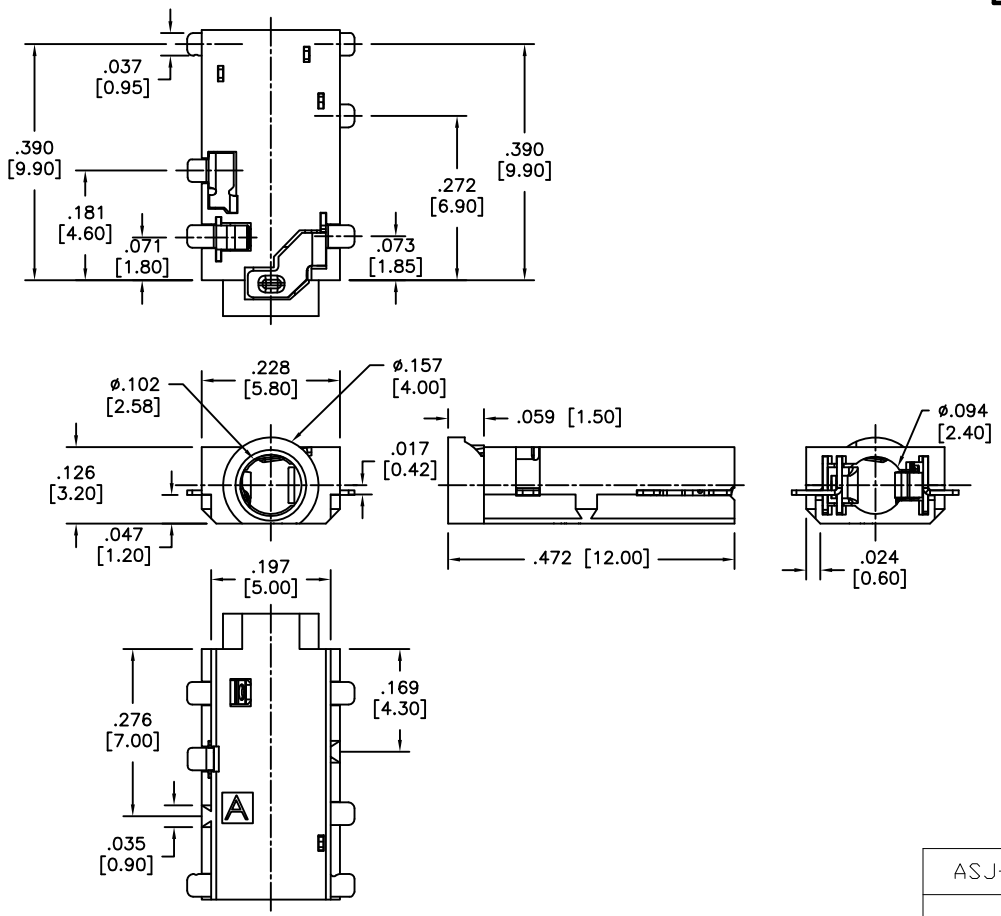
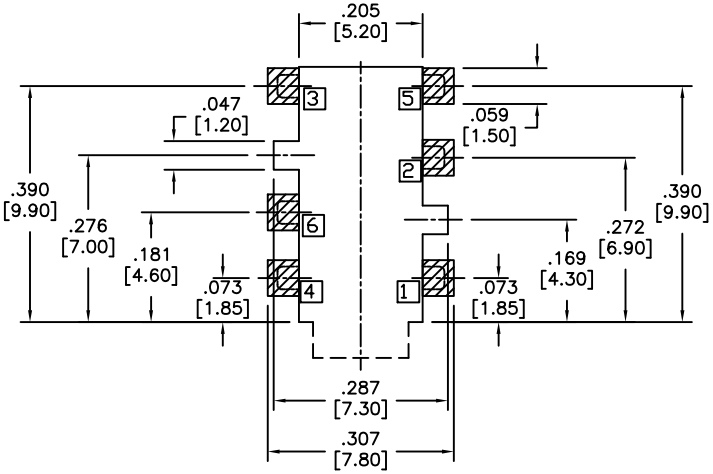
APPROVED: _____






DATE: _____ TITLE: _____

Rev	AWO #	Description	Date	Appr
-		RELEASED	7/30/10	
A		REDRAWN	6/24/11	
B		REVISED TITLE	11/4/11	





Recommended PCB layout

ASJ-105-A	ASJ-105-B	ASJ-105-D	ASJ-105-M	ASJ-105-I
				

SPECIFICATIONS:
Material:
Insulator: Hi-temp thermoplastic, rated UL 94V-0
Insulator color: Black
Contacts: Copper Alloy, Gold Plated
Electrical:
Operating voltage: 30 VDC max.
Current rating: 0.5 Amp max.
Contact resistance: 30 mohms max.
Insulation resistance: 100 Mohms min.
Dielectric withstanding voltage: 500 VAC for 1 minute
Temperature Rating:
Operating temperature: -20°C to +70°C
Environmental:
Lead free, RoHS compliant.

RoHS COMPLIANT

UNLESS OTHERWISE SPECIFIED
ALL DIMENSIONS ARE INCHES [MM]
TOLERANCES: EXCEPT AS NOTED

INCHES		HOLES	
.X	± .10	Ø.X	±.10
.XX	± .020	Ø.XX	±.015
.XXX	± .015	Ø.XXX	±.010

APPROVALS		DATE
DRAWN	DY	7/30/10
CHECKED		
APPROVED		

ADAM TECH
909 Rahway Avenue, Union, NJ 07083
Phone: 908-687-5000 Fax: 908-687-5710

TITLE: STEREO PHONE JACK, 2.50mm

SIZE	PART NO.	REV.
X	ASJ-105-X	B

REF: S00002C | SCALE: NTS | SHEET 1 OF 1