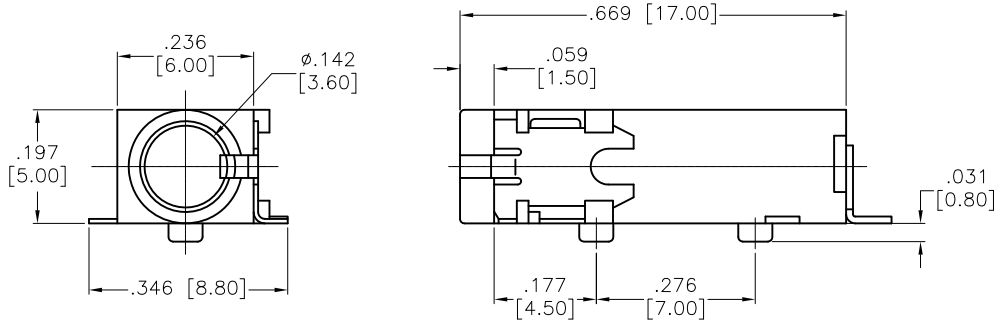
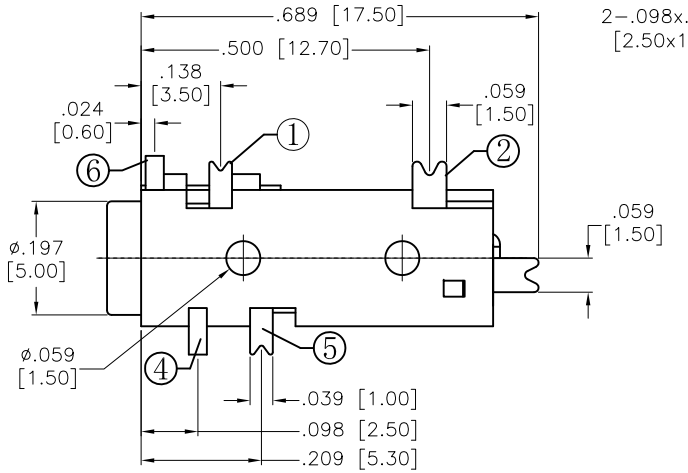
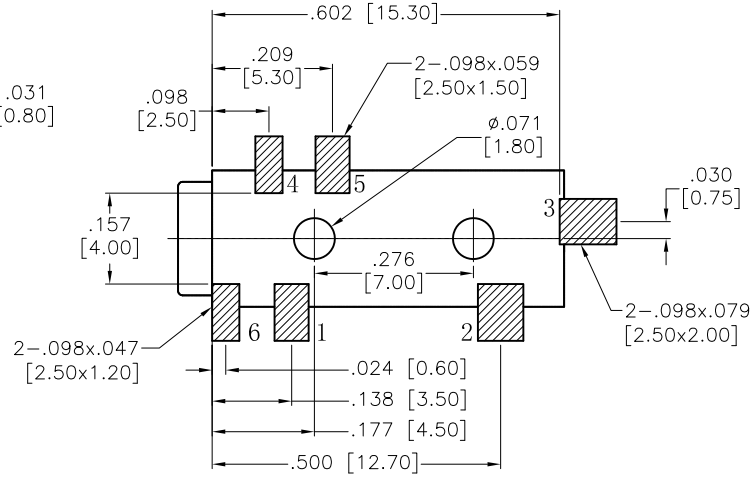
APPROVED: _____

DATE: _____ TITLE: _____

Rev	AWO #	Description	Date	Appr
-		RELEASED	05/07/12	
A		REDRAWN	9/1/16	AY/SL













RECOMMENDED PCB LAYOUT

PACKAGED ON TAPE & REEL

ADAM P/N	ASJ-107B-I-T/R	ASJ-107B-K-T/R	ASJ-107B-J-T/R
SCHEMATIC			
ADAM P/N	ASJ-107B-M-T/R	ASJ-107B-A-T/R	ASJ-107B-D-T/R
SCHEMATIC			

SPECIFICATIONS:
Material:
Insulator: Hi–Temp Thermoplastic, rated UL 94V–0
Insulator color: Black
Contacts: Copper alloy & Stainless steel (Pin1, 5)
Cover: Hi–Temp Thermoplastic, rated UL 94V–0
Plating:
Silver over Nickel underplate overall
Electrical:
Rating: DC 30V 1.0A.
Contact resistance: 30 mohms max.
Insulation resistance: 100 Mohms min.
Dielectric withstanding voltage: 500 VAC
Environmental:
Lead free, RoHS Compliant

RoHS COMPLIANT

UNLESS OTHERWISE SPECIFIED
ALL DIMENSIONS ARE INCHES [MM]
TOLERANCES: EXCEPT AS NOTED

INCHES		HOLES	
.X	± .10	Ø.X	±.10
.XX	± .020	Ø.XX	±.015
.XXX	± .015	Ø.XXX	±.010

APPROVALS		DATE
DRAWN	TW	05/07/12
CHECKED	AY	05/07/12
APPROVED		

ADAM TECH
909 Rahway Avenue, Union, NJ 07083
Phone: 908-687-5000 Fax: 908-687-5710

TITLE
STEREO PHONE JACK, 3.5mm

SIZE	PART NO.	REV.
X	ASJ-107B-X-T/R	A

REF:	SCALE:	SHEET
S00102C	NTS	1 OF 1