


APPROVED: _____


DATE: _____ TITLE: _____

| Rev | AWO # | Description | Date | Appr |
|---|---|---|---|---|
| - | | RELEASED | 3/11/10 | |
| A | | REVISED LAYOUT | 9/13/11 | |
| B | | UPDATED SPEC. | 6/17/16 | HR/LL |

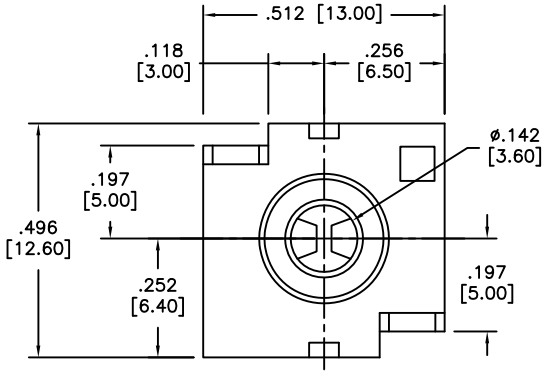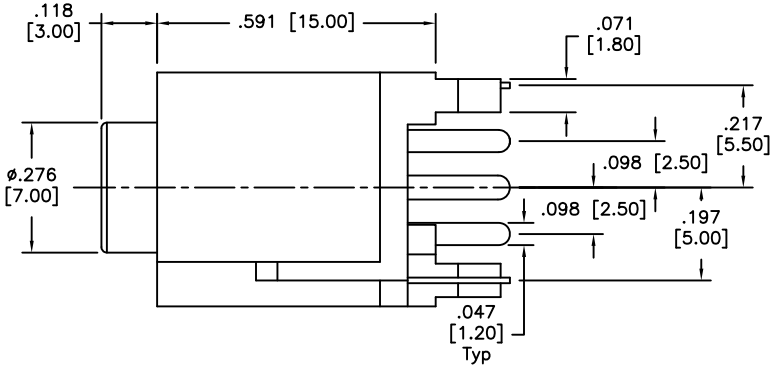



RECOMMENDED PCB LAYOUT
(TOP VIEW)

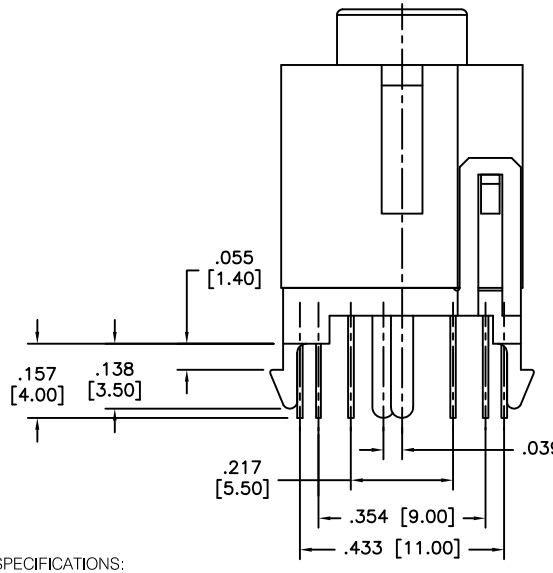

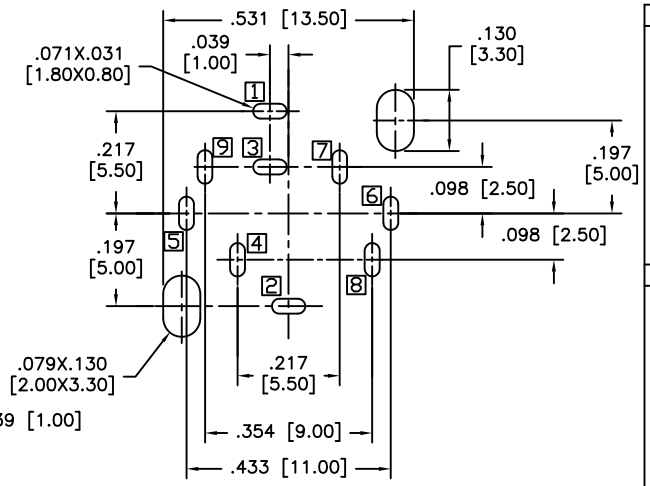
SPECIFICATIONS:
Material:
Insulator: PBT, rated UL 94V-0
Insulator color: Black
Contacts: Copper Alloy
Plating:
Silver over Copper underplate
Electrical:
Voltage rating: 30 VDC
Current rating: 0.5 A
Contact resistance: 50 mohms max.
Insulation resistance: 100 Mohms min. @ 500 VDC
Dielectric withstanding voltage: 500 VAC for 1 minute
Temperature Rating:
Operating temperature: -20°C to +70°C
Environmental:
Lead free, RoHS compliant.

RoHS COMPLIANT

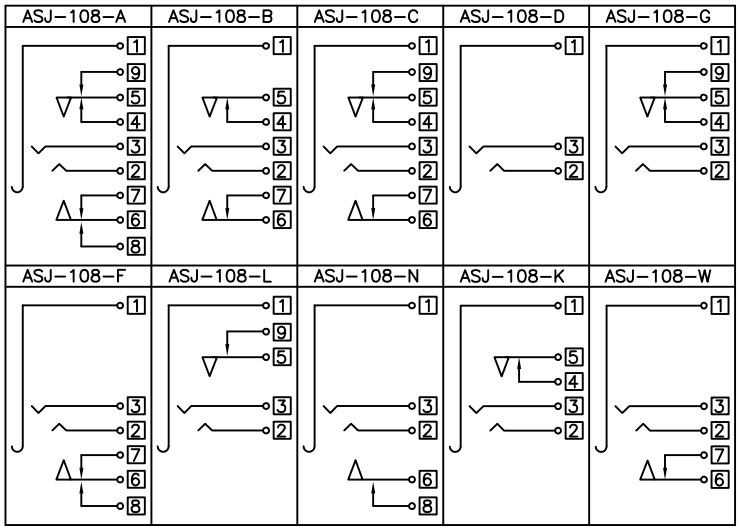UNLESS OTHERWISE SPECIFIED
ALL DIMENSIONS ARE INCHES [MM]
TOLERANCES: EXCEPT AS NOTED

| INCHES | | HOLES | |
|---|---|---|---|
| .X | ± .10 | Ø.X | ±.10 |
| .XX | ± .020 | Ø.XX | ±.015 |
| .XXX | ± .015 | Ø.XXX | ±.010 |

| APPROVALS | | DATE |
|---|---|---|
| DRAWN | DY | 3/11/10 |
| CHECKED | | |
| APPROVED | | |


**ADAM TECH**
909 Rahway Avenue, Union, NJ 07083
Phone: 908-687-5000 Fax: 908-687-5710


TITLE: STEREO PHONE JACK, 3.5mm

| SIZE | PART NO. | REV. |
|---|---|---|
| X | ASJ-108-X | B |

REF: S00002C | SCALE: NTS | SHEET 1 OF 1