

Rev	AWO #	Description	Date	Appr
-		RELEASED	6/17/16	


APPROVED: _____




DATE: _____ TITLE: _____

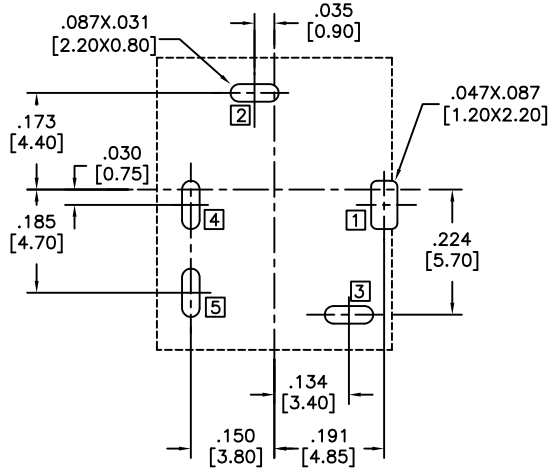

RECOMMENDED PCB LAYOUT
(Copper–sided view)

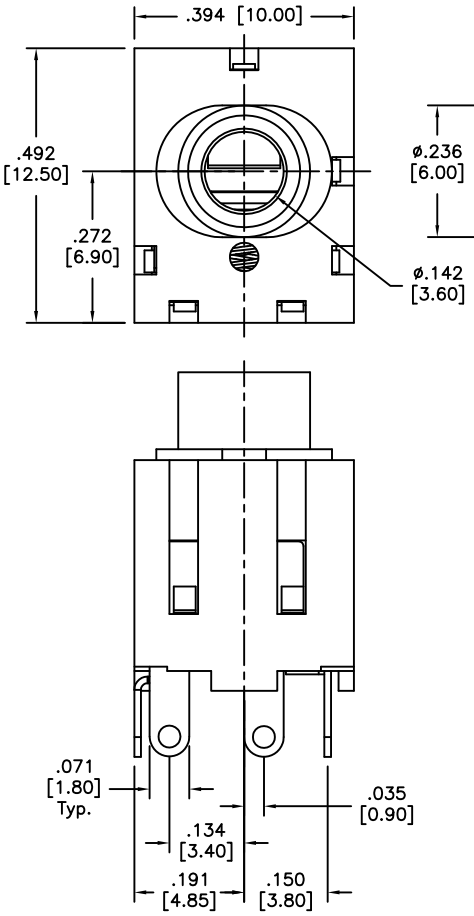

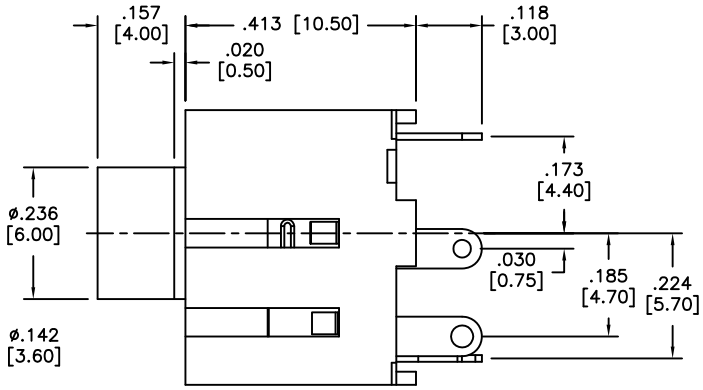

ASJ–109–A–701C	ASJ–109–B–701C	ASJ–109–D–701C
		

SPECIFICATIONS:
Material:
Insulator: PBT, Glass reinforced rated UL 94V–0
Insulator color: Pink (Pantone Color #701C)
Contacts: Copper Alloy
Bushing: Copper Alloy, Nickel plated
Spring: Stainless Steel, Nickel plated
Plating:
Silver over Copper underplate
Electrical:
Voltage rating: 30 VDC.
Current rating: 0.5 Amp max.
Contact resistance: 30 mohms.
Insulation resistance: 100 Mohms min.
Dielectric withstanding voltage: 500 VAC for 1 minute
Temperature Rating:
Operating temperature: –20°C to +70°C
Environmental:
Lead free, RoHS compliant.

RoHS COMPLIANT

UNLESS OTHERWISE SPECIFIED
ALL DIMENSIONS ARE INCHES [MM]
TOLERANCES: EXCEPT AS NOTED

INCHES		HOLES	
.X	± .10	Ø.X	±.10
.XX	± .020	Ø.XX	±.015
.XXX	± .015	Ø.XXX	±.010

APPROVALS		DATE
DRAWN	AY	6/17/16
CHECKED	LL	6/17/16
APPROVED		

ADAM TECH
909 Rahway Avenue, Union, NJ 07083
Phone: 908-687-5000 Fax: 908-687-5710

TITLE
STEREO PHONE JACK, 3.5mm

SIZE	PART NO.	REV.
X	ASJ-109-X-701C	-

REF:	SCALE:	SHEET
S00002C	NTS	1 OF 1