
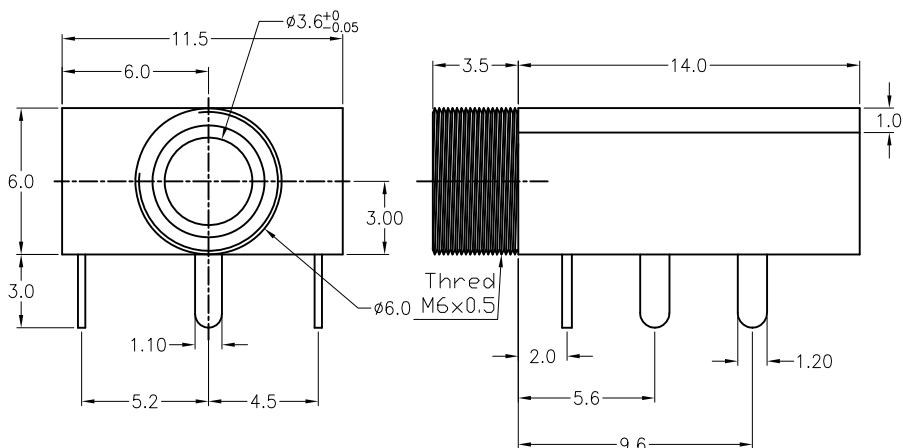
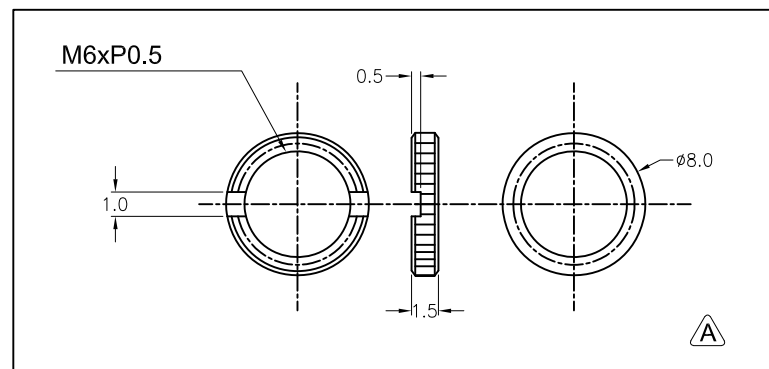
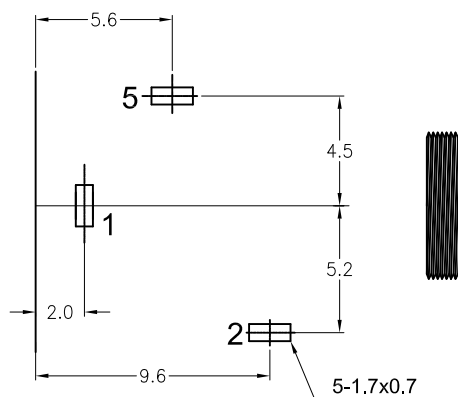


APPROVED: _____

DATE: _____ TITLE: _____


Rev	AWO #	Description	Date	Appr
-		RELEASED	2/5/21	
A		UPDATED DRAWING	1/7/22	JJ/KC

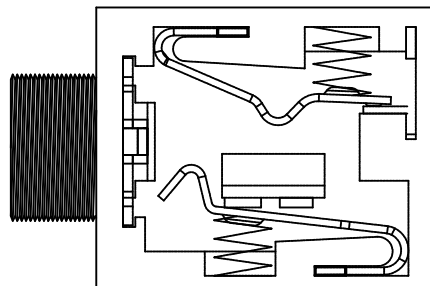

SPECIFICATIONS:

Material: RECOMMENDED PCB LAYOUT
Insulator: PBT, Glass reinforced, rated UL 94V-0
Insulator color: Black
Cover: P.C, Transparent
Earth terminal: Brass, Tin plated
Ring spring: Phosphor Bronze, Tin plated
Tip spring: Phosphor Bronze, Tin plated
Bushing: Brass, Nickel plated
Spring: Stainless Steel, Nature
Nut: Brass, Nickel plated (A)

Electrical:
Voltage & Current rating: 12 VDC, 2A max, 100 VAC, 1A max.
Contact resistance: 30 mohms max @ AC 100mA max, 1KHz.
Insulation resistance: 100 Mohms min @ 500V DC
Dielectric withstanding voltage: 500 VAC for 1 minute
Environmental:
Lead free, RoHS compliant.



UNLESS OTHERWISE SPECIFIED ALL DIMENSIONS ARE MILLIMETERS. TOLERANCES: EXCEPT AS NOTED

	MM
X.	± 0.38
.X	± 0.25
.XX	± 0.13
.XXX	± 0.05

DRAWN	OW	2/5/21
CHECKED	NL	2/5/21
APPROVED		

THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY AND SHOULD NOT BE USED WITHOUT PRIOR WRITTEN PERMISSION FROM ADAM TECH

ADAM
TECH

909 Rahway Avenue,
Union, NJ 07083
Phone: 908-687-5000
Fax: 908-687-5710

TITLE				
3.5MM EARPHONE JACK				
SIZE	PART NO.			REV.
X	ASJ-37A-3			A
REF:	S00002C	SCALE: NTS	SHEET 1	OF 1