


APPROVED: _____


DATE: _____ TITLE: _____


Rev	AWO #	Description	Date	Appr
-		RELEASED	10/19/15	
A		UPDATE SPEC.	11/13/15	AY/YC
B		UPDATE DIM.	3/16/16	AY/MY
C		UPDATED DRAWING	1/11/22	JJ/LW





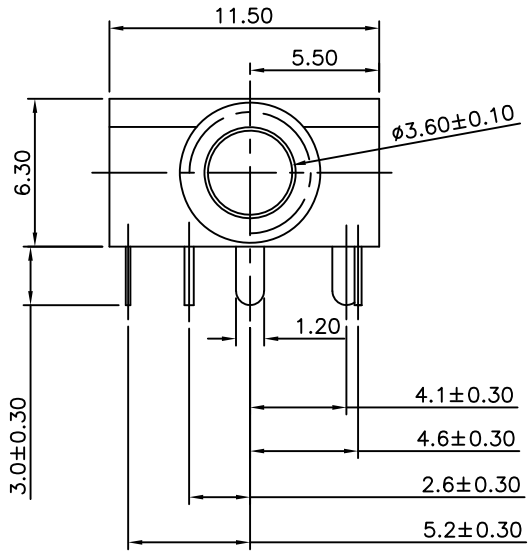


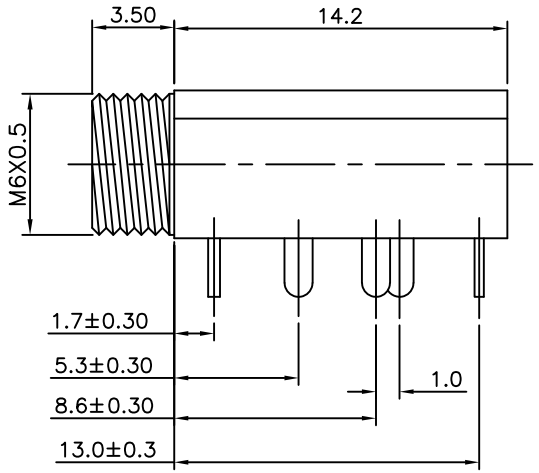

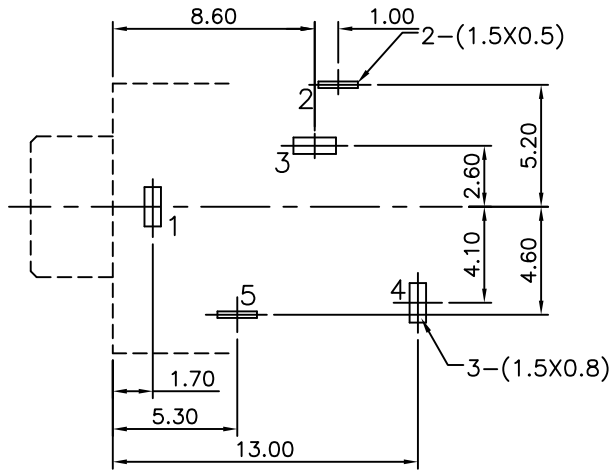





ASJ-37S-05-M	ASJ-37S-4B-M	ASJ-37S-03-M	ASJ-37S-3A-M	ASJ-37S-4A-M
				

SPECIFICATIONS:
Material:
Insulator: PBT, rated UL 94V-0
Insulator color: Black
Cover: PC
Axis Support: Brass, Nickel plated
Contact: Copper Alloy, Gold plated
Plating:
Tin over Copper underplate
Electrical:
Rating: DC 30V, 0.5 A.
Contact resistance: 30 mohms
Insulation resistance: 100 Mohms min @ DC 250V.
Dielectric withstanding voltage: 500 VAC
Environmental:
Lead free, RoHS compliant. RoHS COMPLIANT

UNLESS OTHERWISE SPECIFIED ALL DIMENSIONS ARE MILLIMETERS. TOLERANCES: EXCEPT AS NOTED

MM		ANGLE	
X	± .50	X	±3°
.X	± .30	X.X	±2°
.XX	± .20	X.XX	±1°
.XXX	± .10		

DRAWN	AY	10/19/15
CHECKED	YC	10/19/15
APPROVED		

THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY AND SHOULD NOT BE USED WITHOUT PRIOR WRITTEN PERMISSION FROM ADAM TECH

ADAM TECH
909 Rahway Avenue,
Union, NJ 07083
Phone: 908-687-5000
Fax: 908-687-5710

TITLE: 3.5MM STEREO JACK
M6 x 0.5 THREADED BUSHING

SIZE	PART NO.	REV.
X	ASJ-37S-XX-M	C

REF:	SCALE:	SHEET
S00102C	NTS	1 OF 1