
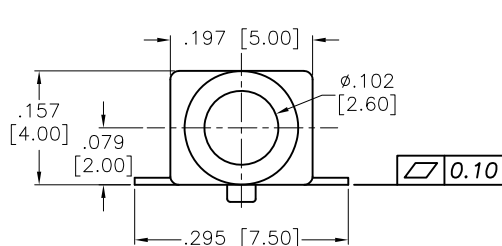
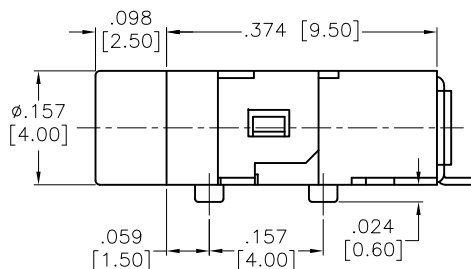




APPROVED: _____

DATE: _____ TITLE: _____

Rev	AWO #	Description	Date	Appr
-		RELEASED	8/21/18	

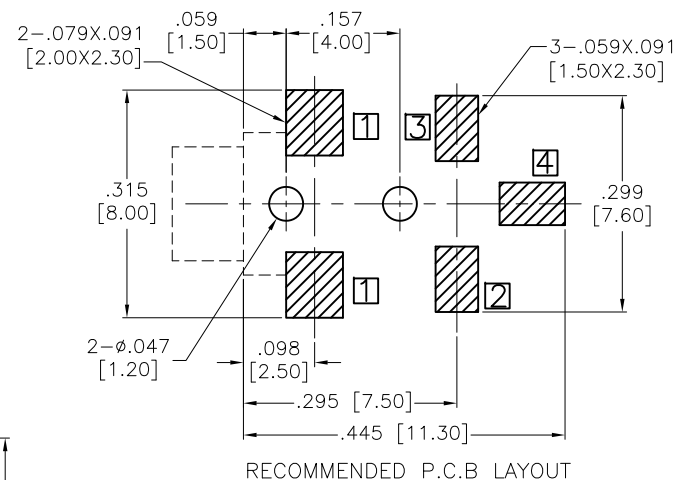

Matching Plug

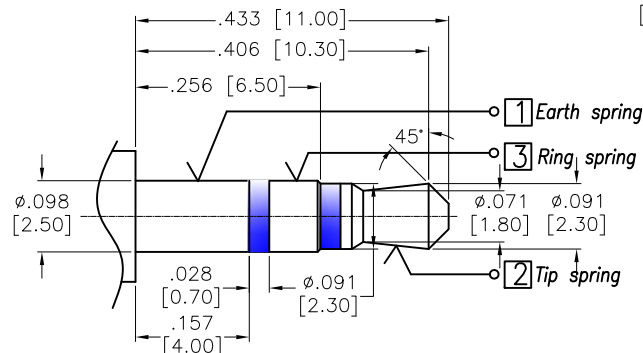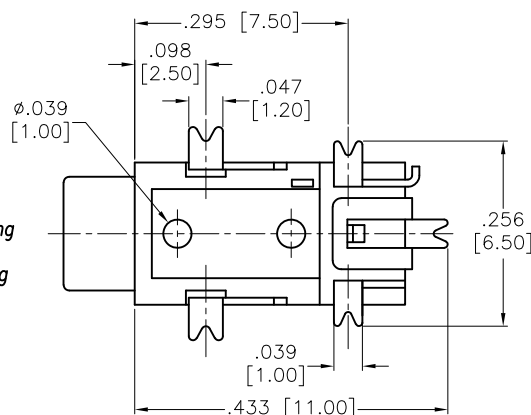

PACKAGED ON TAPE & REEL

SPECIFICATIONS:

Material:

Insulator: Hi-temp thermoplastic, rated UL 94V-0

Insulator color: Black

Contact: Copper Alloy

Plating:

Gold flash over Nickel underplate overall

Electrical:

Voltage rating: 30 VDC

Current rating: 0.5 A

Contact resistance: 30mΩ max.

Insulation resistance: 100 MΩ min. @ 500 VDC

Dielectric withstanding voltage: 500 VAC

Temperature Rating:

Operating temperature: -20°C to +70°C

Environmental:

Lead free, RoHS compliant.



ADAM P/N	ASJ-38-4B-T/R	ASJ-38-3A-T/R	ASJ-38-3-T/R	ASJ-38-2-T/R
SCHEMATIC				

UNLESS OTHERWISE SPECIFIED
ALL DIMENSIONS ARE INCHES [MM]
TOLERANCES: EXCEPT AS NOTED
INCHES HOLES
.X ±.10 Ø.X ±.10
.XX ±.020 Ø.XX ±.015
.XXX ±.015 Ø.XXX ±.010

APPROVALS		DATE
DRAWN	AY	8/21/18
CHECKED	RC1	8/21/18
APPROVED		

ADAM TECH
INTERCONNECTS
909 Rahway Avenue,
Union, NJ 07083
Phone: 908-687-5000
Fax: 908-687-5710

TITLE			
2.50MM STEREO JACK			
SIZE	PART NO.	REV.	
X	ASJ-38-XX-T/R	-	
REF:	S00002C	SCALE:	SHEET 1 OF 1