
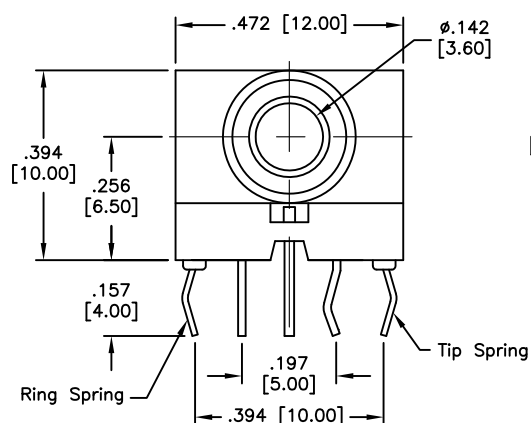
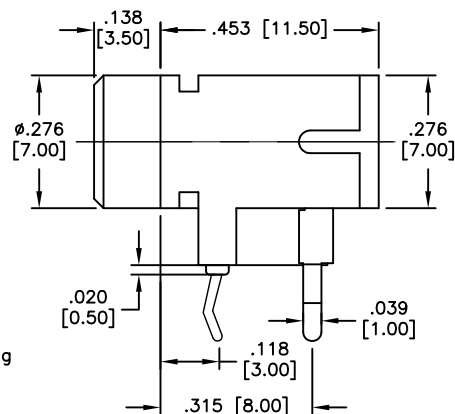

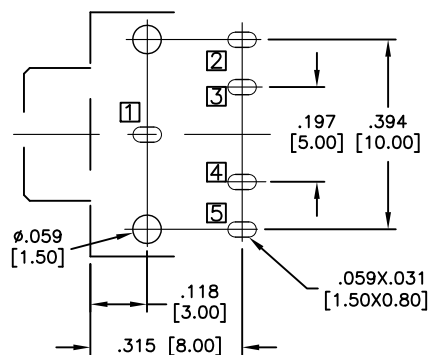


APPROVED: _____

DATE: _____ TITLE: _____

Rev	AWO #	Description	Date	Appr
-		RELEASED	12/10/04	
A		REDRAWN	8/30/10	
B		ADDED SHAPE	6/26/13	
C		UPDATE SPEC.	7/19/17	AY/MY

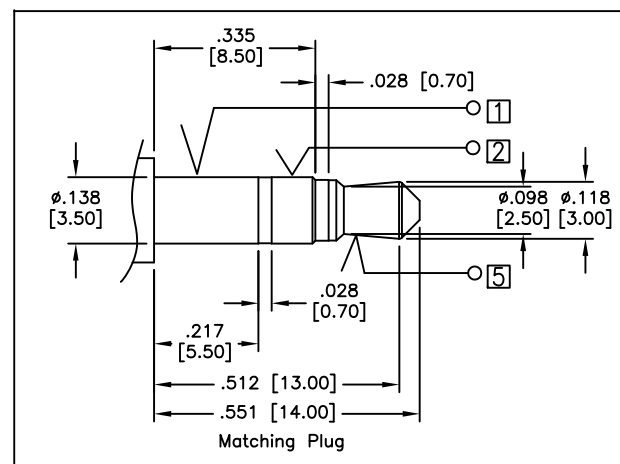

SPECIFICATIONS:

Material:

Insulator: PBT, rated UL 94V-0

Insulator color: Black

Contacts: Copper Alloy, Tin plated

Spring: Stainless Steel, Tin plated

Electrical:

Voltage rating: 30 VDC.

Current rating: 0.5 A.

Contact resistance: 50 mohms max.

Insulation resistance: 100 Mohms min @ 500 VDC.

Dielectric withstanding voltage: 500 VAC

Temperature Rating:

Operating temperature: -20°C to +70°C

Environmental:

Lead free, RoHS compliant.



ADAM P/N	ASJ-6-5	ASJ-6-4B	ASJ-6-3A	ASJ-6-3	ASJ-6-2	ASJ-6-4A
SCHEMATIC						

UNLESS OTHERWISE SPECIFIED
ALL DIMENSIONS ARE INCHES [MM]
TOLERANCES: EXCEPT AS NOTED
INCHES HOLES
.X ± .10 Ø.X ± .10
.XX ± .020 Ø.XX ± .015
.XXX ± .015 Ø.XXX ± .010

APPROVALS		DATE
DRAWN	SS	10/4/04
CHECKED	AY	8/30/10
APPROVED		

ADAM TECH

909 Rahway Avenue, Union, NJ 07083

Phone: 908-687-5000 Fax: 908-687-5710

TITLE		STEREO PHONE JACK, 3.5mm	
SIZE	PART NO.	REV.	
X	ASJ-6-XX	C	
REF: S00002C	SCALE: NTS	SHEET 1 OF 1	