

Rev	AWO #	Description	Date	Appr
-		RELEASED	6/4/15	

APPROVED: _____


DATE: _____ TITLE: _____

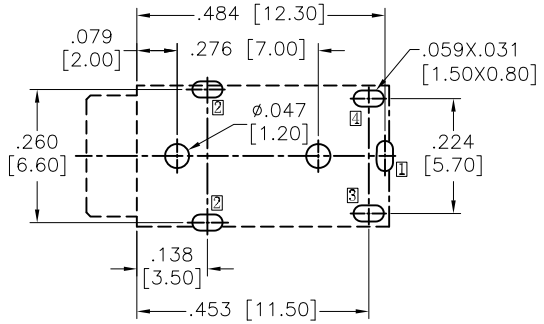



RECOMMENDED PCB LAYOUT


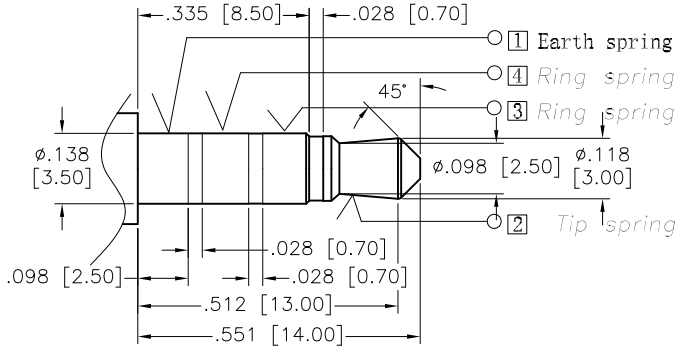


MATE PLUG

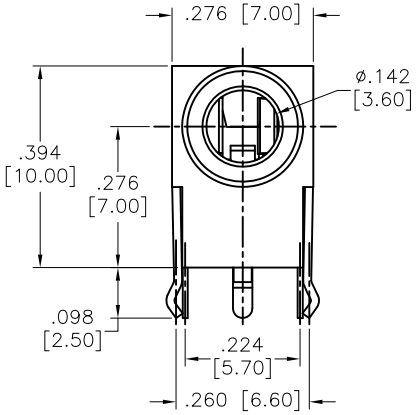

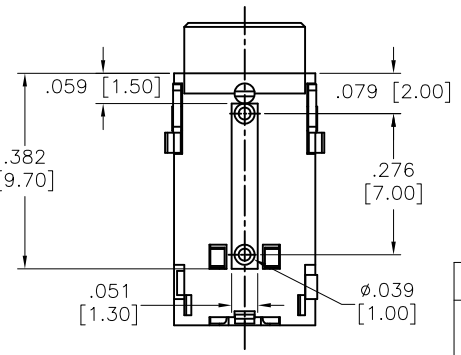

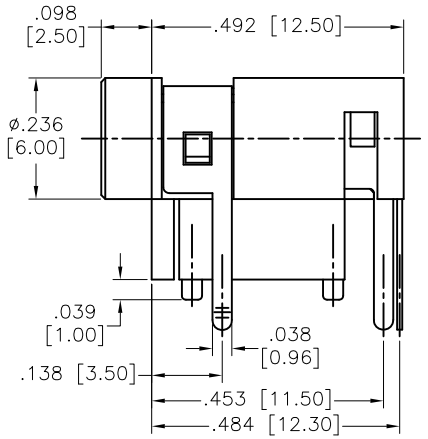

ADAM P/N	ASJ-76A-3S	ASJ-76A-03
SCHEMATIC		

SPECIFICATIONS:
Material:
Insulator: PBT, Glass reinforced, rated UL 94V-0
Insulator color: Black
Contacts: Copper Alloy
Plating:
Silver over Copper underplate overall
Electrical:
Operating voltage: 30 VDC
Current rating: 0.5 A
Contact resistance: 30 mohms max.
Insulation resistance: 100 Mohms min. @ 500 VDC
Dielectric withstanding voltage: 500 VAC for 1 minute
Temperature Rating:
Operating temperature: -20°C to +70°C
Environmental:
Lead free, RoHS compliant.

RoHS COMPLIANT

UNLESS OTHERWISE SPECIFIED
ALL DIMENSIONS ARE INCHES [MM]
TOLERANCES: EXCEPT AS NOTED

INCHES		HOLES	
.X	± .10	Ø.X	±.10
.XX	± .020	Ø.XX	±.015
.XXX	± .015	Ø.XXX	±.010

APPROVALS		DATE
DRAWN	HR	6/4/15
CHECKED	SC	6/4/15
APPROVED		

ADAM TECH
909 Rahway Avenue, Union, NJ 07083
Phone: 908-687-5000 Fax: 908-687-5710

TITLE
STEREO PHONE JACK, 3.5mm

SIZE	PART NO.	REV.
X	ASJ-76A-XX	-

REF: S00002C | SCALE: NTS | SHEET 1 OF 1