

APPROVED: _____


DATE: _____ TITLE: _____

Rev	AWO #	Description	Date	Appr
-		RELEASED	11/13/	
A		UPDATE DRAWING	10/13/16	AY/MY

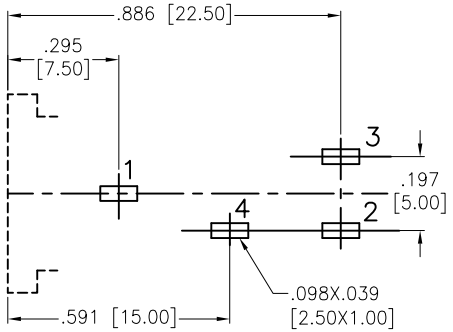

RECOMMENDED PCB LAYOUT

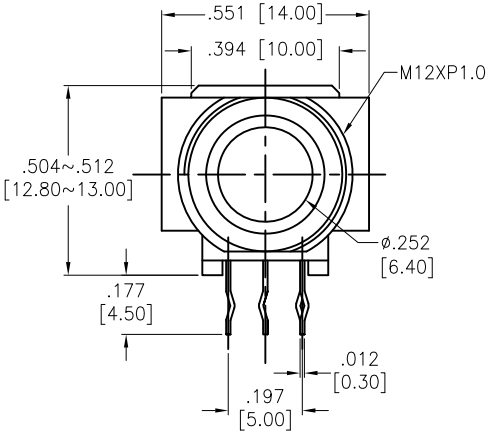

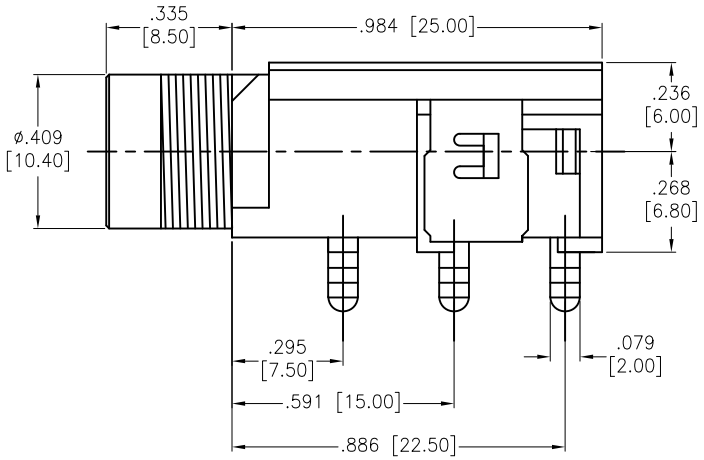

ADAM P/N	ASJ-77-4B	ASJ-77-3A	ASJ-77-3	ASJ-77-2
Schematic				

SPECIFICATIONS:
Material:
Housing & Cover: PBT, rated UL 94V-0
Housing & Cover color: Black
Contacts: Phosphor Bronze, Silver plated.
Electrical:
Rated Voltage and Current: DC 12V, 1A.
Contact resistance: 30 mohms max.
Insulation resistance: 100 Mohms min. @ 500V DC
Withstanding votage: 500 VAC
Environmental:
Lead free, RoHS compliant.

RoHS COMPLIANT

UNLESS OTHERWISE SPECIFIED
ALL DIMENSIONS ARE INCHES [MM]
TOLERANCES: EXCEPT AS NOTED

INCHES		HOLES	
.X	± .10	Ø.X	±.10
.XX	± .020	Ø.XX	±.015
.XXX	± .015	Ø.XXX	±.010

APPROVALS		DATE
DRAWN	SS	11/13/07
CHECKED		
APPROVED		

ADAM TECH
909 Rahway Avenue, Union, NJ 07083
Phone: 908-687-5000 Fax: 908-687-5710

TITLE
6.35MM PHONE JACK, PCB MOUNT

SIZE	PART NO.	REV.
X	ASJ-77-XX	A

REF:	SCALE:	SHEET
S00140T	NTS	1 OF 1