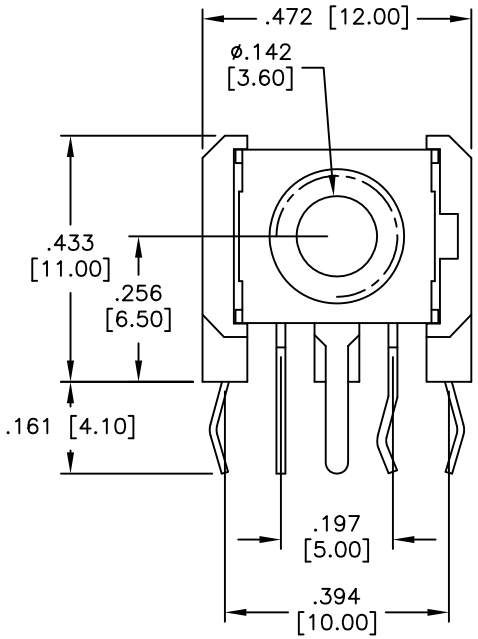
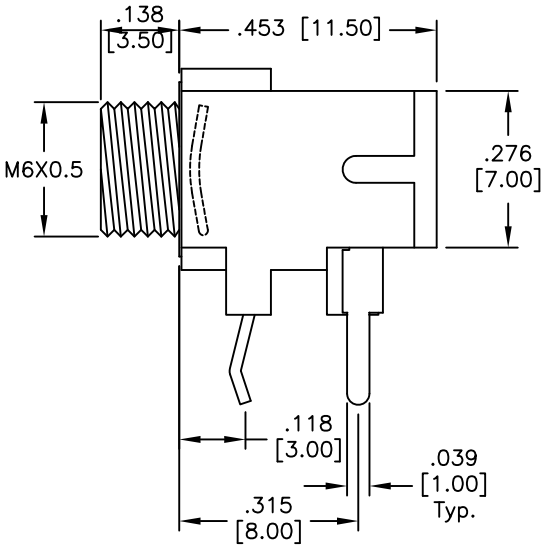
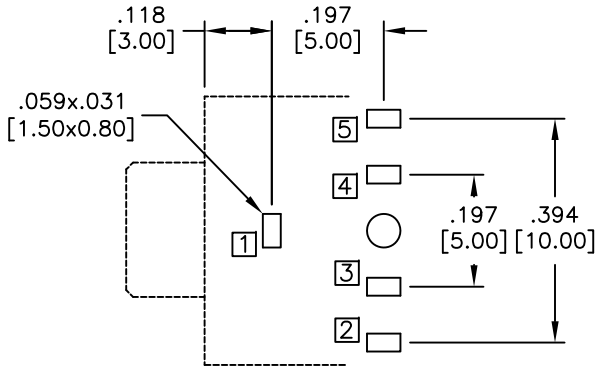
Rev	AWO #	Description	Date	Appr
-		RELEASED	7/13/09	

APPROVED: _____





DATE: _____ TITLE: _____







RECOMMENDED PCB LAYOUT
(Copper-sided view)

CONTACT FORM	ASJ-7H-5-M	ASJ-7H-4B-M	ASJ-7H-3A-M	ASJ-7H-3-M
SCHEMATIC				

SPECIFICATIONS:
Material:
Insulator: PBT, glass reinforced, rated UL 94V-0
Insulator color: Black
Bushing: Brass, Nickel plated
Contacts: Copper Alloy
Plating:
Tin over Copper underplate
Electrical:
Operating voltage: 30 VDC max.
Current rating: 0.5 Amp max.
Contact resistance: 30 mohms max. initial
Insulation resistance: 100 Mohms min.
Dielectric withstanding voltage: 500 VAC for 1 minute
Temperature Rating:
Operating temperature: -65°C to +125°C
Environmental:
Lead free, RoHS compliant.
Recommended soldering temp: 235°C for 5 sec.

RoHS COMPLIANT

UNLESS OTHERWISE SPECIFIED
ALL DIMENSIONS ARE INCHES [MM]
TOLERANCES: EXCEPT AS NOTED

INCHES		HOLES	
.X	± .10	Ø.X	±.10
.XX	± .020	Ø.XX	±.015
.XXX	± .015	Ø.XXX	±.010

APPROVALS		DATE
DRAWN	DY	7/13/09
CHECKED		
APPROVED		

ADAM TECH
909 Rahway Avenue, Union, NJ 07083
Phone: 908-687-5000 Fax: 908-687-5710

TITLE
STEREO JACK
M6 x 0.5 THREADED BUSHING

SIZE	PART NO.	REV.
X	ASJ-7H-X-M	-

REF:	SCALE:	SHEET
S00002C	NTS	1 OF 1