


Rev	AWO #	Description	Date	Appr
-		RELEASED	2/07/09	

APPROVED: _____


DATE: _____ TITLE: _____

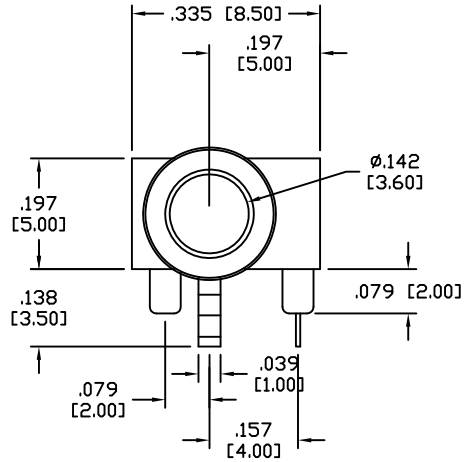

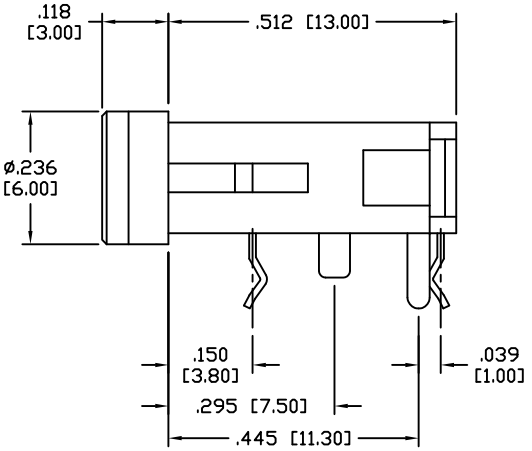



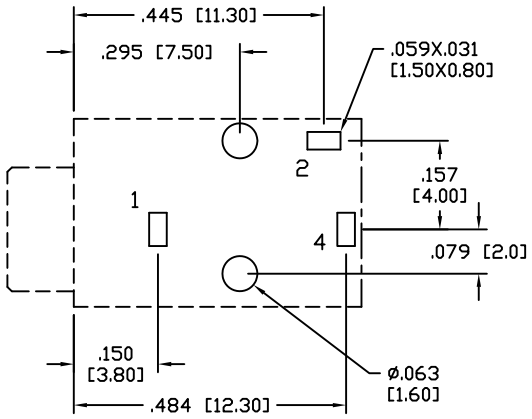


RECOMMENDED PCB LAYOUT

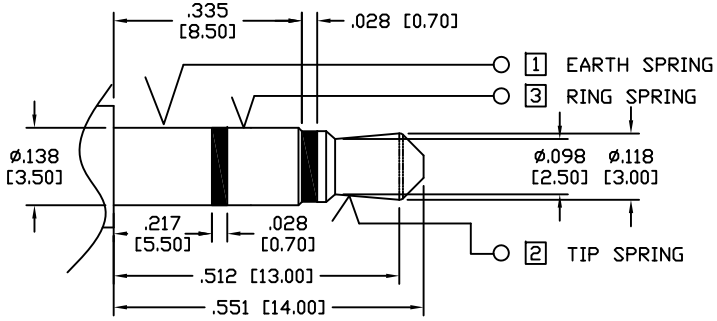

MATING PLUG

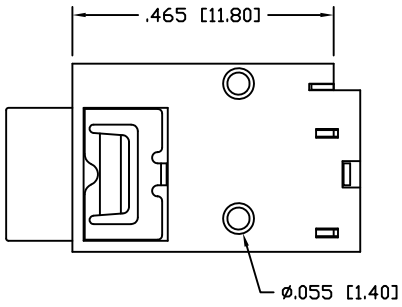

PART NO.	ASJ-94-3A	ASJ-94-3
SCHEMATIC		

SPECIFICATIONS:

Material:

Housing: PBT, Rated UL94V-0

Contacts: Copper Alloy

Bushing: Brass, Nickel plated

Plating:

Tin over Copper underplate

Electrical:

Rating: DC 30V, 0.5A max.

Contact Resistance: 30 mOhm Max

Insulation Resistane: 100 Mohm Min@ DC 250V

Dielectric Withstanding Voltage: 500V AC For 1 Minute.

Environmental:

Lead free, RoHS compliant.

Recommended soldering temp: 235°C for 5 sec.

RoHS COMPLIANT

UNLESS OTHERWISE SPECIFIED
ALL DIMENSIONS ARE INCHES [MM]
TOLERANCES: EXCEPT AS NOTED

INCHES		HOLES	
.X	± .10	Ø.X	±.10
.XX	± .020	Ø.XX	±.015
.XXX	± .015	Ø.XXX	±.010

APPROVALS		DATE
DRAWN	DY	2/07/09
CHECKED	CH	2/07/09
APPROVED		

ADAM TECH

909 Rahway Avenue, Union, NJ 07083

Phone: 908-687-5000 Fax: 908-687-5710

TITLE: 3.5MM STEREO PHONE JACK

SIZE	PART NO.	REV.
X	ASJ-94-X	-

REF:	SCALE:	SHEET
S00002C	NTS	1 OF 1