

APPROVED: _____


DATE: _____ TITLE: _____




Rev	AWO #	Description	Date	Appr
-		RELEASED	3/03/09	
A		REVISED DIM.	07/11/13	
B		REVISED SPEC.	6/20/14	AY/GC
C		UPDATE DRAWING	10/27/22	WX/KC

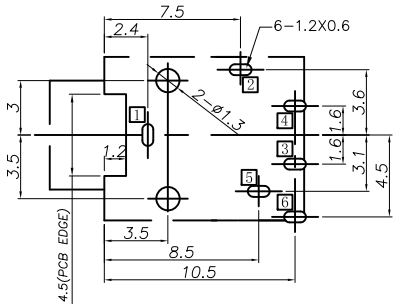


RECOMMENDED PCB LAYOUT

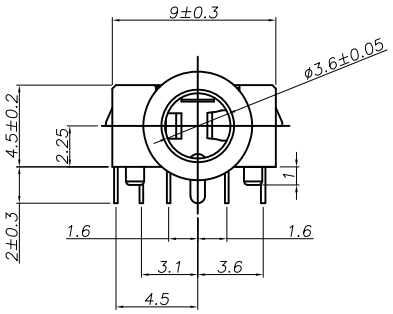


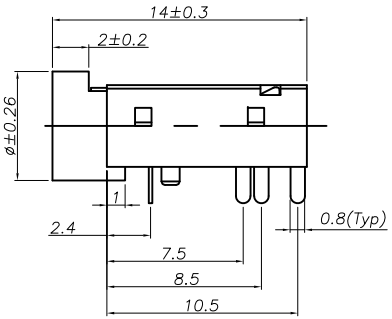

PART NO.	ASJ-99-R	ASJ-99-K	ASJ-99-D
SCHEMATIC			



Matching Plug

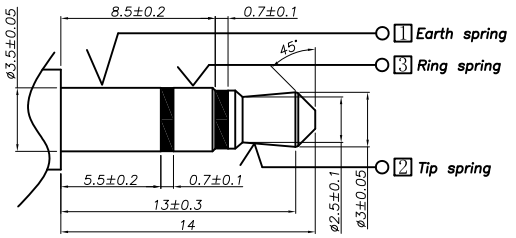

SPECIFICATIONS:

Material:

Housing: (PA10T) Hi-Temp Thermoplastic, Rated UL94V-0, Color: Black
Break terminal: Brass
Shunt terminal: Brass
Trasfer terminal: Phosphor Bronze
Ring spring: Phosphor Bronze
Tip spring: Phosphor Bronze
Earth spring: Phosphor Bronze

Plating:

Silver over Copper underplate

Electrical:

Rating: DC 30V, 0.5A max.
Contact Resistance: 50 mOhm Max
Insulation Resistane: 100 Mohm Min@ DC 500V
Dielectric Withstanding Voltage: 500V AC

Temperature Rating:

Operating temperature: -20°C to +70°C

Environmental:

Lead free, RoHS compliant. RoHS COMPLIANT

PACKAGED ON TAPE & REEL

UNLESS OTHERWISE SPECIFIED ALL DIMENSIONS ARE MILLIMETERS. TOLERANCES: EXCEPT AS NOTED

MM ± .30 ANGLES ±2°

DRAWN	DY	3/03/09
CHECKED		
APPROVED		

THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY AND SHOULD NOT BE USED WITHOUT PRIOR WRITTEN PERMISSION FROM ADAM TECH

ADAM TECH
909 Rahway Avenue,
Union, NJ 07083
Phone: 908-687-5000
Fax: 908-687-5710

TITLE: 3.5MM STEREO PHONE JACK

SIZE	PART NO.	REV.
X	ASJ-99-X-HT-T/R	C

REF: S00002C | SCALE: NTS | SHEET 1 OF 1