


APPROVED: _____


DATE: _____ TITLE: _____


Rev	AWO #	Description	Date	Appr
-		RELEASED	5/28/14	
A		UPDATED DRAWING	3/7/17	HR/CT

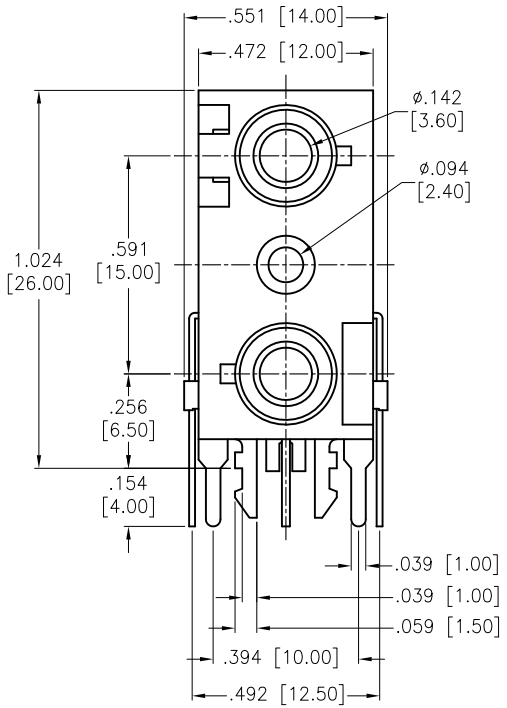

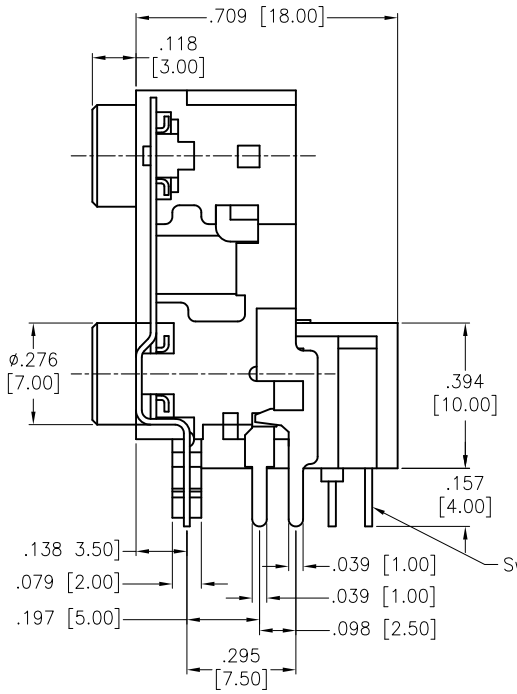

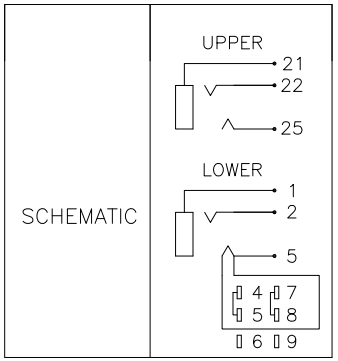



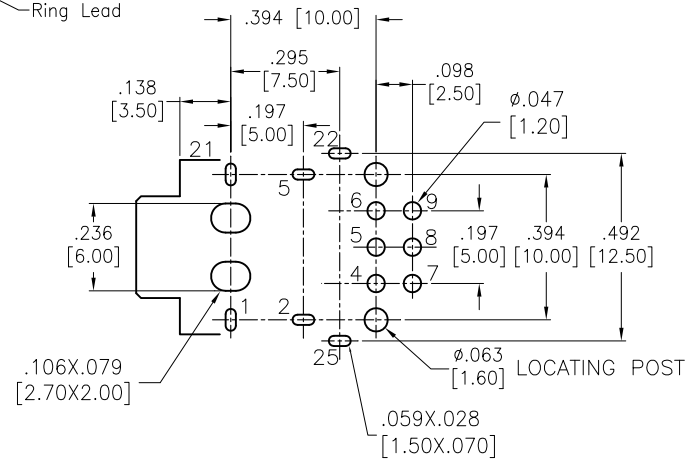

RECOMMENDED PCB LAYOUT
BOTTOM VIEW

SPECIFICATIONS:
Material:
Insulator: PBT, Glass reinforced, rated UL 94V-0
Insulator color: Black
Terminal: Phosphor Bronze
Spring: Phosphor Bronze
Switch Pin & Tip Lead & Ring Lead: Brass
Plating:
Silver over Copper underplate overall
Electrical:
Contact resistance: 30 mohms max
Insulation resistance: 100 Mohms min @ 500 VDC
Dielectric withstanding voltage: 500 VAC for 1 minute
Environmental:
Lead free, RoHS compliant.

RoHS COMPLIANT

UNLESS OTHERWISE SPECIFIED
ALL DIMENSIONS ARE INCHES [MM]
TOLERANCES: EXCEPT AS NOTED

INCHES		HOLES	
.X	± .10	Ø.X	±.10
.XX	± .020	Ø.XX	±.015
.XXX	± .015	Ø.XXX	±.010

APPROVALS		DATE
DRAWN	HR	5/28/14
CHECKED	AC	5/29/14
APPROVED		

ADAM TECH
909 Rahway Avenue, Union, NJ 07083
Phone: 908-687-5000 Fax: 908-687-5710

TITLE: 3.5MM STACKED DUAL STEREO JACK, FULLY SHIELDED, WITH SWITCH

SIZE	PART NO.	REV.
X	ASJ-DP-38-3-SW	A

REF: S00062T | SCALE: NTS | SHEET 1 OF 1