

Rev	AWO #	Description	Date	Appr
-		RELEASED	11/22/22	


APPROVED: _____


DATE: _____ TITLE: _____

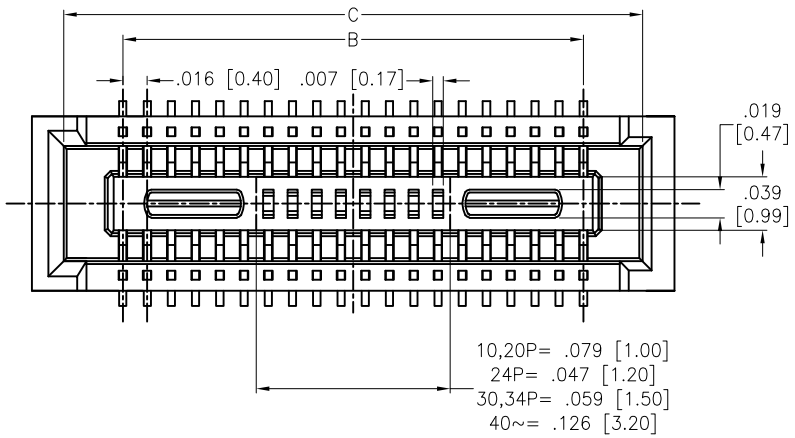


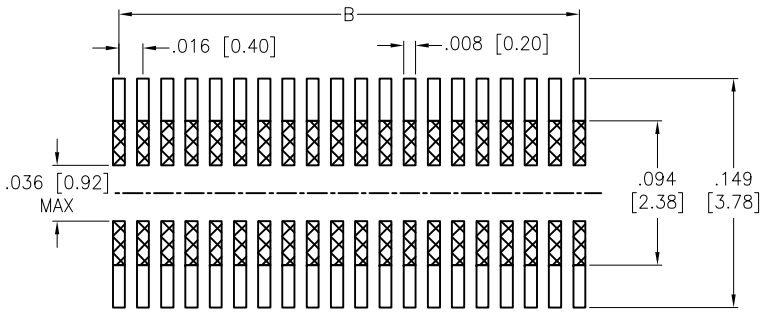

RECOMMENDED PCB LAYOUT

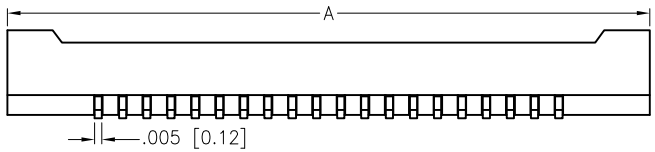

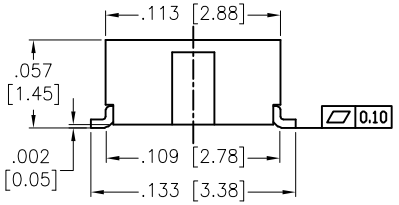

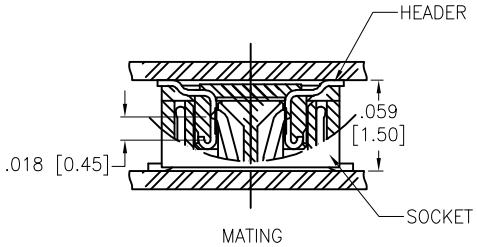

SPECIFICATIONS:
Material:
Insulator: Hi-Temp Thermoplastic, rated UL 94V-0
Insulator color: Black
Contacts: Phosphor Bronze
Plating:
Gold flash over Nickel underplate overall
Electrical:
Voltage rating: 30 VAC
Current rating: 0.3 A
Contact resistance: 90 mohms max
Insulation resistance: 50 Mohms min/ 100 VDC
Dielectric withstanding voltage: 100 VAC for one minute
Temperature Rating:
Operating temperature: -35°C to +85°C
Environmental:
Lead free, RoHS compliant RoHS COMPLIANT

PACKAGED ON TAPE & REEL
Positions: 10, 20, 24, 30, 34, 40, 50, 60, 70, 80, 90, 100, 120
A= .016 [0.40] x No. of Positions per Row + .102 [2.60]
B= .016 [0.40] x No. of Space
C= .016 [0.40] x No. of Positions per Row + .065 [1.65]

UNLESS OTHERWISE SPECIFIED ALL DIMENSIONS ARE INCHES [MM]. TOLERANCES: EXCEPT AS NOTED

INCHES		HOLES	
.X	± .10	Ø.X	±.10
.XX	± .020	Ø.XX	±.015
.XXX	± .015	Ø.XXX	±.010

DRAWN	JJ	11/22/22
CHECKED	YC	11/22/22
APPROVED		

THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY AND SHOULD NOT BE USED WITHOUT PRIOR WRITTEN PERMISSION FROM ADAM TECH

ADAM TECH
909 Rahway Avenue,
Union, NJ 07083
Phone: 908-687-5000
Fax: 908-687-5710

TITLE: .016 [0.40] BOARD TO BOARD SOCKET GOLD PLATED, 1.45MM HEIGHT

SIZE	PART NO.	REV.
X	BB4-SAT-XXX-G-1.45-NP-T/R	-

REF:	SCALE:	SHEET
S00181C	NTS	1 OF 1