
Rev	AWO #	Description	Date	Appr
-		RELEASED	6/20/22	
A		UPDATE PACKING	7/13/22	WX/KC

APPROVED: _____

DATE: _____ TITLE: _____

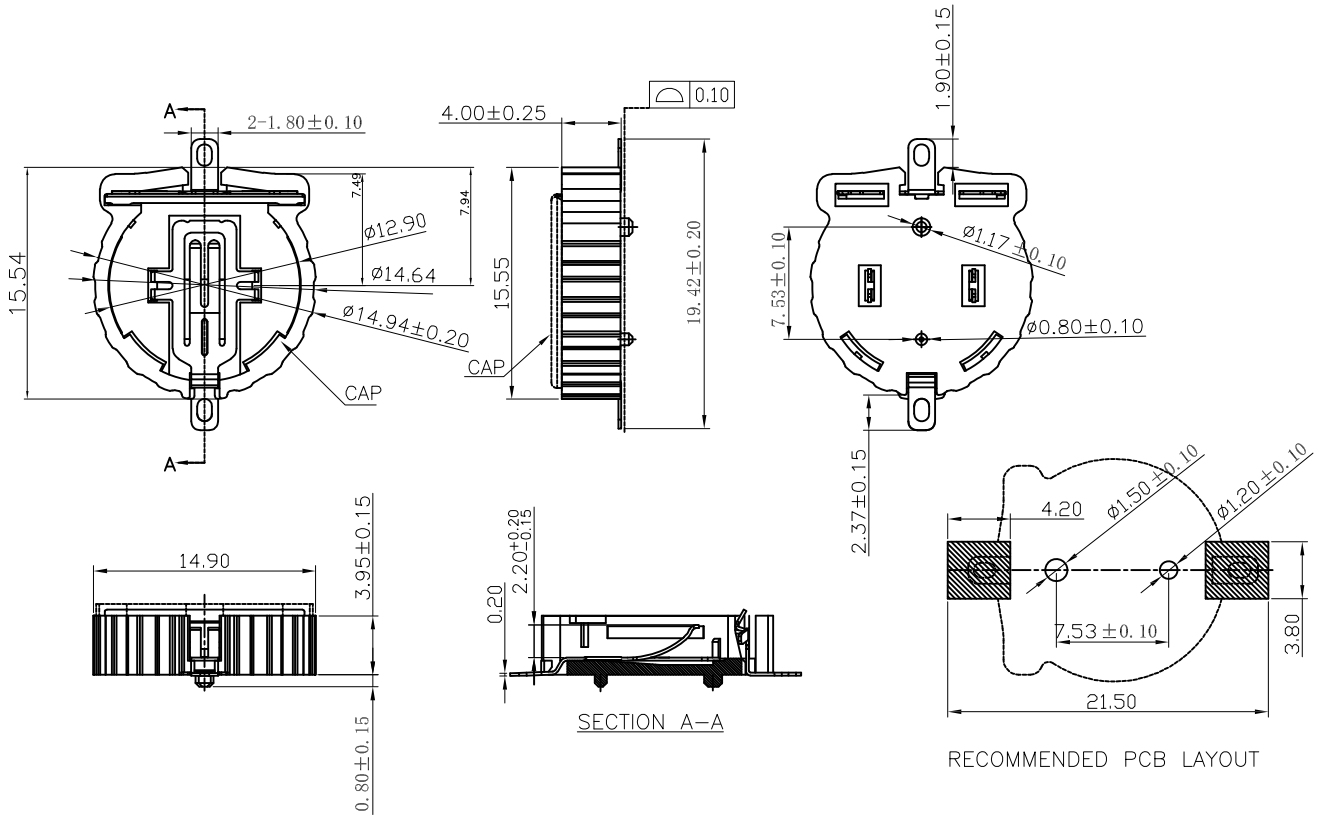

SPECIFICATIONS:

Material:

Housing: (PPS) Hi–Temp Thermoplastic, rated UL94V–0, Color: Brown

Contact: Phosphor Bronze, Gold plated

Electrical:

Contact resistance: 30 mohms max

Insulation resistance: 1,000 Mohms min

Dielectric Voltage: 500 VAC one sec level

Temperature Rating:

Operating temperature: –25°C to +85°C.

Environmental:

Lead free, RoHS compliant RoHS COMPLIANT

PACKAGED ON TAPE & REEL

UNLESS OTHERWISE SPECIFIED ALL DIMENSIONS ARE MILLIMETERS. TOLERANCES: EXCEPT AS NOTED

MM		ANGLE	
X	± .30	X	±1°
.X	± .25	.X	±0.5°
.XX	± .20		
.XXX	± .10		

DRAWN	WX	6/20/22
CHECKED	KC	6/20/22
APPROVED		

THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY AND SHOULD NOT BE USED WITHOUT PRIOR WRITTEN PERMISSION FROM ADAM TECH

ADAM TECH
909 Rahway Avenue,
Union, NJ 07083
Phone: 908-687-5000
Fax: 908-687-5710

TITLE: BATTERY HOLDER, SURFACE MOUNT, FOR CR1220, BROWN COLOR


SIZE	PART NO.	REV.
X	BH-44J-5-PP-T/R	A

REF: S00136C | SCALE: NTS | SHEET 1 OF 2


Rev	AWO #	Description	Date	Appr
SEE SHT 1 OF 2 FOR REVISION				


APPROVED: _____

DATE: _____ TITLE: _____

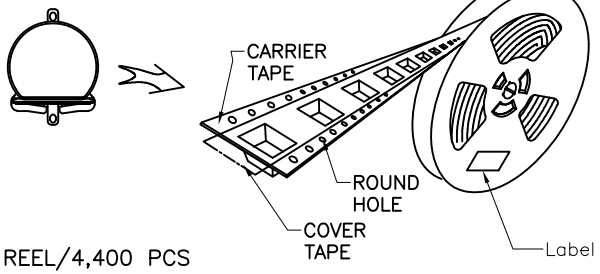


8 REEL/4,400 PCS








8 REEL/BAG



8 REEL/CARTON
4,400 PCS/CARTON



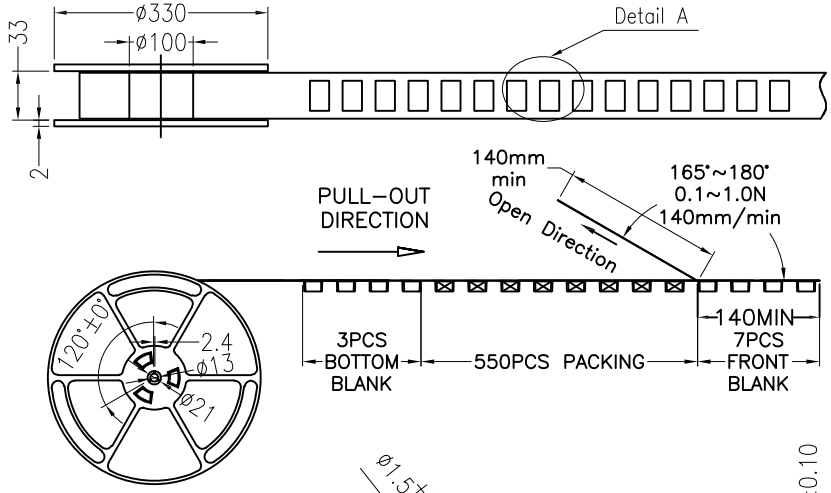

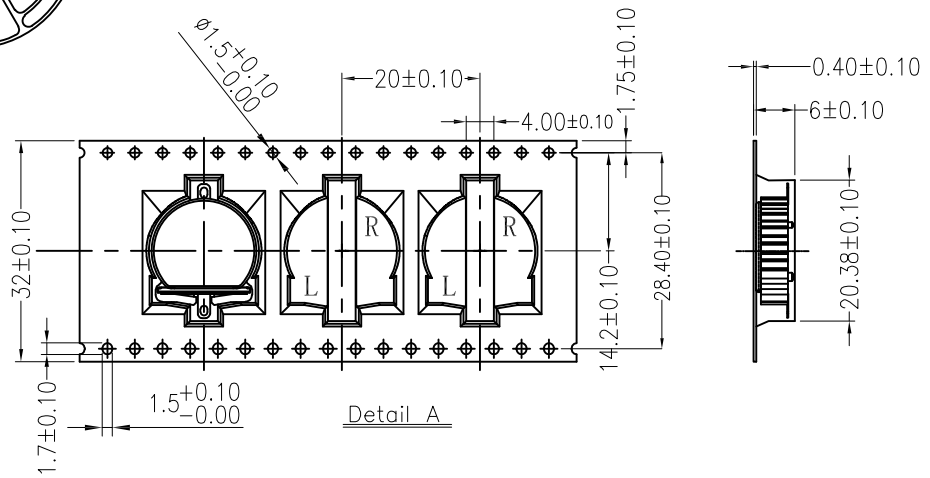

UNLESS OTHERWISE SPECIFIED ALL DIMENSIONS ARE MILLIMETERS. TOLERANCES: EXCEPT AS NOTED

MM		ANGLE	
X	± .30	X	±1°
.X	± .25	.X	±0.5°
.XX	± .20		
.XXX	± .10		

DRAWN	WX	6/20/22
CHECKED	KC	6/20/22
APPROVED		

THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY AND SHOULD NOT BE USED WITHOUT PRIOR WRITTEN PERMISSION FROM ADAM TECH

ADAM TECH
909 Rahway Avenue,
Union, NJ 07083
Phone: 908-687-5000
Fax: 908-687-5710

TITLE: BATTERY HOLDER, SURFACE MOUNT, FOR CR1220, BROWN COLOR

SIZE	PART NO.	REV.
X	BH-44J-5-PP-T/R	A

REF:	SCALE:	SHEET
S00136C	NTS	2 OF 2