

APPROVED: _____


DATE: _____ TITLE: _____

Rev	AWO #	Description	Date	Appr
-		RELEASED	1/12/11	
A		REVISED SPEC.	5/30/13	

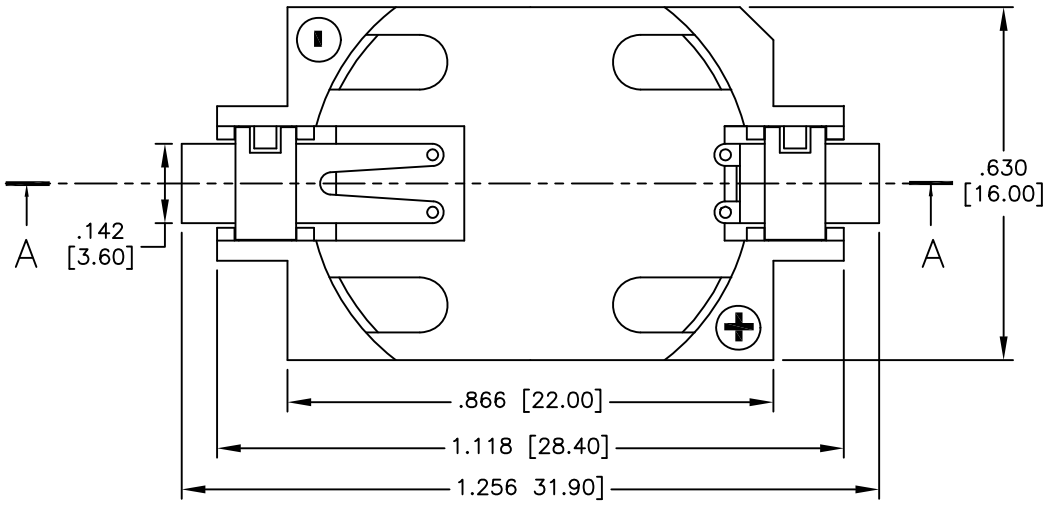

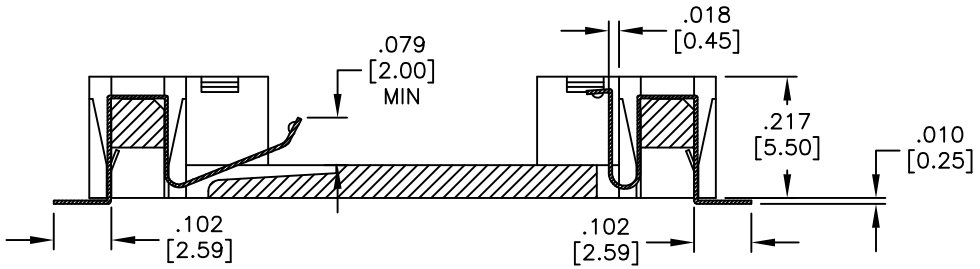

SECTION A–A

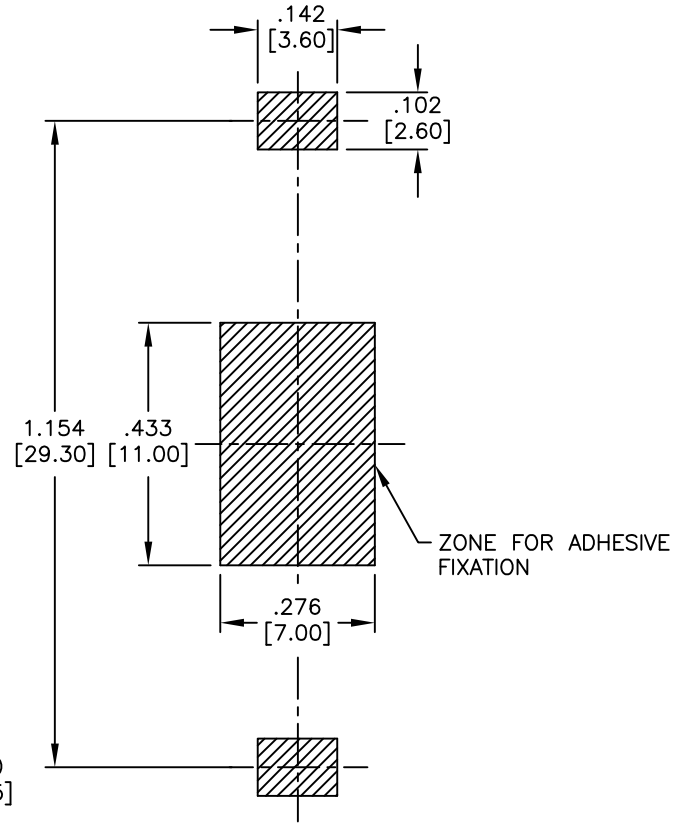

RECOMMENDED PCB LAYOUT

SPECIFICATIONS:
Material:
Housing: Hi–temp thermoplastic, rated UL 94V–0, color: White
Contact: Phosphor Bronze, 0.15MM THK, Gold plated
Electrical:
Voltage rating: 500V (AC/DC)
Current rating: 2A (AC/DC)
Contact resistance: 30 Milliohms
Insulation resistance: 500 Mega ohms
Dielectric withstanding voltage: 500 VAC for 1 minut
Capacitance: 2 Picofarad
Ambient temperature range: –55°C to 85°C.
Environmental:
Lead free, RoHS compliant RoHS COMPLIANT

UNLESS OTHERWISE SPECIFIED
ALL DIMENSIONS ARE INCHES [MM]
TOLERANCES: EXCEPT AS NOTED

INCHES		HOLES	
.X	± .10	Ø.X	±.10
.XX	± .020	Ø.XX	±.015
.XXX	± .015	Ø.XXX	±.010

APPROVALS		DATE
DRAWN	AY	1/12/11
CHECKED	VW	1/12/11
APPROVED		

ADAM TECH
909 Rahway Avenue, Union, NJ 07083
Phone: 908-687-5000 Fax: 908-687-5710

TITLE: COIN CELL BATTERY HOLDER FOR CELL CR2032, SMT TYPE

SIZE	PART NO.	REV.
X	BH-49-5	A

REF: S00030T | SCALE: NTS | SHEET 1 OF 1