

Rev	AWO #	Description	Date	Appr
-		RELEASED	1/7/14	


APPROVED: _____

DATE: _____ TITLE: _____

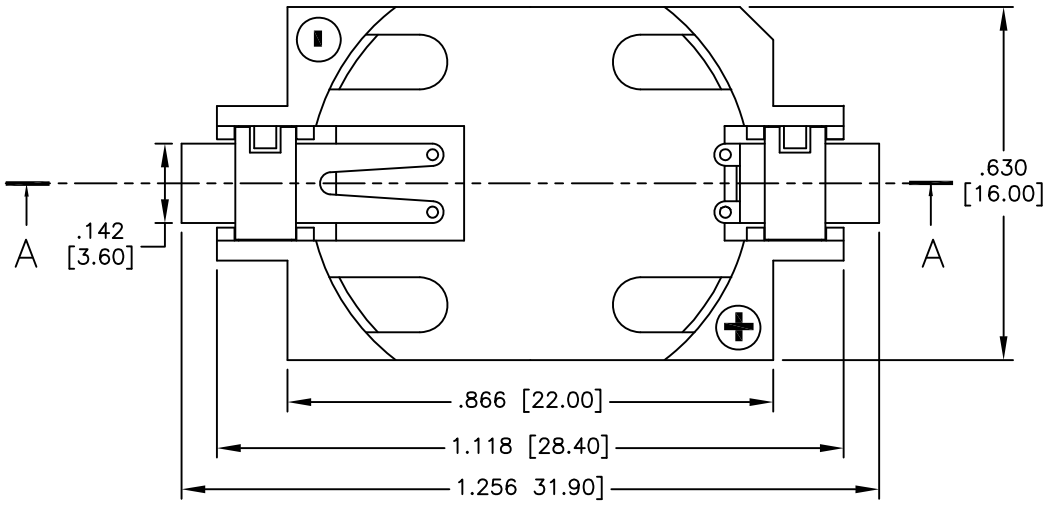

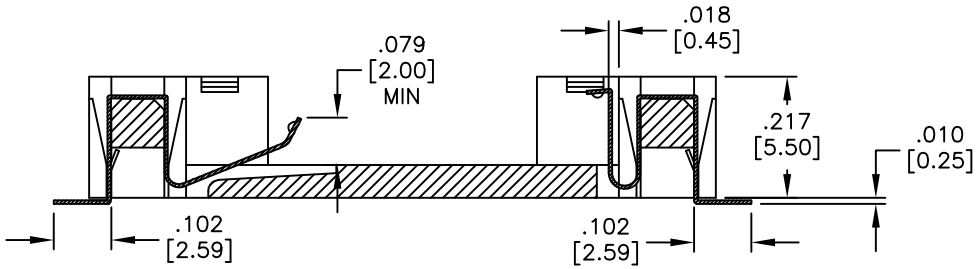

SECTION A–A

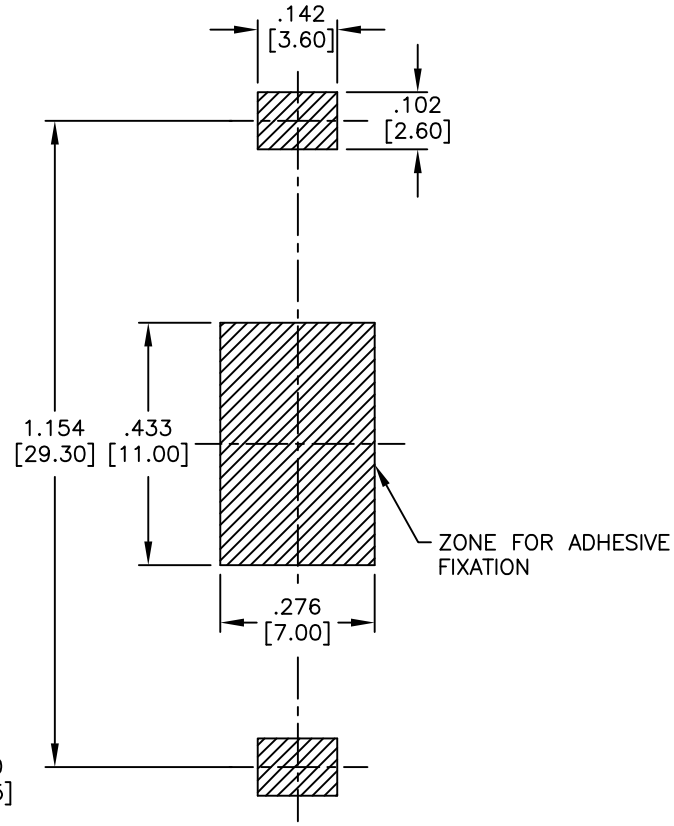

RECOMMENDED PCB LAYOUT

SPECIFICATIONS:
Material:
Housing: Hi–temp thermoplastic, rated UL 94V–0, color: White
Contact: Phosphor Bronze, 0.15MM THK, Gold plated
Electrical:
Voltage rating: 500V (AC/DC)
Current rating: 2A (AC/DC)
Contact resistance: 30 Milliohms
Insulation resistance: 500 Mega ohms
Dielectric withstanding voltage: 500 VAC for 1 minut
Capacitance: 2 Picofarad
Ambient temperature range: –55°C to 85°C.
Environmental:
Lead free, RoHS compliant

RoHS COMPLIANT

PACKAGED ON TAPE & REEL

UNLESS OTHERWISE SPECIFIED
ALL DIMENSIONS ARE INCHES [MM]
TOLERANCES: EXCEPT AS NOTED

INCHES		HOLES	
.X	± .10	Ø.X	±.10
.XX	± .020	Ø.XX	±.015
.XXX	± .015	Ø.XXX	±.010

APPROVALS		DATE
DRAWN	AY	1/7/14
CHECKED	LW	1/7/14
APPROVED		

ADAM TECH
909 Rahway Avenue, Union, NJ 07083
Phone: 908-687-5000 Fax: 908-687-5710

TITLE: COIN CELL BATTERY HOLDER FOR CELL CR2032, SMT TYPE


SIZE	PART NO.	REV.
X	BH-49-5-T/R	-


REF: S00030T | SCALE: NTS | SHEET 1 OF 2


Rev	AWO #	Description	Date	Appr
-		SEE SHT 1 OF 2 FOR REVISION	1/7/14	

APPROVED: _____

DATE: _____ TITLE: _____

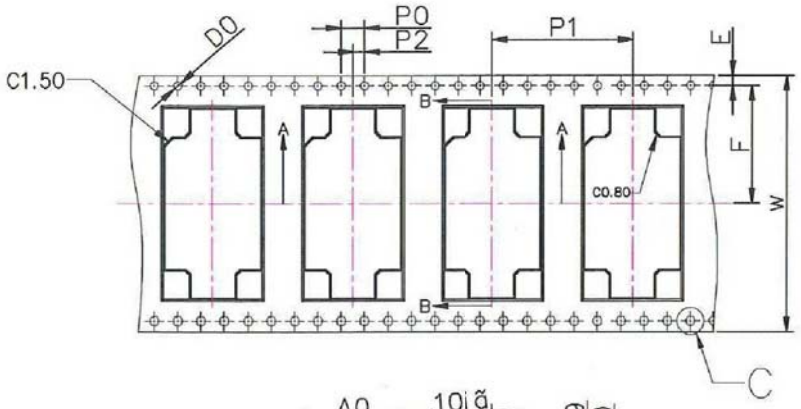


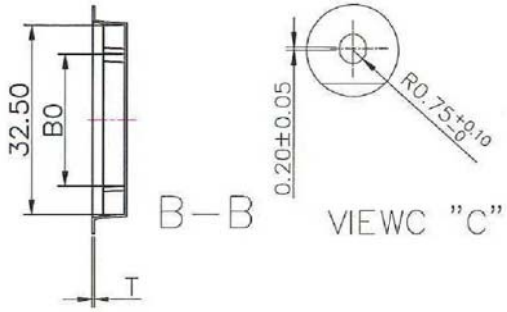

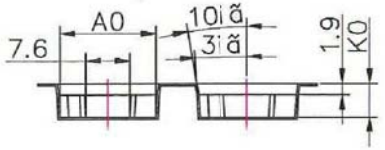

A–A

TAKING OUT DIRECTION



Carrier Taping specification

1. All dimensions pre EIA–481–c.
2. 10 pitches cumulative tolerance on tape±0.20mm.
3. Allowable camber to be 1mm/250mm.
4. K0 measured from a plane on the inside bottom of the pocket to the top surface of the carrier.
5. Pocket position relative to sprocket hole measured as true position of pocket , not pocket hole.
6. The cornet without the instruction is assumed to be R0.5 or less.
7. The pulling out taper of the pocket without the instruction is assumed to be 3° or less.
8. The material is PS black
9. Component load per 13"(ø330–100)reel: 500 pcs; 22"reel: 38.00 m

W	44.00±0.30
T	0.35±0.05
A0	16.45±0.10
B0	22.65±0.10
K0	5.75±0.10
E	1.75±0.10
F	20.20±0.10
P0	4.00±0.10
P1	24.00±0.10
P2	2.00±0.10
D0	ø1.50 +0.10 −0
D1	

UNLESS OTHERWISE SPECIFIED
ALL DIMENSIONS ARE MM
TOLERANCES: EXCEPT AS NOTED
.X ± 0.25
.XX ± 0.25
.XXX + 0.25

APPROVALS		DATE
DRAWN	AY	1/7/14
CHECKED	LW	1/7/14
APPROVED		

ADAM TECH
909 Rahway Avenue, Union, NJ 07083
Phone: 908-687-5000 Fax: 908-687-5710

TITLE: COIN CELL BATTERY HOLDER FOR CELL CR2032, SMT TYPE

SIZE	PART NO.	REV.
X	BH-49-5-T/R	-

REF: S00030T | SCALE: NTS | SHEET 2 OF 2