


APPROVED: _____

DATE: _____ TITLE: _____


Rev	AWO #	Description	Date	Appr
-		RELEASED	6/29/17	
A		UPDATED SPEC.	10/12/17	AY/MY
B		UPDATE DRAWING	11/18/20	LH/JL

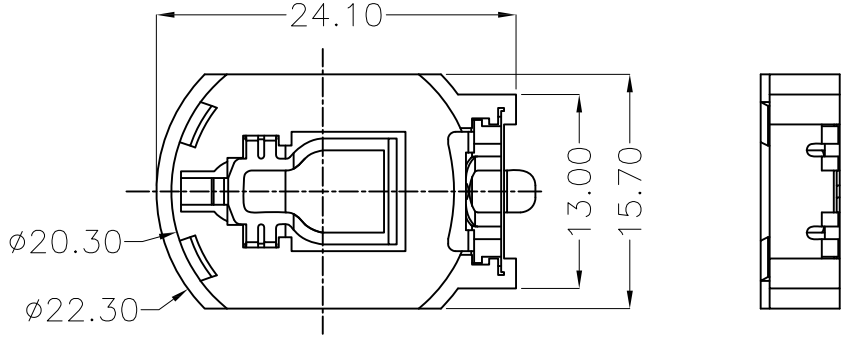

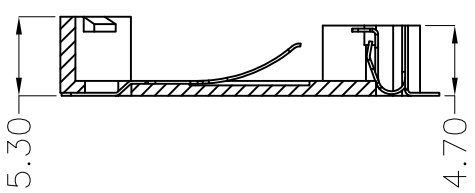

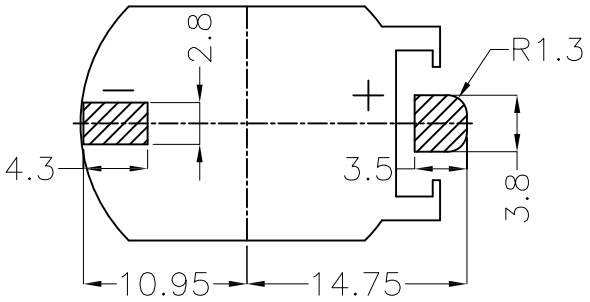

RECOMMENDED PCB LAYOUT

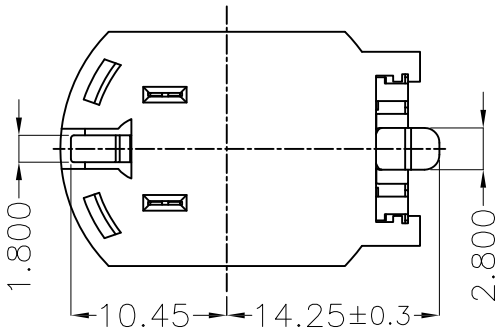

PACKAGED ON TAPE & REEL

SPECIFICATIONS:
Material:
Housing: (PPA) Hi-temp thermoplastic, Color: Brown
Contact: Phosphor Bronze, Gold plated
Electrical:
Contact resistance: 30 mohms max
Insulation resistance: 1,000 Mohms min
Dielectric Voltage: 500 VAC one sec level
Temperature Rating:
Operating temperature: -25°C to +85°C
Environmental:
Lead free, RoHS compliant

RoHS COMPLIANT

UNLESS OTHERWISE SPECIFIED
ALL DIMENSIONS ARE MILLIMETERS
TOLERANCES: EXCEPT AS NOTED

MM		ANGLE	
X.	± 0.30	X.	± 1°
.X	± 0.25	.X	± 0.5°
.XX	± 0.20		
.XXX	± 0.10		

APPROVALS		DATE
DRAWN	AY	6/29/17
CHECKED	AC	6/29/17
APPROVED		

ADAM TECH
909 Rahway Avenue,
Union, NJ 07083
Phone: 908-687-5000
Fax: 908-687-5710

TITLE: BATTERY HOLDER, SURFACE MOUNT, FOR CR2032, BROWN COLOR


SIZE	PART NO.	REV.
X	BH-74B-5-T/R	B

REF: S00136C | SCALE: NTS | SHEET 1 OF 2

Rev	AWO #	Description	Date	Appr
SEE SHT 1 OF 2 FOR REVISION				

APPROVED: _____

DATE: _____ TITLE: _____

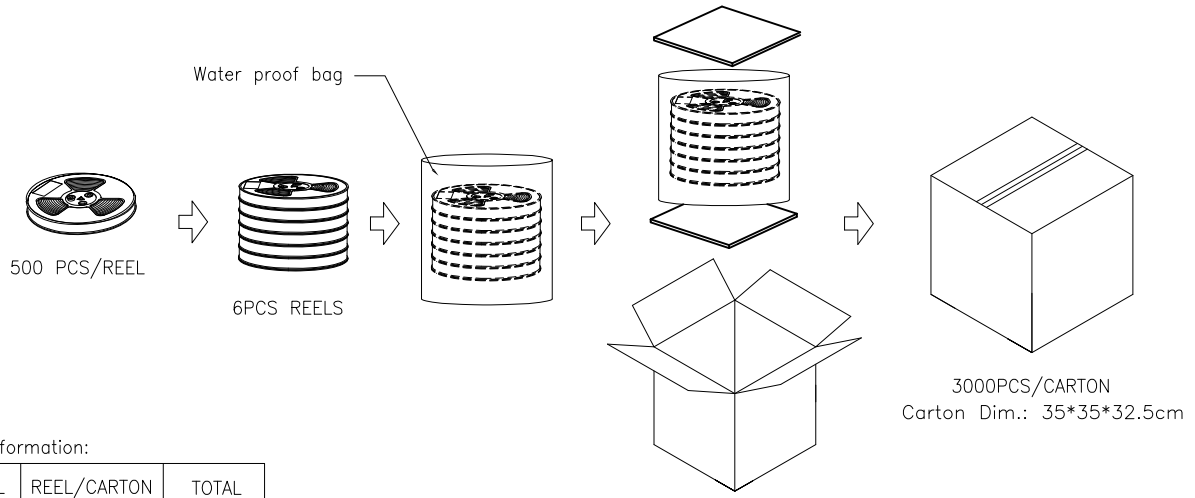

Packing Information:

PCS/REEL	REEL/CARTON	TOTAL
500 PCS	6 PCS	3000 PCS

UNLESS OTHERWISE SPECIFIED
ALL DIMENSIONS ARE MILLIMETERS
TOLERANCES: EXCEPT AS NOTED

MM		ANGLE	
X.	± 0.30	X.	± 1°
.X	± 0.25	.X	± 0.5°
.XX	± 0.20		
.XXX	± 0.10		

APPROVALS		DATE
DRAWN	AY	6/29/17
CHECKED	AC	6/29/17
APPROVED		

ADAM TECH
909 Rahway Avenue,
Union, NJ 07083
Phone: 908-687-5000
Fax: 908-687-5710

TITLE: BATTERY HOLDER, SURFACE MOUNT, FOR CR2032, BROWN COLOR

SIZE	PART NO.	REV.
X	BH-74B-5-T/R	B

REF:	SCALE:	SHEET
S00136C	NTS	2 OF 2