

Rev	AWO #	Description	Date	Appr
-		RELEASED	1/10/18	


APPROVED: _____


DATE: _____ TITLE: _____

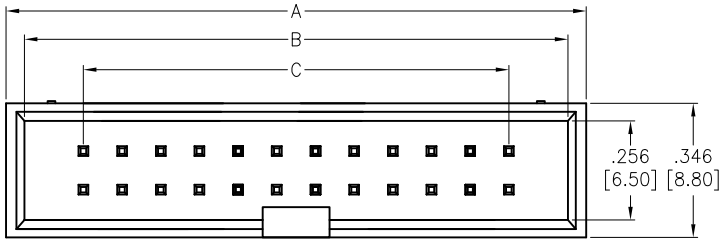

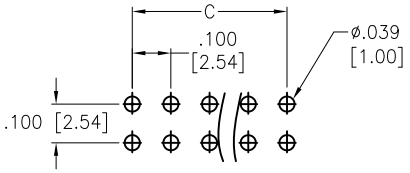

RECOMENDED PCB LAYOUT

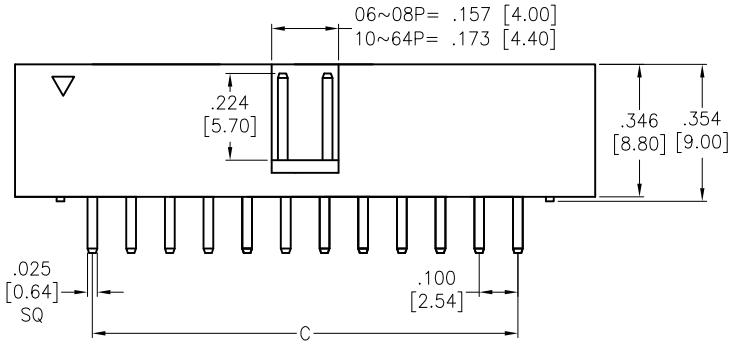



Positions: 06 thru 64

A = .100 [2.54] X No. of Positions per Row + .300 [7.62]

B = .100 [2.54] X No. of Positions per Row + .209 [5.32]

C = .100 [2.54] X No. of Spaces

SPECIFICATION:

Material:

Insulator: PBT, Glass reinforced, rated UL–94V–0, Color: Black

Contacts: Brass

Contact Plating:

Gold Flash over Nickel underplate overall

Electrical:

Current rating: 3 Amp.

Contact resistance: 20 mohms max

Insulation resistance: 1000 Mohms min

Dielectric withstanding voltage: 500 VAC

Temperature Rating:

–40° to +105°

Environmental:

Lead free, RoHS compliant. RoHS COMPLIANT

UNLESS OTHERWISE SPECIFIED
ALL DIMENSIONS ARE INCHES [MM]
TOLERANCES: EXCEPT AS NOTED

INCHES		HOLES	
.X	± .10	Ø.X	±.10
.XX	± .020	Ø.XX	±.015
.XXX	± .015	Ø.XXX	±.010

APPROVALS		DATE
DRAWN	AY	1/10/18
CHECKED	YC	1/10/18
APPROVED		

ADAM TECH
INTERCONNECTS
909 Rahway Avenue,
Union, NJ 07083
Phone: 908-687-5000
Fax: 908-687-5710

TITLE: BOX HEADER, VERTICAL PCB MOUNT, 2 ROW .100 PITCH, GOLD FLASH PLATED

SIZE	PART NO.	REV.
X	BHR-C-XX-VUA	-

REF: S00111C | SCALE: NTS | SHEET 1 OF 1