

Rev	AWO #	Description	Date	Appr
-		RELEASED	2/20/19	


APPROVED: _____


DATE: _____ TITLE: _____

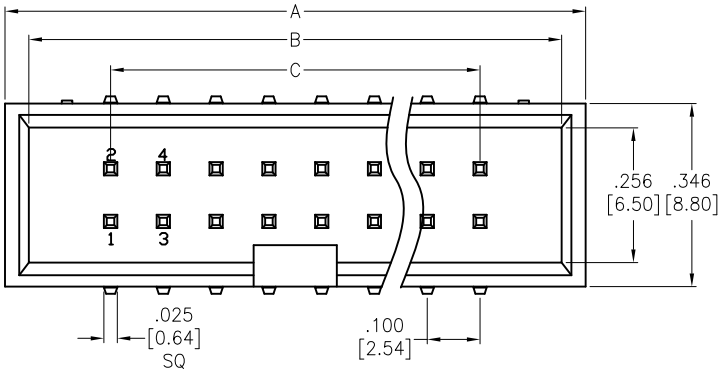

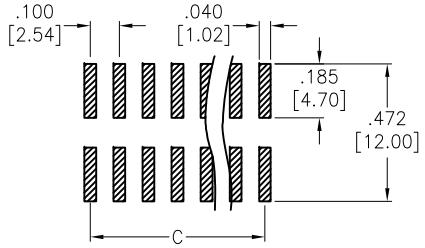

RECOMENDED PCB LAYOUT

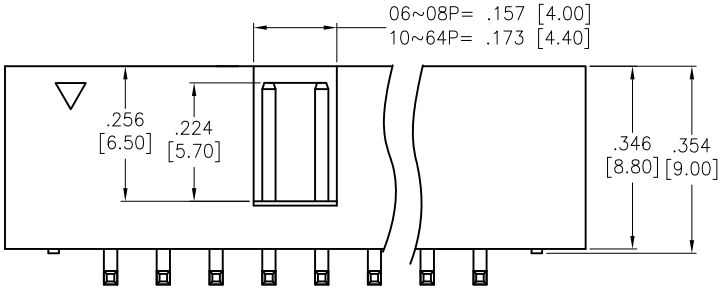



Positions: 06 thru 64

A = .100 [2.54] X No. of Positions per Row + .300 [7.62]

B = .100 [2.54] X No. of Positions per Row + .209 [5.32]

C = .100 [2.54] X No. of Spaces

SPECIFICATION:

Material:

Insulator: Hi–Temp Thermoplastic, rated UL 94V–0

Contacts: Brass

Contact Plating:

Gold Flash over Nickel underplate overall

Electrical:

Current rating: 3 Amp.

Contact resistance: 20 mohms max

Insulation resistance: 1000 Mohms min

Dielectric withstanding voltage: 500 VAC

Temperature Rating:

–40° to +105°

Environmental:

Lead free, RoHS compliant.

UNLESS OTHERWISE SPECIFIED
ALL DIMENSIONS ARE INCHES [MM]
TOLERANCES: EXCEPT AS NOTED

INCHES		HOLES	
.X	± .10	Ø.X	±.10
.XX	± .020	Ø.XX	±.015
.XXX	± .015	Ø.XXX	±.010

APPROVALS		DATE
DRAWN	AY	2/20/19
CHECKED	DH	2/20/19
APPROVED		

ADAM TECH INTERCONNECTS
909 Rahway Avenue,
Union, NJ 07083
Phone: 908-687-5000
Fax: 908-687-5710

TITLE: BOX HEADER, VERTICAL, SMT TYPE
2 ROW .100 PITCH, GOLD FLASH PLATED

SIZE	PART NO.	REV.
X	BHR-C-XX-VUA-SMT	-

REF: S00111C | SCALE: NTS | SHEET 1 OF 1