
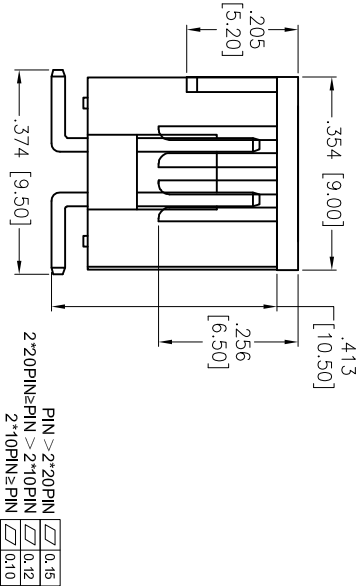
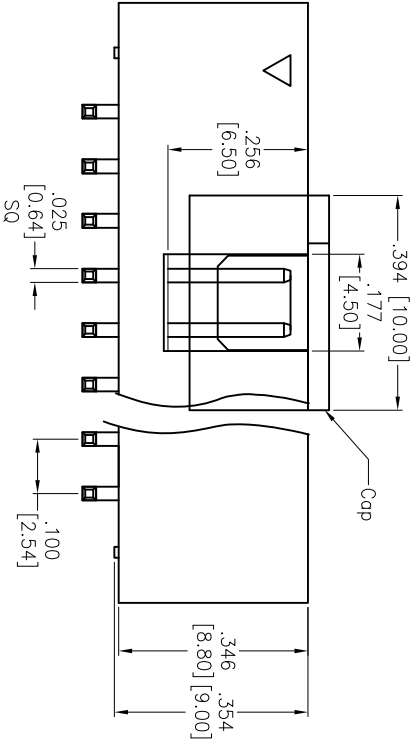
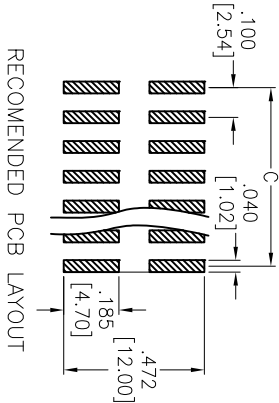


Rev	AWO #	Description	Date	Appr
-		RELEASED	3/22/18	
A		UPDATE DRAWING	10/2/18	AV/LW
B		UPDATE DRAWING	7/26/21	AV/NL
C		UPDATED SPEC.	10/4/21	JJ/YC1
D		UPDATE DRAWING	3/22/23	WX/YC1
E		UPDATE DIM.	3/26/24	WX/MC

APPROVED: _____
DATE: _____ TITLE: _____

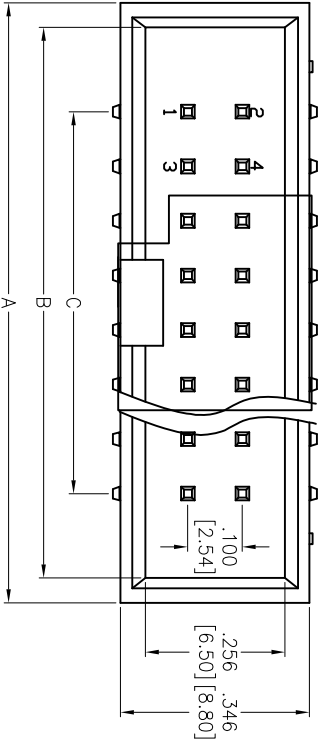

SPECIFICATION:

Material:

Insulator: Hi-Temp Thermoplastic, rated UL 94V-0

Insulator color: Black

Contacts: Brass

Plating:

Gold Flash over Nickel underplate overall

Electrical:

Current rating: 3 Amp.

Contact resistance: 20 mohms max

Insulation resistance: 1000 Mohms min

Dielectric withstanding voltage: 500 VAC for 1 minute

Temperature Rating:

-40° to +105°

Environmental:

Lead free, RoHS compliant



PACKAGED ON TAPE & REEL

Positions: 06 thru 64

A = .100 [2.54] X No. of Positions per Row + .300 [7.62]

B = .100 [2.54] X No. of Positions per Row + .214 [5.44]

C = .100 [2.54] X No. of Spoces

UNLESS OTHERWISE SPECIFIED ALL DIMENSIONS ARE INCHES [MM]. TOLERANCES: EXCEPT AS NOTED

INCHES HOLES
X ± .10 ØX ± .10
XX ± .020 ØXX ± .015
XXX ± .015 ØXXX ± .010

ADAM
TECH

909 Rahway Avenue,
Union, NJ 07083
Phone: 908-687-5000
Fax: 908-687-5710

DRAWN	AY	3/22/18
CHECKED	MY	3/22/18
APPROVED		

TITLE BOX HEADER, VERTICAL, SMT TYPE			
2 ROW, .100 PITCH, GOLD FLASH PLATED			
SIZE X	PART NO. BHR-C-XX-VUA-SMT-PP-T/R	REV. E	
REF: 500111C	SCALE: NTS	SHEET 1 OF 1	