
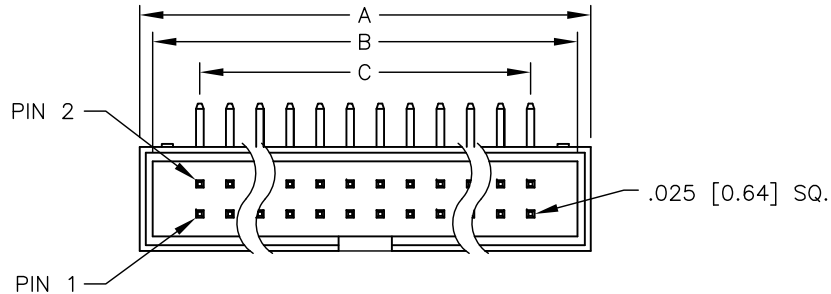
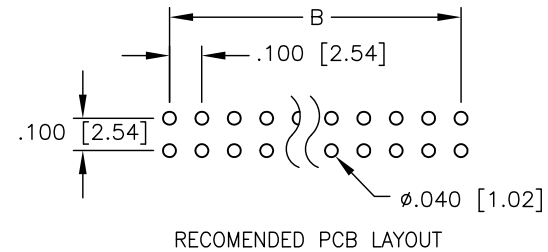
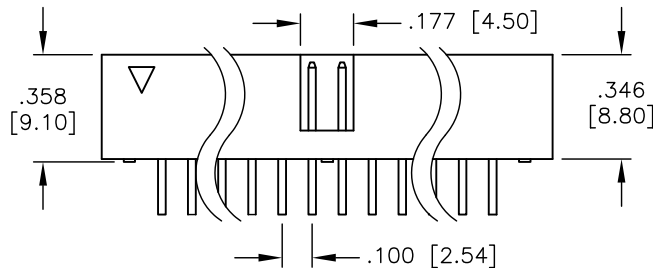


APPROVED: _____

DATE: _____ TITLE: _____

Rev	AWO #	Description	Date	Appr
-		RELEASED	3/25/05	

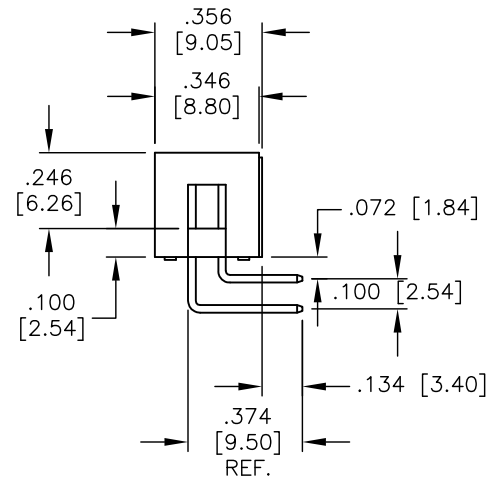

SPECIFICATION:

Material:

Insulator: PBT, glass reinforced, rated UL-94V-0

Insulator color: Black

Contacts: Brass

Contact Plating:

Tin over Copper underplate overall

Electrical:

Current rating: 1 Amps max.

Contact resistance: 20 mohms max

Insulation resistance: 5000 Mohms min

Dielectric withstanding voltage: 500 VAC for 1 minute

Temperature Rating:

Operating temperature: -40°C TO +105°C

Environmental:

Lead free, RoHS compliant.



A = .100 [2.54] X No. of Positions /2 + .300 [7.60]

B = .100 [2.54] X No. of Positions /2 + .200 [5.08]

C = .100 [2.54] X No. of Spaces

UNLESS OTHERWISE SPECIFIED
ALL DIMENSIONS ARE INCHES [MM]
TOLERANCES: EXCEPT AS NOTED
INCHES HOLES
.X ± .10 Ø.X ± .10
.XX ± .020 Ø.XX ± .015
.XXX ± .015 Ø.XXX ± .010

APPROVALS		DATE
DRAWN	SS	3/25/05
CHECKED		
APPROVED		

ADAM TECH

909 Rahway Avenue, Union, NJ 07083

Phone: 908-687-5000 Fax: 908-687-5710

TITLE
.100 [2.54] BOX HEADER, RIGHT ANGLE,
TIN PLATED, STANDARD SOLDER TAIL

SIZE	PART NO.	REV.
X	BHR-XX-HTA	-
REF:	SCALE: NTS	SHEET 1 OF 1