

Rev	AWO #	Description	Date	Appr
-		RELEASED	02/15/16	


APPROVED: _____

DATE: _____ TITLE: _____

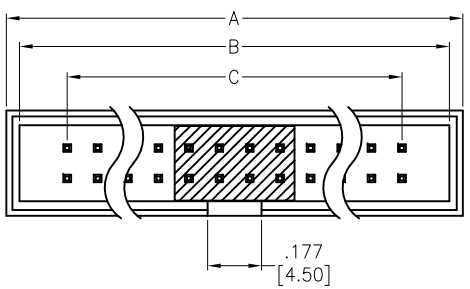


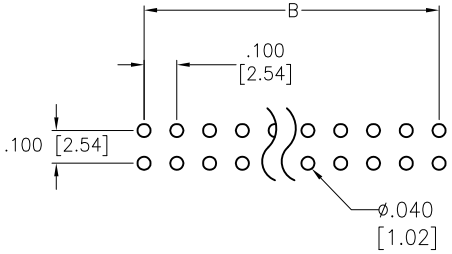


RECOMENDED PCB LAYOUT



60, 64 PIN

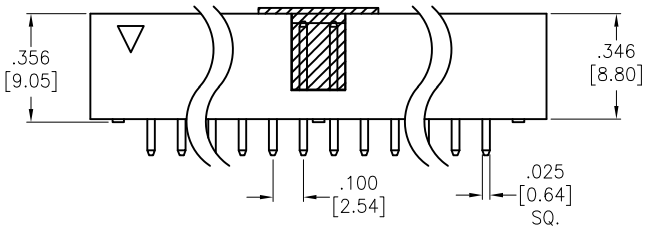



SPECIFICATIONS:
Material:
Insulator: Hi-temp thermoplastic, rated UL 94V-0
Insulator Color: Black
Contacts: Brass
Plating:
Gold flash over Nickel underplate on contact area,
Tin over Copper underplate on PCB tails
Electrical:
Voltage Rating: 250V AC
Current rating: 3 Amp.
Contact resistance: 20 mohms max
Insulation resistance: 5000 Mohms min @ 500 VDC
Dielectric withstanding voltage: 500 VAC for 1 minute
Temperature Rating:
Operating temperature: -40°C to +105°C
Environmental:
Lead free, RoHS compliant.

RoHS COMPLIANT

PACKAGED ON TAPE & REEL

A = .100 [2.54] X No. of Positions /2 + .300 [7.62]
B = .100 [2.54] X No. of Positions /2 + .213 [5.40]
C = .100 [2.54] X No. of Spaces

UNLESS OTHERWISE SPECIFIED
ALL DIMENSIONS ARE INCHES [MM]
TOLERANCES: EXCEPT AS NOTED

INCHES		HOLES	
.X	± .10	Ø.X	±.10
.XX	± .020	Ø.XX	±.015
.XXX	± .015	Ø.XXX	±.010

APPROVALS		DATE
DRAWN	TW	02/15/16
CHECKED		
APPROVED		

ADAM TECH
909 Rahway Avenue, Union, NJ 07083
Phone: 908-687-5000 Fax: 908-687-5710

TITLE: BOX HEADER, VERTICAL PCB MOUNT, 2 ROW .100 [2.54] PITCH, SEL-GOLD FLASH

SIZE	PART NO.	REV.
X	BHR-XX-VSGA-HT-PP-T/R	-

REF: S00059T | SCALE: NTS | SHEET 1 OF 1