

Rev	AWO #	Description	Date	Appr
-		RELEASED	3/25/05	


APPROVED: _____


DATE: _____ TITLE: _____

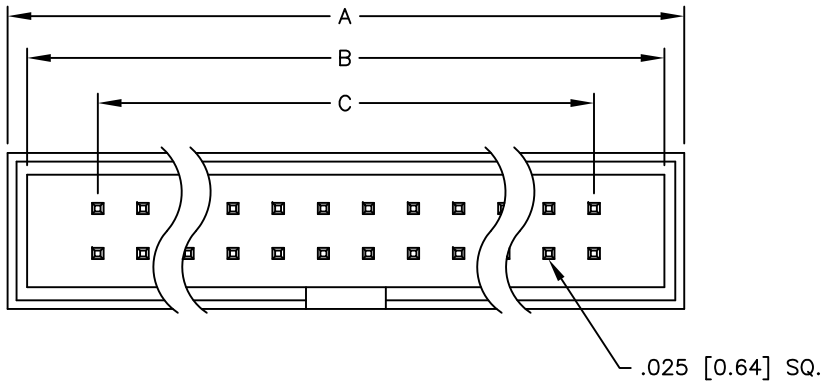

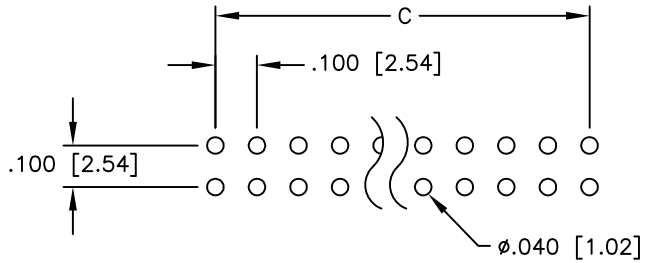

PCB LAYOUT

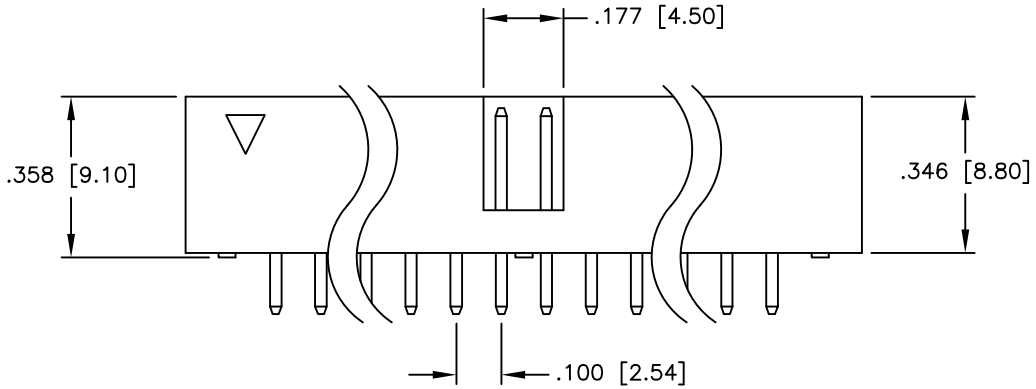

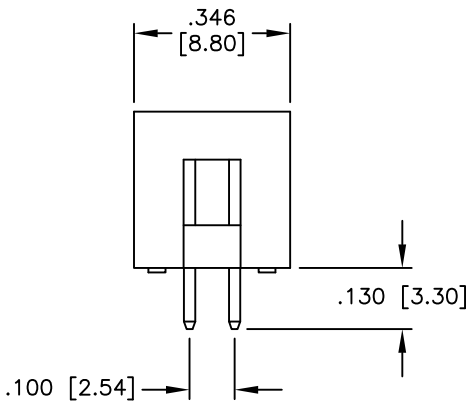

SPECIFICATIONS:
Material:
Insulator: PBT, Glass filled, rated UL 94V–0
Insulator color: Black
Contacts: Brass
Plating:
Tin over Copper underplate overall
Electrical:
Operating voltage: 250 VAC max.
Current rating: 3 Amp max.
Contact resistance: 20 mohms max. initial
Insulation resistance: 5,000 Mohms min.
Dielectric withstanding voltage: 1,000 VAC for 1 minute
Temperature Rating:
Operating temperature: –55°C to +105°C
Environmental:
Lead free, RoHS compliant
Recommended soldering temp: 230°C for 5 seconds

RoHS COMPLIANT

Positions: 8, 10, 14, 16, 20, 24, 26, 30, 34, 40, 44, 50, 60, 64
A = .100 [2.54] x No. of Positions/2 + .300 [7.62]
B = .100 [2.54] x No. of Spaces/2 + .200 [5.08]
C = .100 [2.54] x No. of Spaces

UNLESS OTHERWISE SPECIFIED
ALL DIMENSIONS ARE INCHES [MM]
TOLERANCES: EXCEPT AS NOTED

INCHES		HOLES	
.X	± .10	Ø.X	±.10
.XX	± .020	Ø.XX	±.015
.XXX	± .015	Ø.XXX	±.010

APPROVALS		DATE
DRAWN	SS	3/25/05
CHECKED		
APPROVED		

ADAM TECH
909 Rahway Avenue, Union, NJ 07083
Phone: 908-687-5000 Fax: 908-687-5710

TITLE
.100 [2.54] BOX HEADER, STRAIGHT,
TIN PLATED, STANDARD SOLDER TAIL

SIZE	PART NO.	REV.
X	BHR-XX-VTA	-

REF: | SCALE: NTS | SHEET 1 OF 1