

Rev	AWO #	Description	Date	Appr
-		RELEASED	11/24/09	


APPROVED: _____


DATE: _____ TITLE: _____

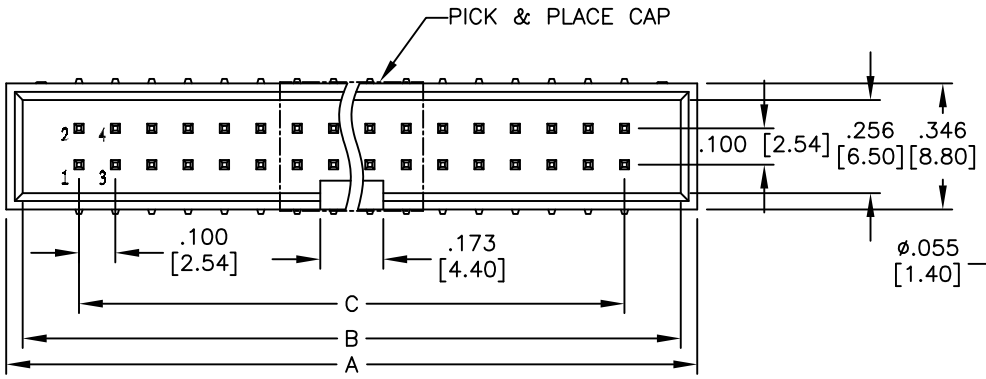

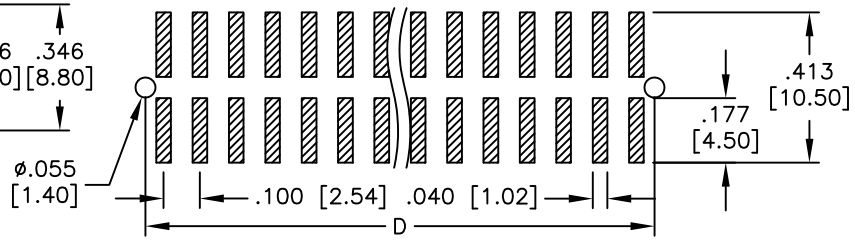

RECOMMENDED PCB LAYOUT

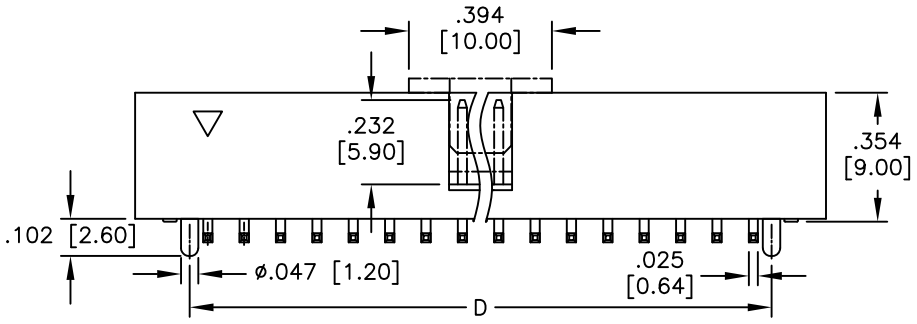

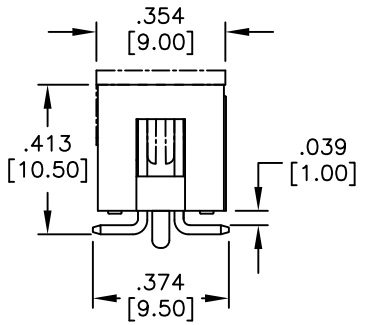

PACKAGED ON TAPE & REEL

Positions: 10 thru 64

A = .100 [2.54] X No. of Positions per row + .300 [7.62]

B = .100 [2.54] X No. of Positions per row + .209 [5.32]

C = .100 [2.54] X No. of Spaces

D = .100 [2.54] X No. of Positions per row

SPECIFICATIONS:
Material:
Insulator: Nylon 6T, rated UL 94V-0
Insulator color: Black
Contacts: Brass
Plating:
Gold Flash over Nickel underplate overall.
Electrical:
Current rating: 3 Amps max
Contact resistance: 20 mohms max
Insulation resistance: 1000 Mohms min
Dielectric withstanding voltage: 500 VAC for 1 minute
Temperature Rating:
Operating temperature: -40°C to +105°C
Environmental:
Lead free, RoHS Compliant
Recomended soldering temp: 260°C for 5 seconds

RoHS COMPLIANT

UNLESS OTHERWISE SPECIFIED
ALL DIMENSIONS ARE MM [INCHES]
TOLERANCES: EXCEPT AS NOTED

INCHES		HOLES	
.X	± .10	Ø.X	±.10
.XX	± .020	Ø.XX	±.015
.XXX	± .015	Ø.XXX	±.010

APPROVALS		DATE
DRAWN	DY	11/24/09
CHECKED		
APPROVED		

ADAM TECH
909 Rahway Avenue, Union, NJ 07083
Phone: 908-687-5000 Fax: 908-687-5710

TITLE: BOX HEADER, VERTICAL, SMT TYPE GOLD PLATED

SIZE	PART NO.	REV.
X	BHR-XX-VUA-SMT-P-PP-T/R	-

REF: S00019C | SCALE: NTS | SHEET 1 OF 1