
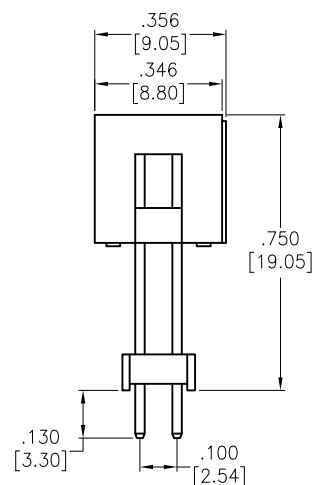
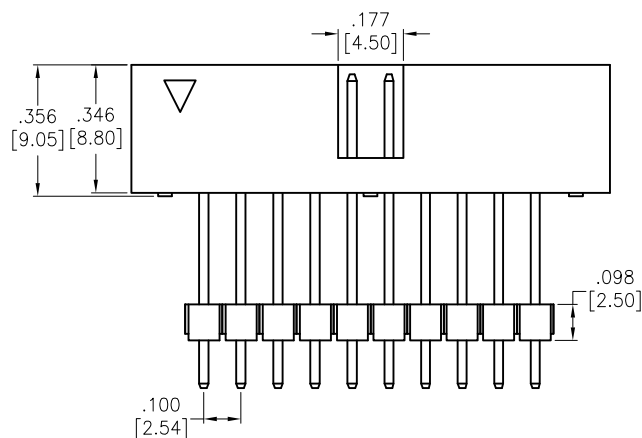
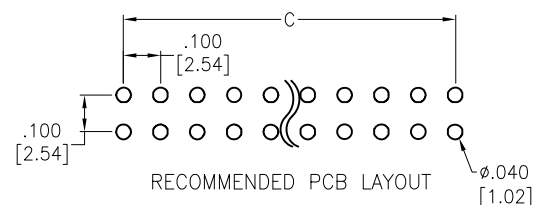


DATE: _____ TITLE: _____

Rev	AWO #	Description	Date	Appr
-		RELEASED	11/12/13	
A		ADDED POSITIONS OPTION	11/11/15	HR/LL
B		UPDATE SPEC.	8/3/21	LH/RL

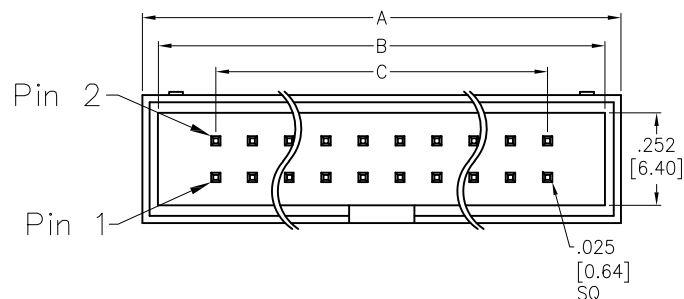

SPECIFICATIONS:

Material:

Insulator: PBT, rated UL 94V-0

Insulator color: Black

Contacts: Brass

Plating:

Gold flash over Nickel underplate.

Electrical:

Current rating: 8 Amp max.

Contact resistance: 20 mohms max. @DC 100mA

Insulation resistance: 5,000 Mohms min. @500VDC

Dielectric withstanding voltage: 500 VAC for 1 minute

Temperature Rating:

Operating temperature: -40°C to $+105^{\circ}\text{C}$

Environmental:

Lead free, RoHS compliant



Positions: 6, 8, 10, 12, 14, 16, 20, 30, 40, 44, 50, 60 & 64

$$A = .100 [2.54] \times \text{No. of Spaces} + .399 [10.14]$$
$$B = .100 [2.54] \times \text{No. of Spaces} + .313 [7.94]$$
$$C = .100 [2.54] \times \text{No. of Spaces}$$

UNLESS OTHERWISE SPECIFIED ALL DIMENSIONS ARE INCHES [MM]. TOLERANCES: EXCEPT AS NOTED			ADAM TECH		909 Rahway Avenue, Union, NJ 07083 Phone: 908-687-5000 Fax: 908-687-5710															
<table><tr><th colspan="2">INCHES</th><th colspan="2">HOLES</th></tr><tr><td>.X</td><td>± .10</td><td>Ø.X</td><td>±.10</td></tr><tr><td>.XX</td><td>± .020</td><td>Ø.XX</td><td>±.015</td></tr><tr><td>.XXX</td><td>± .015</td><td>Ø.XXX</td><td>±.010</td></tr></table>					INCHES		HOLES		.X	± .10	Ø.X	±.10	.XX	± .020	Ø.XX	±.015	.XXX	± .015	Ø.XXX	±.010
INCHES		HOLES																		
.X	± .10	Ø.X	±.10																	
.XX	± .020	Ø.XX	±.015																	
.XXX	± .015	Ø.XXX	±.010																	
DRAWN	TW	11/12/13	TITLE .100 [2.54] BOX HEADER, STRAIGHT, GOLD PLATED																	
CHECKED																				
APPROVED																				
THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY AND SHOULD NOT BE USED WITHOUT PRIOR WRITTEN PERMISSION FROM ADAM TECH			SIZE X	PART NO. BHRE-XX-VUA-.750		REV B														
			REF: S00059T	SCALE: NTS	SHEET 1 OF 1															